
Kingbright

4mm CYLINDRICAL LED LAMP

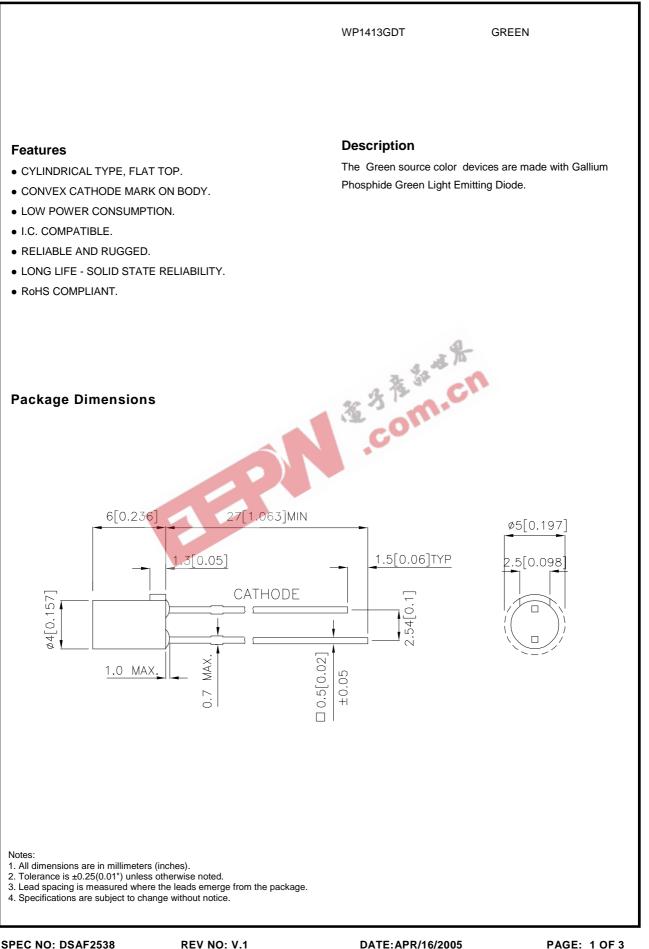

APPROVED: J. Lu

CHECKED: Allen Liu

DATE:APR/16/2005 DRAWN: B.H.LI PAGE: 1 OF 3 ERP: 1101001454

Kingbright

Selection Guide					
Part No.	Dice	Lens Type	lv (mcd) @ 10mA		Viewing Angle
			Min.	Тур.	201/2
WP1413GDT	GREEN (GaP)	GREEN DIFFUSED	1	3	100°

Note:

1. θ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	I⊧=20mA
λD	Dominant Wavelength	Green	568		nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30	k 34	nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
Vf	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lr	Reverse Current	Green		10	uA	VR = 5V



Absolute Maximum Ratings at TA=25°C

Parameter	Green	Units	
Power dissipation	105	mW	
DC Forward Current	25	mA	
Peak Forward Current [1]	140	mA	
Reverse Voltage	5	V	
Operating/Storage Temperature	-40°C To +85°C		
Lead Solder Temperature [2]	260°C For 3 Seconds		
Lead Solder Temperature [3]	260°C For 5 Seconds		


Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.

2. 2mm below package base.

3. 5mm below package base.

Kingbright

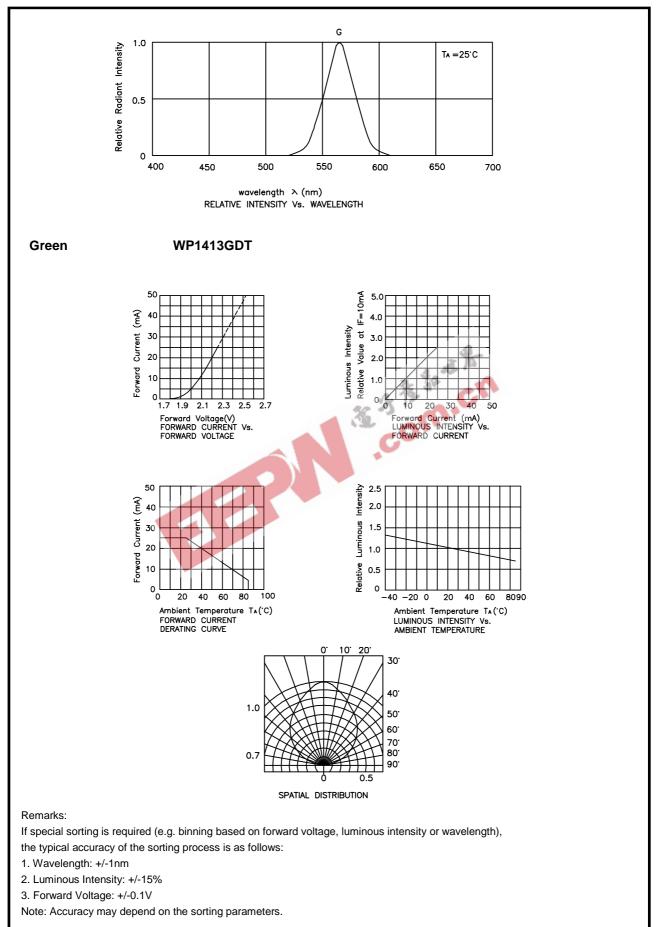

REV NO: V.1 CHECKED: Allen Liu DATE:APR/16/2005 DRAWN: B.H.LI PAGE: 3 OF 3 ERP: 1101001454