

### 2mmx5mm RECTANGULAR SOLID LAMP

WP103GDT

GREEN

PAGE: 1 OF 3


ERP:1101000369

#### **Features**

- LOW POWER CONSUMPTION.
- RELIABLE AND RUGGED.
- EXCELLENT UNIFORMITY OF LIGHT OUTPUT.
- SUITABLE FOR LEVEL INDICATOR.
- LONG LIFE SOLID STATE RELIABILITY.
- RoHS COMPLIANT.

# **Description**

The Green source color devices are made with Gallium Phosphide Green Light Emitting Diode.

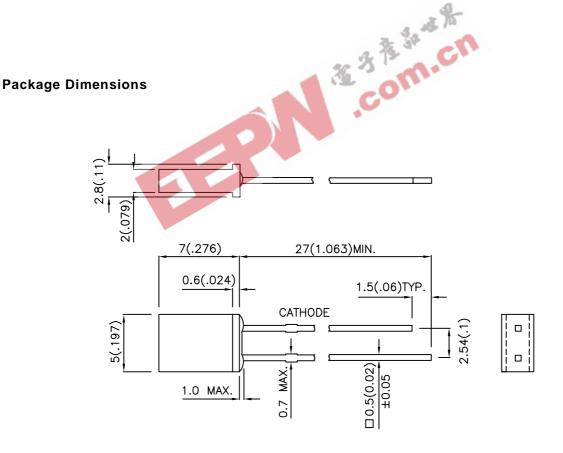

- Notes:
  1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25(0.01") unless otherwise noted.

  3. Lead spacing is measured where the leads emerge from the package.
- 4. Specifications are subject to change without notice.

SPEC NO: DSAF2570 **REV NO: V.1** DATE: APR/16/2005 APPROVED: J. Lu **CHECKED: Allen Liu** DRAWN: Y.W.WANG

# Kingbright

## **Selection Guide**

Part No.	Dice	Lens Type	lv (mcd) @ 10mA		Viewing Angle
			Min.	Тур.	201/2
WP103GDT	GREEN (GaP)	GREEN DIFFUSED	1.8	5	110°

### Note:

# Electrical / Optical Characteristics at T<sub>A</sub>=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Green	565		nm	IF=20mA
λD	Dominant Wavelength	Green	568	-	nm	IF=20mA
Δλ1/2	Spectral Line Half-width	Green	30	40	nm	IF=20mA
С	Capacitance	Green	15		pF	VF=0V;f=1MHz
VF	Forward Voltage	Green	2.2	2.5	V	IF=20mA
lR	Reverse Current	Green	C	10	uA	VR = 5V

# Absolute Maximum Ratings at Ta=25°C

Parameter	Green	Units		
Power dissipation	105	mW		
DC Forward Current	25	mA		
Peak Forward Current [1]	140	mA		
Reverse Voltage	5	V		
Operating / Storage Temperature	-40°C To +85°C			
Lead Solder Temperature [2]	260°C For 3 Seconds			
Lead Solder Temperature [3]	260°C For 5 Seconds			

#### Notes:


- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
- 3. 5mm below package base.

 SPEC NO: DSAF2570
 REV NO: V.1
 DATE: APR/16/2005
 PAGE: 2 OF 3

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: Y.W.WANG
 ERP:1101000369

<sup>1.</sup>  $\theta$ 1/2 is the angle from optical centerline where the luminous intensity is 1/2 the optical centerline value.

# **Kingbright**

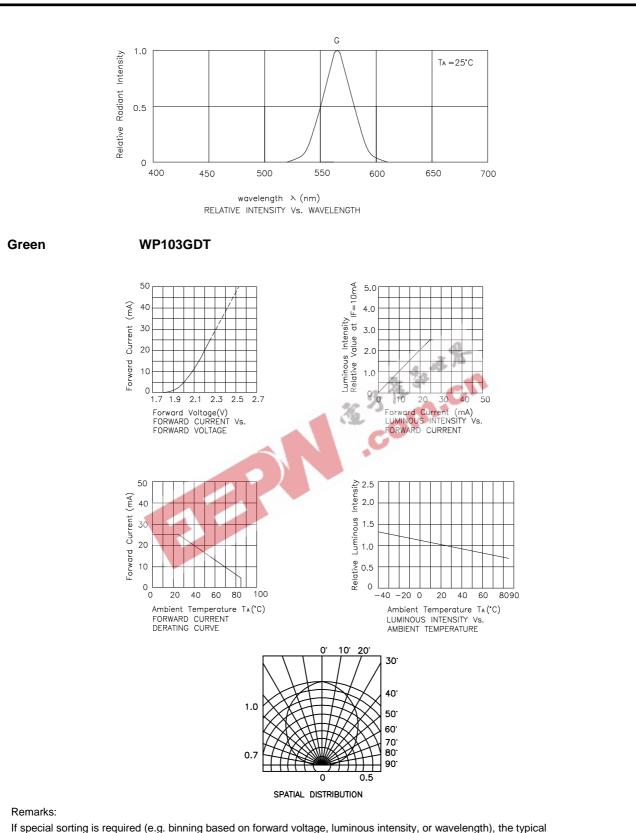

If special sorting is required (e.g. binning based on forward voltage, luminous intensity, or wavelength), the typical accuracy of the sorting process is as follows:

- 1. Wavelength: +/-1nm
- 2. Luminous Intensity: +/-15%
- 3. Forward Voltage: +/-0.1V

Note: Accuracy may depend on the sorting parameters.

 SPEC NO: DSAF2570
 REV NO: V.1
 DATE: APR/16/2005
 PAGE: 3 OF 3

 APPROVED: J. Lu
 CHECKED: Allen Liu
 DRAWN: Y.W.WANG
 ERP:1101000369