

**Omnidirectional Back Electret Condenser Microphone Cartridge**

Series: **WM-60A**



■ **Features**

- Small microphones for general use
- Back electret type designed for high resistance to vibrations

■ **Sensitivity**


Vs = 2.0V  
RL = 2.2kΩ

X: -46 ± 3dB  
T: -44 ± 3dB  
Y: -42 ± 3dB

■ **Specifications**

Sensitivity	-44 ± 5dB (0db = 1V/pa, 1kHz)
Impedance	Less than 2.2 kΩ
Directivity	Omnidirectional
Frequency	20-20,000 Hz
Max. operation voltage	10V
Standard operation voltage	2V
Current consumption	Max. 0.5 mA
Sensitivity reduction	Within -3 dB at 1.5V
S/N ratio	More than 58 dB

■ **Typical Frequency Response Curve**

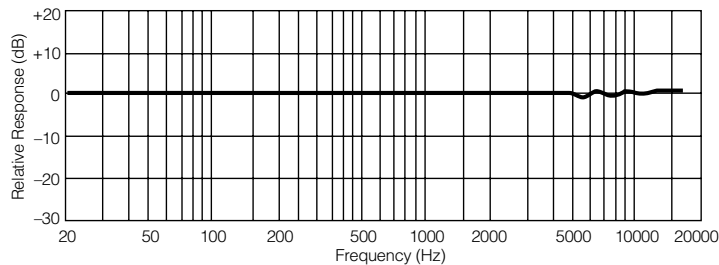

■ **Dimensions in mm (not to scale)**

WM-60A

