


WPN30R

30 Watt Single Output Half Brick DC/DC Converter



- 36 - 75V Input Range
- Industry Standard Pinouts
- Input & Output Filtering
- Extended Temperature Range: -40°C to +100°C Baseplate
- Remote On/Off Function
- Input Reverse Voltage Protection
- Fixed Frequency Operation
- Short Circuit Protection
- UL/CUL 60950, VDE EN60950

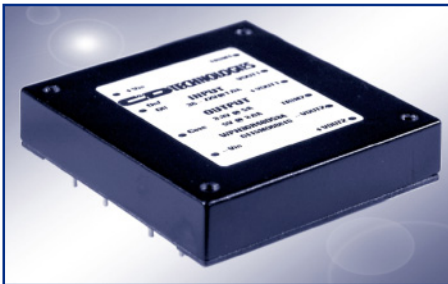

The WPN30R Series is a family of high performance DC/DC converters. The unit is housed in a space-saving shell and combines low cost with high performance across all line and load conditions. An output trim feature is provided, allowing the user to compensate for long line lengths. The WPN30R Series is assembled by a fully automated process using

surface mount components for increased reliability. Through-holes are provided to simplify unit mounting or the addition of a heatsink for high temperature applications. Other features include:


- Full Regulation Down to Zero Load
- Under Voltage Lock-Out, Auto-Start

- Internal Temperature Shutdown, Auto-Reset
- Soft Start
- Remote On/Off (Available in Positive or Negative Logic)
- Remote Sense
- Over Current Protection
- Output Over Voltage Protection
- Output Voltage Adjust

PRODUCT SELECTION CHART

MODEL	NOMINAL INPUT VOLTAGE (VDC)	RATED OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT			INPUT CURRENT NOM LOAD (A)	EFFICIENCY (%)
			MIN LOAD(A)	NOM LOAD (A)	MAX LOAD (A)		
WPN30R48S03	48	3.3	0.0	9.0	11.0	0.755	82
WPN30R48S05	48	5.0	0.0	6.0	7.5	0.744	84
WPN30R48S12	48	12	0.0	2.5	3.0	0.718	87
WPN30R48S15	48	15	0.0	2.0	2.4	0.718	87

THERMAL DERATING CURVE

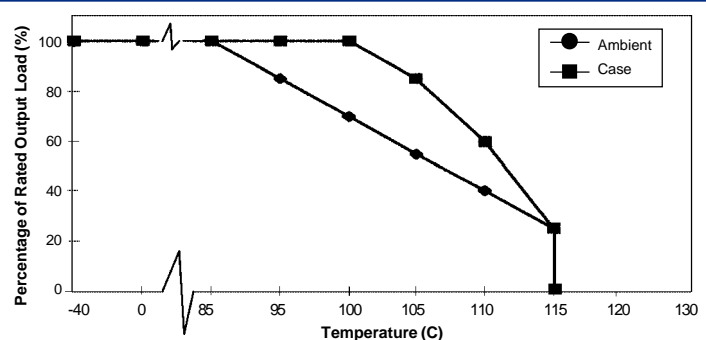








SPECIFICATIONS, ALL MODELS

Specifications are at $T_{CASE} = +40^{\circ}C$ nominal input voltage unless otherwise specified.

INPUT	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
	INPUT						
	Voltage Range	WPN30R48xyzz	36	48	75	VDC	
	Reflected Ripple Current			50	75	mA	
	INPUT CONTROL						
	Temperature Shutdown				107	$^{\circ}C$	
	Temperature Hysteresis				5	$^{\circ}C$	
	Quiescent Standby Current	Current into & Vin		8	10	mA	
	Under Voltage Shutdown	WPN30R48xyzz		32.5		V	
	Under Voltage Hysteresis	WPN30R48xyzz		1		V	

GENERAL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
	ISOLATION						
	Rated Voltage		1500			VDC	
	Resistance			10		G Ω	
	Capacitance			1000		pF	
	Leakage Current	240VAC			100	μ Arms	
	OUTPUT						
	Rated Power				30	W	
	Voltage Setpoint Accuracy						
	Single Output				± 1.5	%	
	Temperature Coefficient				± 0.2	$\%/^{\circ}C$	
	Line Regulation	High Line to Low Line					
	Single Output				± 0.1	%	
	Load Regulation	Min. Load to Nom Load					
	Single Output				± 0.4	%	
	Ripple & Noise						
	Single Output	BW = 5Hz to 20 MHz		50	80	mVp-p	
	Output Adjust Range	All Outputs		± 9.5		%	
	Output Adjust Current	Current Sourced/Sunk by Vadj Pin			± 0.5	mA	
	Short Circuit Protection						
	Single Output				7.5	A	
	GENERAL						
	Switching Frequency				300	kHz	
	MTTF per MIL-HDBK-217	Circuit Stress Method					
	Ground Benign	TA = +25 $^{\circ}C$, Unmodified Database			1,500,000	Hr	
	Package Weight			90		g	
	TEMPERATURE						
	Operation/Specification	Case Temperature		-40		$^{\circ}C$	
	Storage	Case Temperature		-55		$^{\circ}C$	
	Shutdown Temperature	Case Temperature		+105		$^{\circ}C$	
Thermal Impedance, Case-Ambient				7	$^{\circ}C/W$		

PERFORMANCE GRAPHS

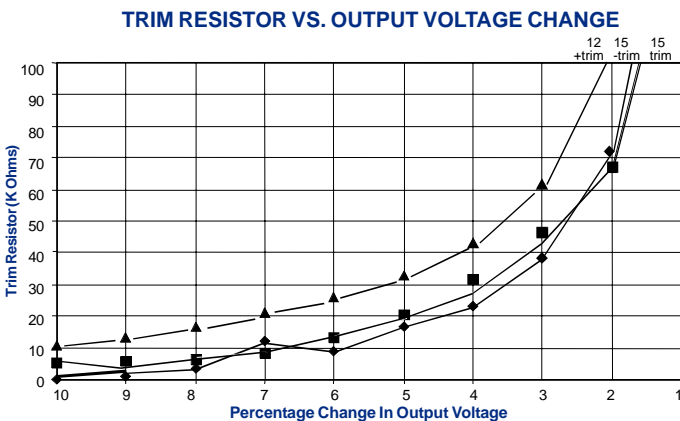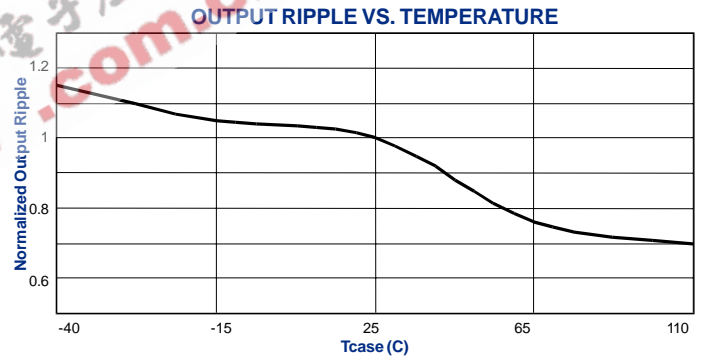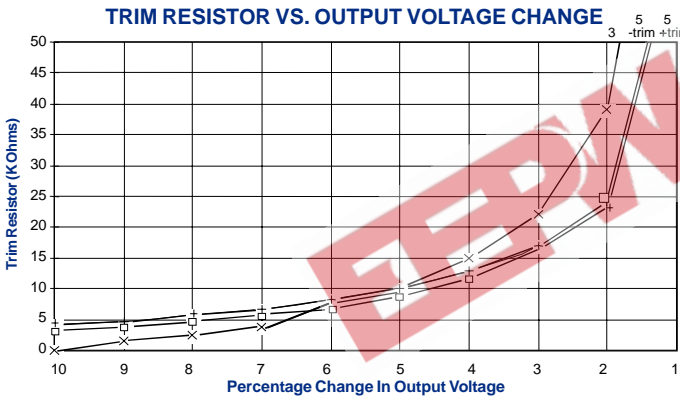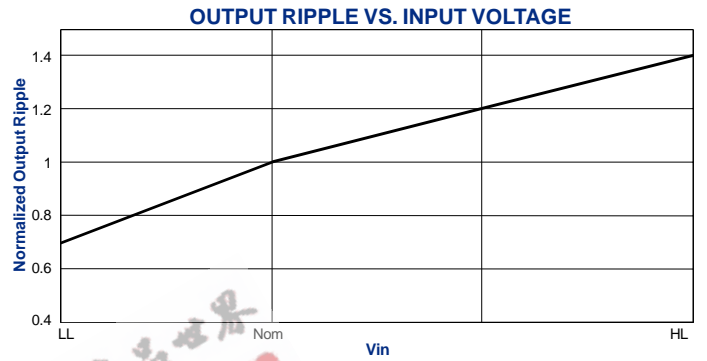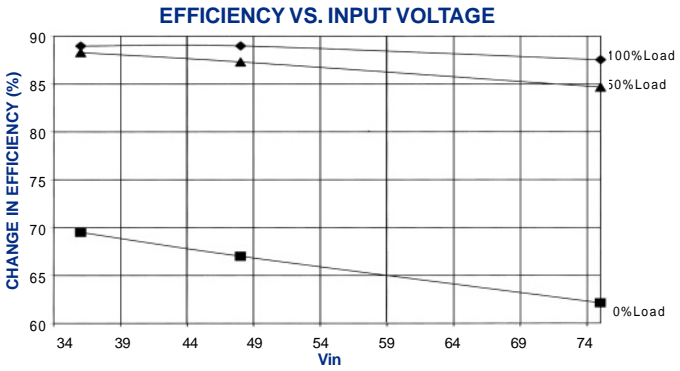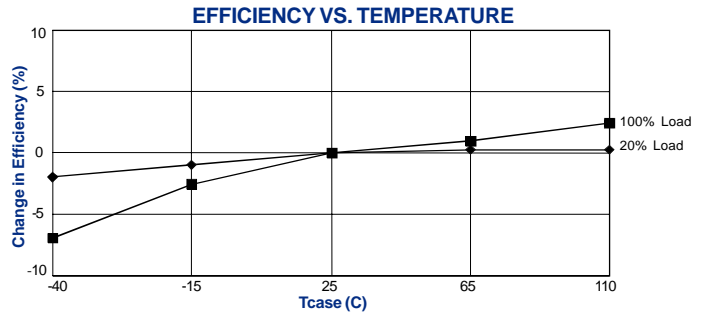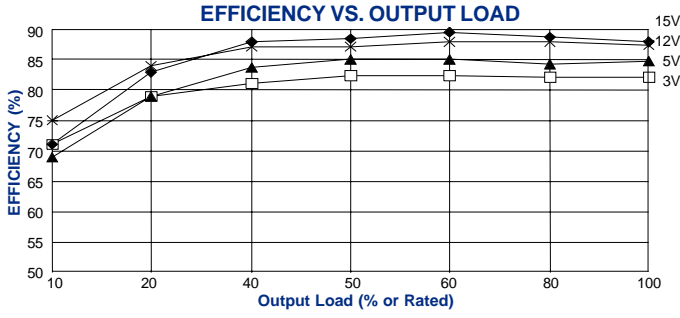



HYSTERESIS GRAPH

Undervoltage Lockout Threshold Voltages

Nominal Input Voltage Range	Shutdown Low Voltage (V1) OFF	Shutdown High Voltage (V2) ON
48	32.5	33.5

Specifications typical at TA=25°C, rated output current.

MECHANICAL

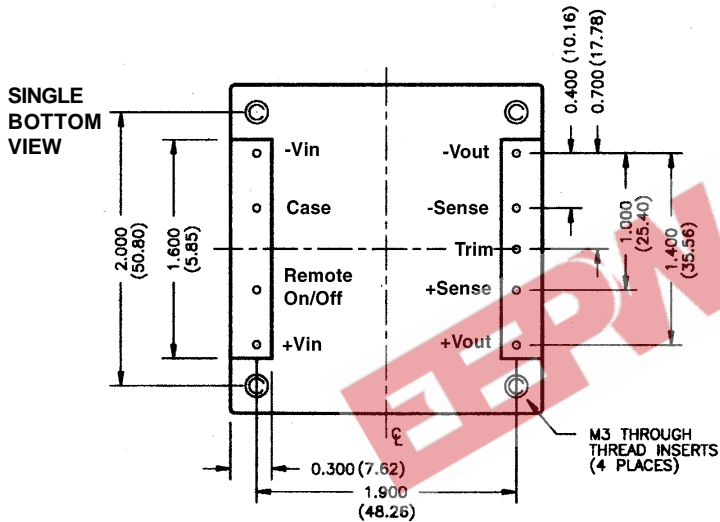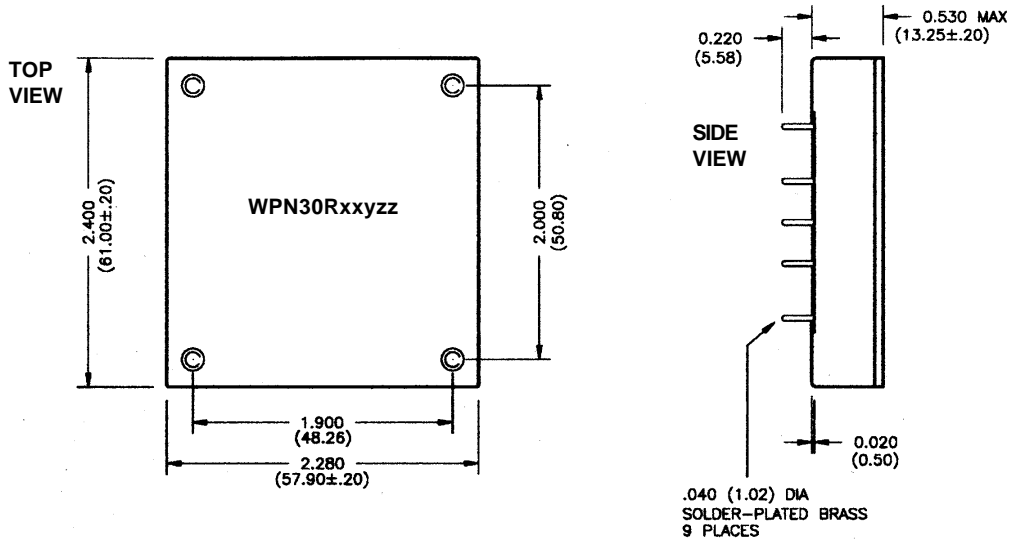

NOTES
 All dimensions are in inches (millimeters).
 Unless stated otherwise, dimensional tolerance $\pm 0.010"$ ($\pm 0.2\text{mm}$).
 Pin placement tolerance: $\pm 0.015"$ ($\pm 0.2\text{mm}$).
 Marked with specific model ordered, date, code, job code.
MATERIAL: Lead material is brass with a solder plated surface to allow ease of solderability.

ORDERING INFORMATION

WPN30R **xxyyzz** -

Device Family _____
 Indicated 30 Watt Regulated DC/DC Converter

Model Number _____
 Selected from Table of Electrical Characteristics
 Where:
 xx = Input Voltage
 yy = Number of Outputs (Single "S")
 zz = Output Voltage

Remote On/Off Logic _____
 Positive Logic - No Number
 Negative Logic - 1

Power Electronics Division, Americas
 3400 E Britannia Drive, Tucson, Arizona 85706
 Tel: 800.547.2537 Fax: 520.295.4197

C&D Technologies, EMEA/Asia/Pacific
 Milton Keynes MK14 5BU UK
 Tel: +44 (0)1908 615232 Fax: +44 (0)1908 617545

Any data, prices, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application. C&D Technologies, Inc. does not warrant or recommend that any of its products be used in any life support or aviation or aerospace applications.