

YG911S3R

(300V / 5A TO-220F15)

LOW LOSS SUPER HIGH SPEED DIODE

■ Features

- Low VF
- Super high speed switching.
- High reliability by planer design.

■ Applications

- High speed power switching.

■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive peak reverse voltage	V_{RRM}		300	V
Repetitive peak surge reverse voltage	V_{RSM}		300	V
Isolation voltage	V_{iso}	Terminals to Case, AC. 1min.	1500	V
Average output current	I_o	duty=1/2, $T_c=128^\circ C$ Rectangl wave	5	A
Surge current	I_{FSM}	Sine wave 10ms	40	A
Operating junction temperature	T_j		-40 to +150	°C
Storage temperature	T_{stg}		-40 to +150	°C


• Electrical Characteristics ($T_a=25^\circ C$ Unless otherwise specified)

Item	Symbol	Conditions	Max.	Unit
Forward voltage Drop	V_F	$I_F=5.0A$	1.2	V
Reverse current	I_R	$V_R=V_{RRM}$	100	μA
Reverse recovery time	trr	$I_F=0.1A, I_R=0.2A, I_{rec}=0.05A$	35	ns
Thermal resistance	$R_{th(j-c)}$	Junction to case	3.5	°C/W

• Mechanical Characteristics

Mounting torque	Recommended torque	0.3 to 0.5	N · m
Weight		2.3	g

■ Outline Drawings

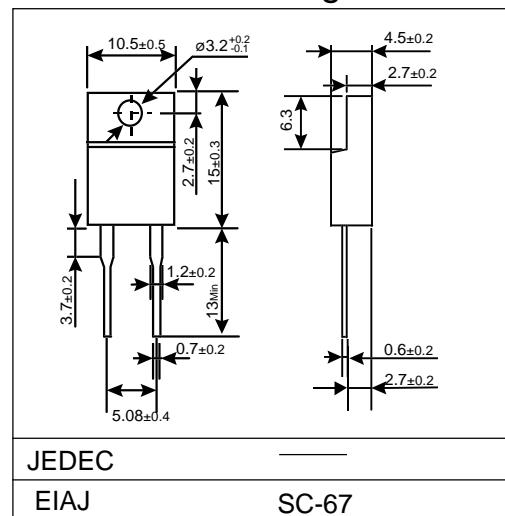

■ Connection Diagram



■ Characteristics

