


# OTHER





**P-Lock Connector  
Housing**

**YRH250**

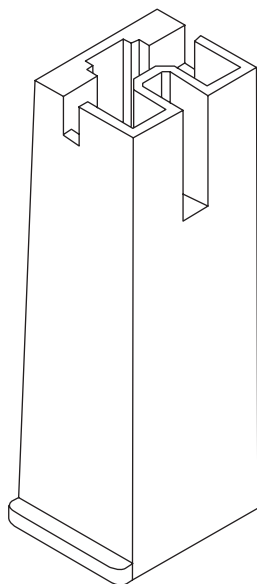

## Material

I/NO	DESCRIPTION	TITLE	MATERIAL
1	HOUSING	YRH250	PA66, UL94 V Grade

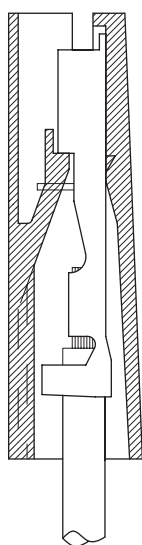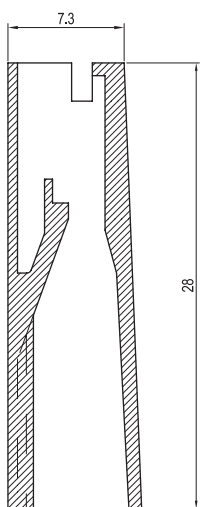

TERMINAL ASSEMBLY DRAWING

AWG: #14~#18

## Specification

ITEM	SPEC
Voltage Rating	AC/DC 250V
Current Rating	AC/DC 3A
Operating Temperature	-25℃~+85℃
Contact Resistance	-
Withstanding Voltage	-
Insulation Resistance	-
Applicable Wire	-
Applicable P.C.B	-
Applicable FPC/FFC	-
Solder Height	-
Crimp Tensile Strength	-
UL FILE NO	-

Application Terminal : YRT250/205