

# YG902C2R

(200V / 10A TO-220F15)

## LOW LOSS SUPER HIGH SPEED DIODE


### ■ Features

- Low VF
- Super high speed switching.
- High reliability by planer design.


### ■ Applications

High speed power switching

### ■ Outline Drawings

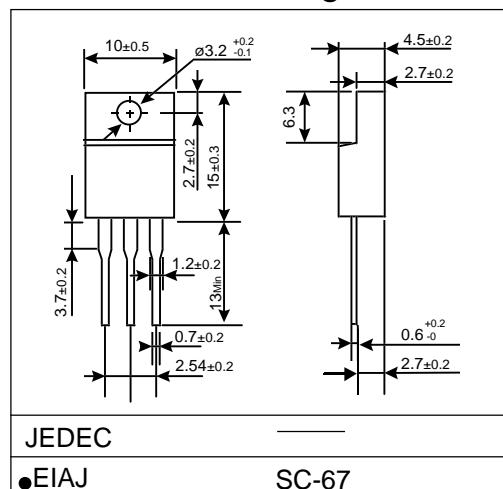

### ■ Connection Diagram

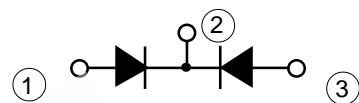

### ■ Maximum Ratings and Characteristics

- Absolute Maximum Ratings

Item	Symbol	Conditions	Rating	Unit
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>		200	V
Repetitive Peak Surge Reverse Voltage	V <sub>RSM</sub>		200	V
Isolation Voltage	V <sub>iso</sub>	Terminals to Case, AC. 1min.	1500	V
Average Output Current	I <sub>O</sub>	duty=1/2, T <sub>c</sub> =115°C Square wave	10*	A
Surge Current	I <sub>FSM</sub>	Sine wave 10ms	50	A
Operating Junction Temperature	T <sub>j</sub>		-40 to +150	°C
Storage Temperature	T <sub>stg</sub>		-40 to +150	°C

\* Out put current of centertap full wave connection.

- Electrical Characteristics (Ta=25°C Unless otherwise specified )

Item	Symbol	Conditions	Max.	Unit
Forward Voltage Drop **	V <sub>F</sub>	I <sub>F</sub> =5A	0.95	V
Reverse Current **	I <sub>R</sub>	V <sub>R</sub> =V <sub>RRM</sub>	100	μA
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =0.1A,I <sub>R</sub> =0.2A,I <sub>rec</sub> =0.05A	35	ns
Thermal Resistance	R <sub>th(j-c)</sub>	Junction to case	3.5	°C/W

\*\* Rating per element

- Mechanical Characteristics

Mounting torque	Recommended torque	0.3 to 0.5	N · m
Weight		2.3	g

## ■ Characteristics

