

PRECISION 3.3 VOLT LOW KNEE CURRENT VOLTAGE REFERENCE

ISSUE 2 - FEBRUARY 1997

ZRC330

DEVICE DESCRIPTION

The ZRC330 uses a bandgap circuit design to achieve a precision micropower voltage reference of 3.3 volts. The device is available in small outline surface mount packages, ideal for applications where space saving is important.

The ZRC330 design provides a stable voltage without an external capacitor and is stable with capacitive loads. The ZRC330 is recommended for operation between 20 μ A and 5mA and so is ideally suited to low power and battery powered applications.

Excellent performance is maintained to a suggested absolute maximum of 25mA, however the rugged design and 20 volt processing allows the reference to withstand transient effects and currents up to 200mA. Superior switching capability allows the device to reach stable operating conditions in only a few microseconds.

- No stabilising capacitor required
- Low knee current, 15 μ A typical
- Typical slope resistance 0.6 Ω
- \pm 3%, 2% and 1% tolerance
- Industrial temperature range
- Operating current 20 μ A to 5mA


APPLICATIONS

- Battery powered and portable equipment.
- Metering and measurement systems.
- Instrumentation.
- Test equipment.
- Data acquisition systems.
- Precision power supplies.
- Crystal oscillators

FEATURES

- Small outline SOT23, SO8 and TO92 style packages

SCHEMATIC DIAGRAM

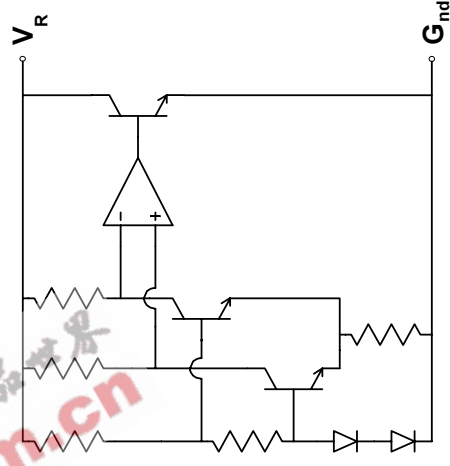

ZRC330

ZRC330

ABSOLUTE MAXIMUM RATING

Reverse Current 25mA
 Forward Current 25mA
 Operating Temperature -40 to 85°C
 Storage Temperature -55 to 125°C

Power Dissipation (T_{amb}=25°C)
 SOT23 330mW
 E-Line, 3 pin (TO92) 500mW
 E-Line, 2 pin (TO92) 500mW
 SO8 625mW


ELECTRICAL CHARACTERISTICS

TEST CONDITIONS (Unless otherwise stated) T_{amb}=25°C



SYMBOL	PARAMETER	CONDITIONS	LIMITS			TOL.%	UNITS
			MIN	TYP	MAX		
V _R	Reverse Breakdown Voltage	I _R =150µA	3.27 3.234 3.2	3.3 3.3 3.3	3.33 3.366 3.4	1 2 3	V
I _{MIN}	Minimum Operating Current			15	20		µA
I _R	Recommended Operating Current		0.02		5		mA
T _C †	Average Reverse Breakdown Voltage Temp. Co.	I _R (min) to I _R (max)		15	50		ppm/°C
R _S §	Slope Resistance			0.6	2		Ω
Z _R	Reverse Dynamic Impedance	I _R = 1mA f = 100Hz I _{AC} = 0.1 I _R		0.5	1.2		Ω
E _N	Wideband Noise Voltage	I _R = 150µA f = 10Hz to 10KHz		43			µV(rms)

$$† T_C = \frac{V_R \text{ Change} \times 1000000}{V_R \times \text{Temperature Change}}$$

$$§ R_S = \frac{V_R \text{ Change} (I_R \text{ (min) to } I_R \text{ (max)})}{I_R \text{ (max)} - I_R \text{ (min)}}$$


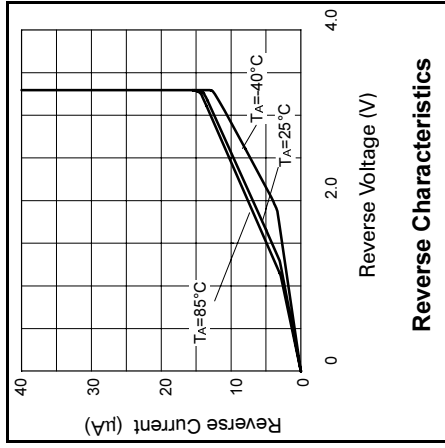


TYPICAL CHARACTERISTICS

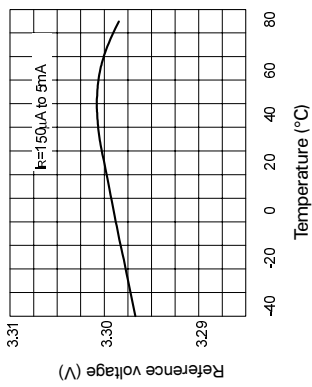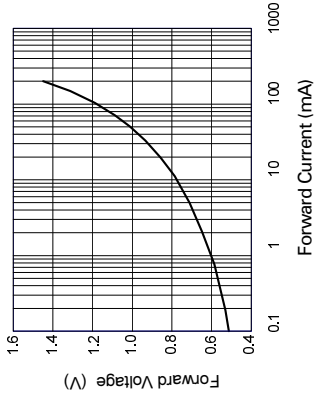



Forward Characteristics

Temperature Drift

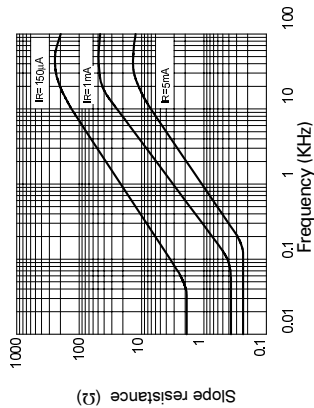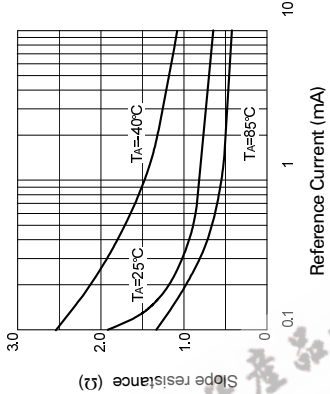

Slope Resistance v Current

Slope Resistance v Frequency

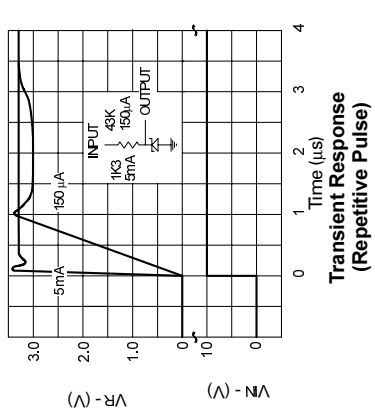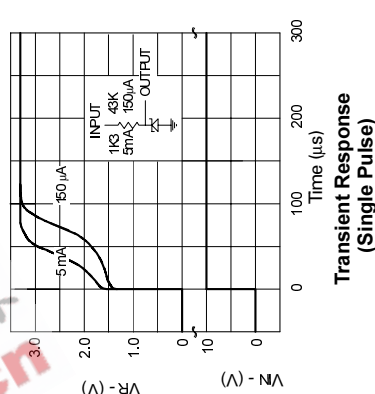

Transient Response (Single Pulse)

Transient Response (Repetitive Pulse)

Reverse Characteristics

ZRC330

ZRC330

ABSOLUTE MAXIMUM RATING

Reverse Current 25mA
 Forward Current 25mA
 Operating Temperature -40 to 85°C
 Storage Temperature -55 to 125°C

Power Dissipation (T_{amb}=25°C)
 SOT23 330mW
 E-Line, 3 pin (TO92) 500mW
 E-Line, 2 pin (TO92) 500mW
 SO8 625mW


ELECTRICAL CHARACTERISTICS

TEST CONDITIONS (Unless otherwise stated) T_{amb}=25°C



SYMBOL	PARAMETER	CONDITIONS	LIMITS			TOL. %	UNITS
			MIN	TYP	MAX		
V _R	Reverse Breakdown Voltage	I _R =150µA	3.27 3.234 3.2	3.3 3.3 3.3	3.33 3.366 3.4	1 2 3	V
I _{MIN}	Minimum Operating Current			15	20		µA
I _R	Recommended Operating Current		0.02		5		mA
T _C †	Average Reverse Breakdown Voltage Temp. Co.	I _R (min) to I _R (max)		15	50		ppm/°C
R _S §	Slope Resistance			0.6	2		Ω
Z _R	Reverse Dynamic Impedance	I _R = 1mA f = 100Hz I _{AC} = 0.1 I _R		0.5	1.2		Ω
E _N	Wideband Noise Voltage	I _R = 150µA f = 10Hz to 10kHz		43			µV(rms)

$$† T_C = \frac{V_R \text{ Change} \times 1000000}{V_R \times \text{Temperature Change}}$$

$$§ R_S = \frac{V_R \text{ Change} (I_R \text{ (min) to } I_R \text{ (max)})}{I_R \text{ (max)} - I_R \text{ (min)}}$$


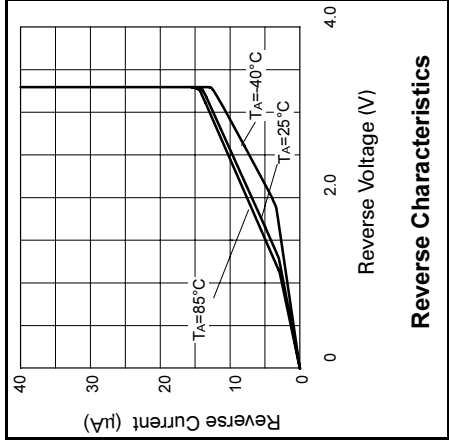


TYPICAL CHARACTERISTICS

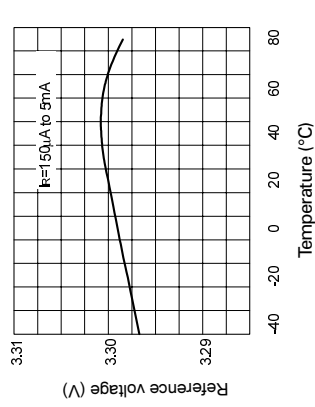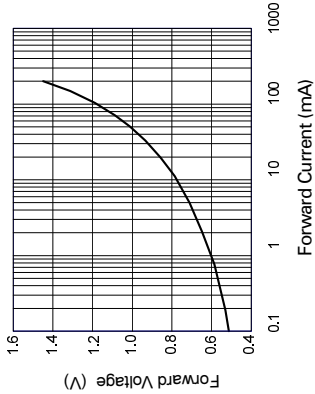



Forward Characteristics

Temperature Drift

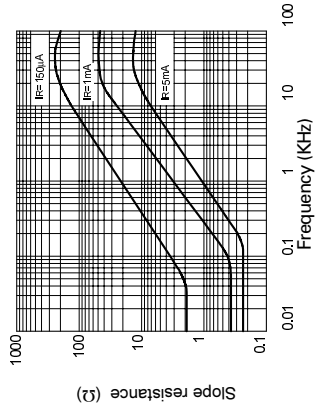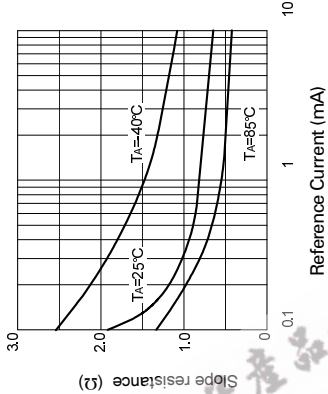

Slope Resistance v Current

Slope Resistance v Frequency

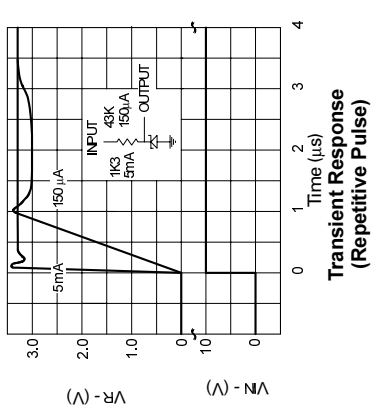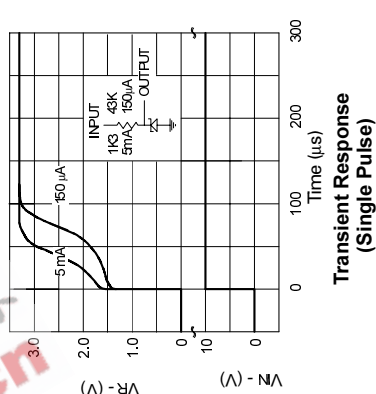

Transient Response (Single Pulse)

Transient Response (Repetitive Pulse)


Reverse Characteristics

ZRC330

ZRC330


CONNECTION DIAGRAMS

E-Line, 2 pin Package Suffix – Y




Bottom View

E-Line, 3 pin, Rev Package Suffix – R




Bottom View –
Pin 3 floating or connected to pin 1

E-Line, 3 pin Package Suffix – A



Bottom View –
Pin 1 floating or connected to pin 3

SOT23 Package Suffix – F



Top View –
Pin 1 floating or connected to pin 2

Part No	Tol%	Package	Partmark
ZRC330A03	3	E-Line •	ZRC33003
ZRC330A02	2	E-Line •	ZRC33002
ZRC330A01	1	E-Line •	ZRC33001
ZRC330F03	3	SOT23	33A
ZRC330F02	2	SOT23	33B
ZRC330F01	1	SOT23	33C
ZRC330N803	3	SO8	ZRC33003
ZRC330N802	2	SO8	ZRC33002
ZRC330N801	1	SO8	ZRC33001

ORDERING INFORMATION

Part No	Tol%	Package	Partmark
ZRC330R03	3	E-Line *	ZRC330R3
ZRC330R02	2	E-Line *	ZRC330R2
ZRC330R01	1	E-Line *	ZRC330R1
ZRC330Y03	3	E-Line †	ZRC33003
ZRC330Y02	2	E-Line †	ZRC33002
ZRC330Y01	1	E-Line †	ZRC33001

* E-Line 3 pin Reversed
 † E-Line 2 pin
 • E-Line 3 pin




ZRC330

ZRC330


CONNECTION DIAGRAMS

E-Line, 2 pin Package Suffix – Y




Bottom View

E-Line, 3 pin, Rev Package Suffix – R




Bottom View –
Pin 3 floating or connected to pin 1

E-Line, 3 pin Package Suffix – A



Bottom View –
Pin 1 floating or connected to pin 3

SOT23 Package Suffix – F



Top View –
Pin 1 floating or connected to pin 2

Part No	Tol%	Package	Partmark
ZRC330A03	3	E-Line •	ZRC33003
ZRC330A02	2	E-Line •	ZRC33002
ZRC330A01	1	E-Line •	ZRC33001
ZRC330F03	3	SOT23	33A
ZRC330F02	2	SOT23	33B
ZRC330F01	1	SOT23	33C
ZRC330N803	3	SO8	ZRC33003
ZRC330N802	2	SO8	ZRC33002
ZRC330N801	1	SO8	ZRC33001

ORDERING INFORMATION

Part No	Tol%	Package	Partmark
ZRC330R03	3	E-Line *	ZRC330R3
ZRC330R02	2	E-Line *	ZRC330R2
ZRC330R01	1	E-Line *	ZRC330R1
ZRC330Y03	3	E-Line †	ZRC33003
ZRC330Y02	2	E-Line †	ZRC33002
ZRC330Y01	1	E-Line †	ZRC33001

* E-Line 3 pin Reversed
 † E-Line 2 pin
 • E-Line 3 pin

