



0989 SERIES


The 0989 filters are excellent for suppressing noise from switching power supplies and other devices where a considerable amount of common mode and differential mode electrical noise is present.

This series is available with either 6.3mm terminals or with an IEC inlet connector

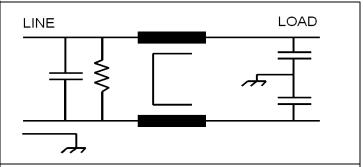

Operating Voltage = 115/250VAC
Operating Current = 3,6,8 & 10 amperes
Operating Frequency = 50/60 Hz
Operating Temperature = -10 to 50 deg. C
Dielectric Withstanding (Line-Ground) =
1500 VDC for 1 minute
Dielectric Withstanding (Line to Line) =
1500 VDC for 1 minutes
Leakage Current = 1.0 mA @ 250 VAC, 50Hz
Residual Voltage (Max after 5 sec.) = 10 Volts
Agency Approvals -8 UL, CSA, VDE



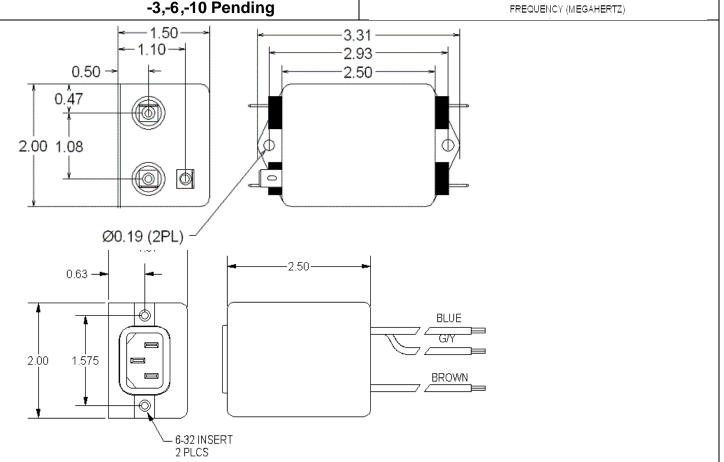

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115 email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884