

# Bandpass Filter

KR Series 2305-2


Overall Amplitude

Overall Amplitude

## Specifications

KR Part Number	2305-2
Filter Type	Bandpass
Center Frequency	69.9 MHz
Insertion Loss	< 6 dB
54.9 MHz	> 60 dB
68.9 MHz	< 1 dB
69.9 MHz	Ref
70.9 MHz	< 1 dB
84.9 MHz	> 60 dB
Impedance	75 $\Omega$

## Outline Drawing

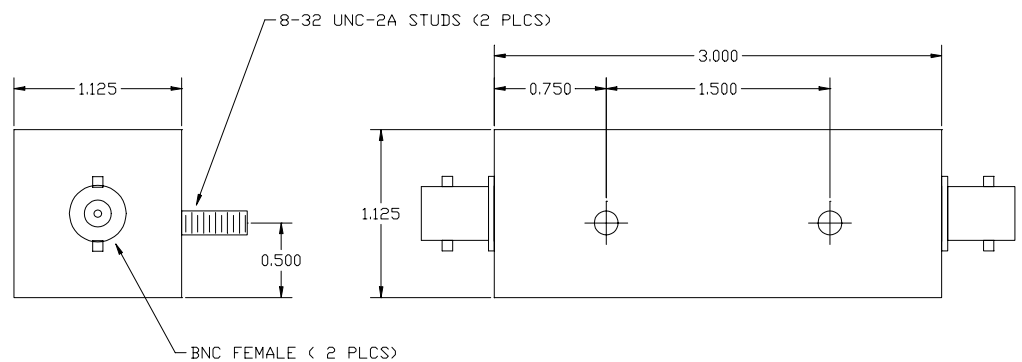

**KR Electronics**  
91 Avenel Street  
Avenel, NJ 07001

Phone: (732) 636-1900  
Fax: (732) 636-1982