



# 800 / 900 MHz Band Chip Multilayer Coupler

Model No. FSTH-90S-[ ]

## Equivalent Circuits

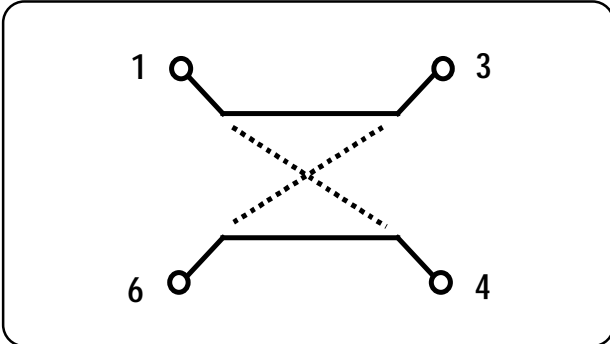

## Shape & Size

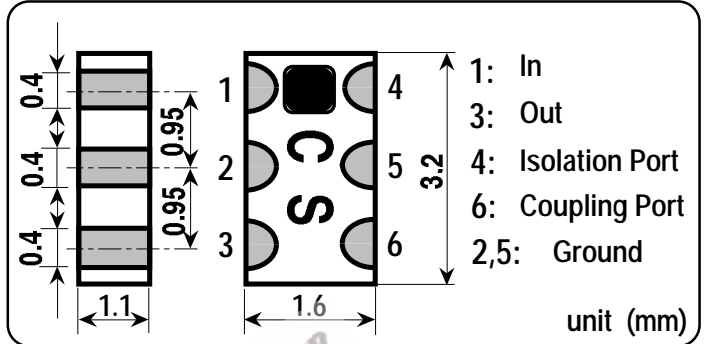

## Specifications

P/N	Frequency Range [MHz]	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
FSTH-90S-A	800-850	15.0+/-1dB	0.5dB Max.	25dB Min.	17.7dB Min.	5W Max.	-35 ~ +85 deg.C
FSTH-90S-G	869-915	14.5+/-1dB	(0.3dB Typ.)	(30dB Typ.)	(20.8dB Typ.)		
FSTH-90S-P	925-960	14.0+/-1dB					

## Typical Data

