


## KBP201 THRU KBP207

CURRENT 2.0 Amperes  
VOLTAGE 50 to 1000 Volts

### Features

- Glass Passivated Die Construction
- High Case Dielectric Strength of 1500V<sub>RMS</sub>
- Low Reverse Leakage Current
- Surge Overload Rating to 65A Peak
- Ideal for Printed Circuit Board Applications
- Plastic Material - UL Flammability Classification 94V-0

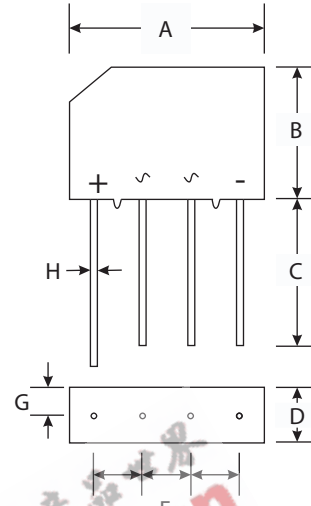

KBP		
Dim	Min	Max
A	14.00	15.00
B	10.50	11.50
C	15.00	—
D	4.70	5.00
E	3.50	4.00
G	2.30	2.50
H	0.70 Typical	
All Dimensions in mm		

### Mechanical Data

- Case : Molded Plastic
- Terminals : Plated Leads, Solderable per MIL-STD-202, Method 208
- Polarity : As Marked on Body
- Approx. Weight : 1.52 grams
- Mounting Position : Any
- Marking : Type Number

### Maximum Ratings And Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	KBP 201	KBP 202	KBP 203	KBP 204	KBP 205	KBP 206	KBP 207	Units
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V <sub>RMM</sub> V <sub>RWM</sub> V <sub>R</sub>	50	100	200	400	600	800	1000	Volts
RMS Reverse Voltage	V <sub>R(RMS)</sub>	35	70	140	280	420	560	700	Volts
Average Rectified Output Current @ T <sub>C</sub> =105°C	I <sub>o</sub>	2.0							Amps
Non-Repetitive Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load per element (JEDEC method)	I <sub>FSM</sub>	65							Amps
Forward Voltage (per element) @ I <sub>F</sub> =2.0 A	V <sub>FM</sub>	1.1							Volts
Peak Reverse Current at Rated DC Blocking Voltage	@ T <sub>C</sub> =25°C	5.0							μ A
	@ T <sub>C</sub> =125°C	500							
Typical Junction Capacitance per Element (Note 2)	C <sub>j</sub>	25							pF
Typical Thermal Resistance (Note 1)	R <sub>θ JC</sub>	38							°C/W
Operating and Storage Temperature Range	T <sub>j</sub> T <sub>STG</sub>	-65 to +150							°C

#### Notes:

- (1) Thermal resistance from junction to case per element. Unit mounted on 75 x 75 x 16mm aluminum plate heat sink.
- (2) Measured at 1.0MHz and Applied Reverse Voltage of 4.0V DC.

## RATING AND CHARACTERISTIC CURVES KBP201 THRU KBP207

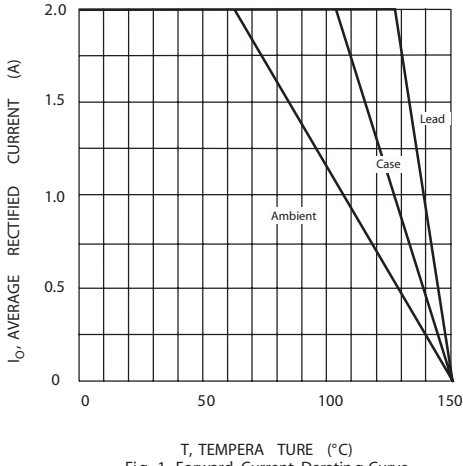


Fig. 1 Forward Current Derating Curve

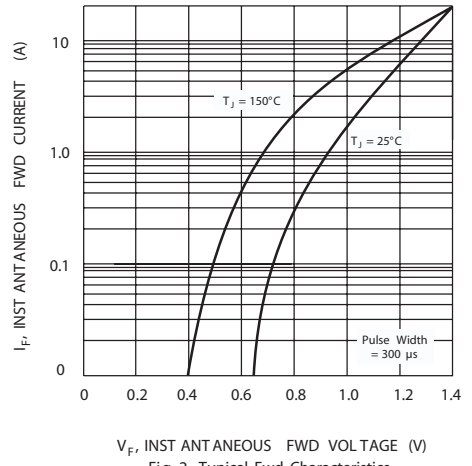


Fig. 2 Typical Fwd Characteristics

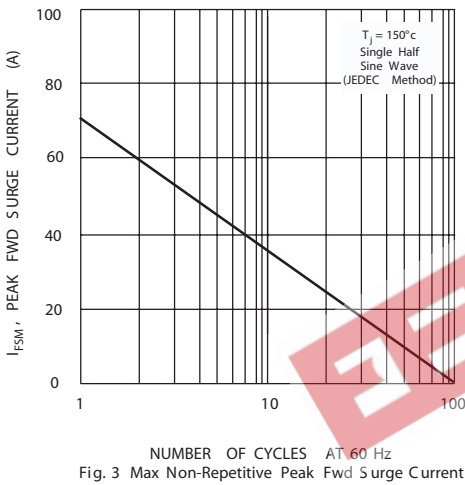


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

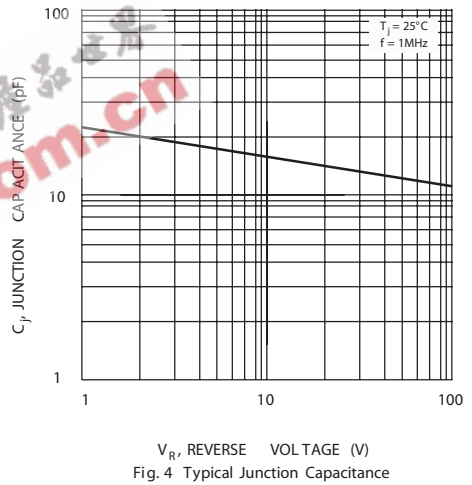


Fig. 4 Typical Junction Capacitance

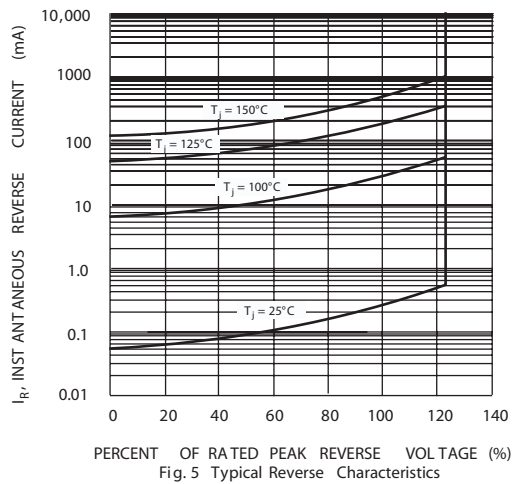


Fig. 5 Typical Reverse Characteristics