



DATA SHEET

SB1020FCT~SB10100FCT

ISOLATION SCHOTTKY BARRIER RECTIFIERS

VOLTAGE- 20 to 100 Volts CURRENT - 10.0 Ampere

ITO-220AB

Unit: inch (mm)

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O. Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- For use in low voltage, high frequency inverters free wheeling , and polarity protection applications.

MECHANICAL DATA


Case: ITO-220AB Molded plastic

Terminals: Solder plated, solderable per MIL-STD-202, Method 208

Polarity: As marked.

Standard packaging: Any

Weight: 0.08 ounces, 2.24grams.

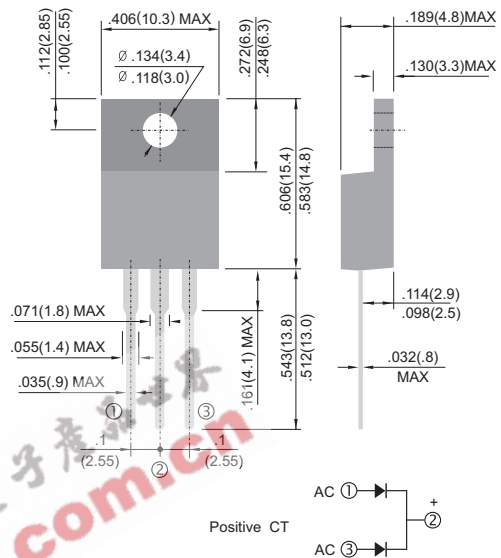

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

	SB1020FCT	SB1030FCT	SB1040FCT	SB1050FCT	SB1060FCT	SB1080FCT	SB10100FCT	UNIT
Maximum Recurrent Peak Reverse Voltage	20.0	30.0	40.0	50.0	60.0	80.0	100.0	V
Maximum RMS Voltage	14.0	21.0	28.0	35.0	42.0	56.0	70.0	V
Maximum DC Blocking Voltage	20.0	30.0	40.0	50.0	60.0	80.0	100.0	V
Maximum Average Forward Rectified Current at Tc=90°C	10							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	150							A
Maximum Instantaneous Forward Voltage at 5.0A per element	0.55		0.75		0.85			v
Maximum DC Reverse Current (Note 1) Ta=25°C at Rated DC Blocking Voltage Ta=100°C				0.5	50			mA
Typical Thermal Resistance Note RθJA	60							°C/W
Operating and Storage Temperature Range T _J	-50 to +125							°C

NOTES:

1. Thermal Resistance Junction to Ambient .



RATING AND CHARACTERISTIC CURVES

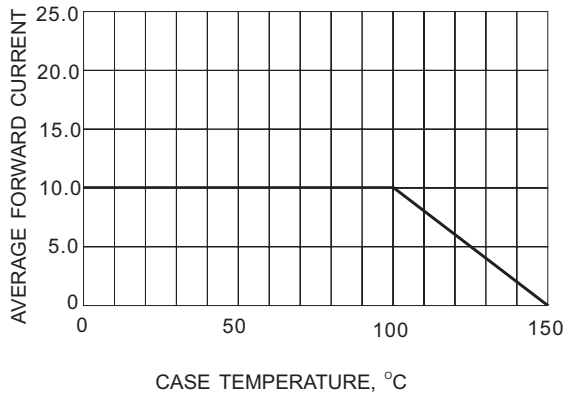


Fig.1- FORWARD CURRENT DERATING CURVE

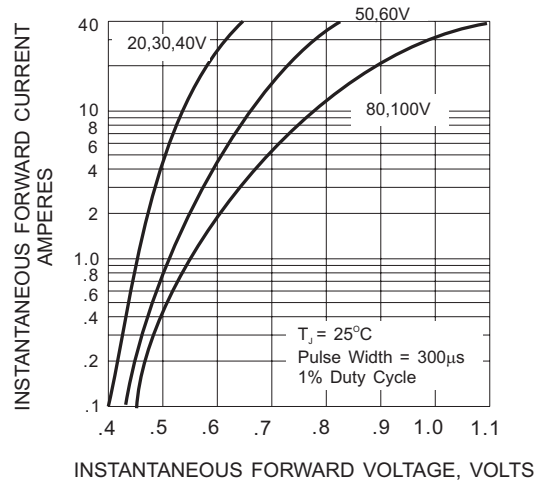


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

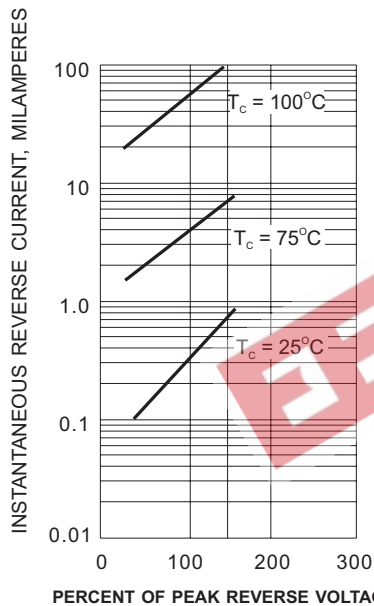


Fig.3- TYPICAL REVERSE CHARACTERISTIC

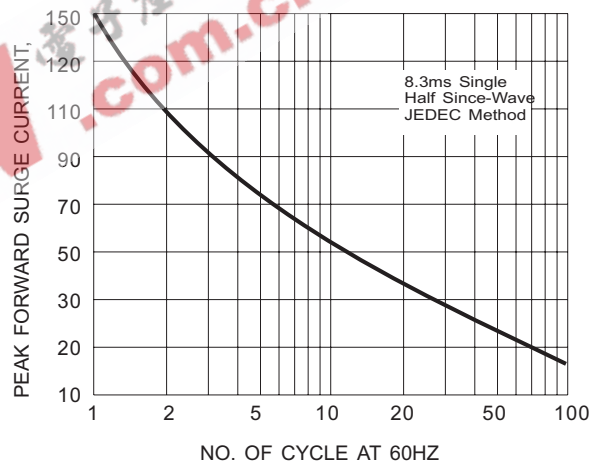


Fig.4- MAXIMUM NON-REPETITIVE SURGE CURRENT

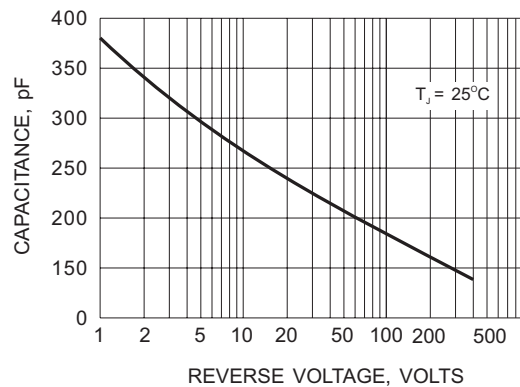


Fig.5- TYPICAL JUNCTION CAPACITANCE