





SURFACE MOUNT COMMON MODE CHOKES

Suited for LAN and Telecom Applications



-  Reduces radiated EMI emissions
-  Filters common mode noise for EMI reduction
-  Common mode attenuation from 100 kHz to 1 GHz
-  Tape & Reel packaging available for surface mount parts*

Electrical Specifications @ 25°C


Part Number	No. of Lines	Primary Inductance OCL (μH MIN)	Common Mode Attenuation (dB TYP)								DCR (Ω MAX)	Page Number of Mech. & Schem.	
			100 KHz	1 MHz	10 MHz	30 MHz	50 MHz	100 MHz	300 MHz	500 MHz			1 GHz
PE-68624	2	47	11	27	40	44	42	36	26	17	—	0.40	2
PE-65855	2	4700	41	43	49	39	34	26	20	12	—	1.0	4
B2013	2	6300	46	47	43	32	25	29	21	14	16	1.0	3
B4003	2	4700	42	41	48	38	33	21	22	23	17	1.0	6
R0003	3	20	6	14	27	30	30	30	30	28	25	0.40	2
23Z875SM	3	69	9	24	31	30	29	27	21	16	—	0.20	4
PE-65857	4	22.5	7	20	30	37	38	34	24	13	—	0.22	4
PE-68627	4	24	8	21	32	36	37	36	30	20	—	0.25	4
T8003	4	33	9	13	32	32	30	27	16	17	13	0.20	6
23Z4000SMD	4	36	7	23	35	38	38	36	29	24	—	0.50	5
PE-65738	4	37	8	21	28	28	28	27	25	22	—	0.30	3
PE-65854	4	47	3	19	32	36	35	29	12	6	—	0.40	3
23Z104SM	4	68	8	22	28	28	27	25	20	15	—	0.20	5
PE-67540	4	100	14	33	44	48	49	44	34	29	20	0.60	4
PE-65853	4	4700	40	51	38	30	25	20	14	13	—	1.20	3
PE-68602	6	21	6	19	28	34	35	36	34	29	1	0.35	3
23Z106SM	6	68	8	22	29	30	30	29	24	19	—	0.20	5
PE-69011	8	36	8	24	36	39	35	29	18	11	—	0.35	3
23Z105SM	8	68	8	24	30	29	27	24	16	11	—	0.20	5
23Z109SM	10	7.5	4	9	20	25	26	24	16	11	—	0.20	5
T8008	16	47	7	27	40	44	42	36	26	—	—	0.40	6

* When ordering Tape & Reel packaging, add a "T" at the end of the part number (i.e. PE-65738T or 23Z106SMT).

NOTE: Additional common mode chokes are available. Please contact Applications Engineering.

Mechanicals

PE-68624, R0003

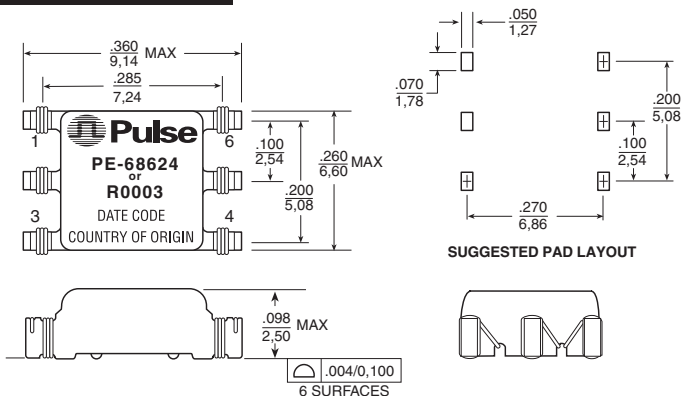

Schematics

R0003



Connect unused pin to logic ground for optimum performance.

PE-68624



SURFACE MOUNT COMMON MODE CHOKES


Suited for LAN and Telecom Applications



Mechanicals


Schematics

PE-65738, PE-68602, PE-69011

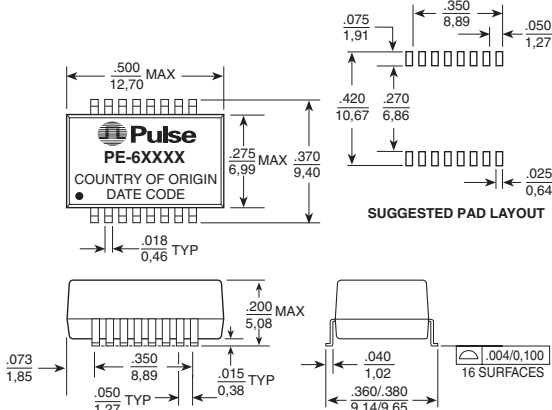


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$


Weight0.83 grams
Tape & Reel900/reel
Tube40/tube

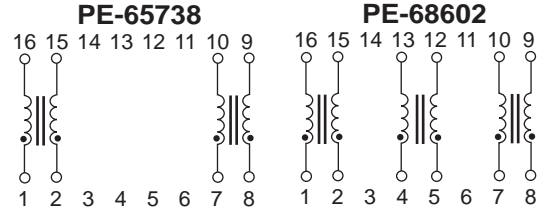

PE-69011

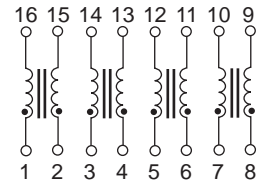


PE-65853

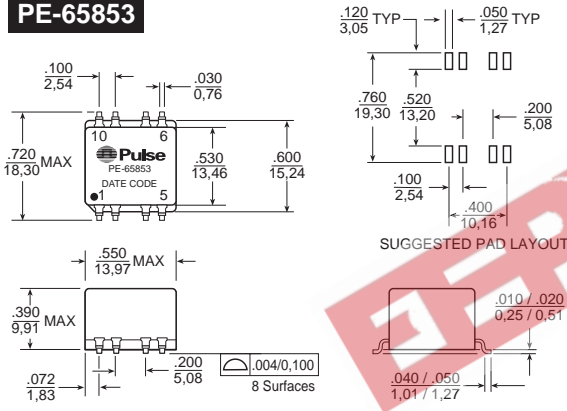


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight4.0 grams
Tape & Reel150/reel
Tube35/tube

PE-65853



B2013

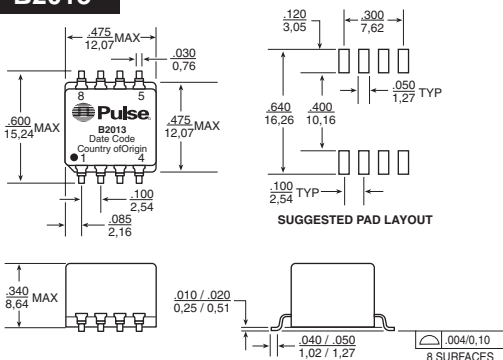


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight9.5 grams
Tray30/tray

B2013




PE-65854

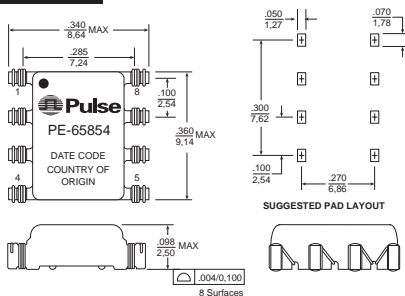

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight0.3 grams
Tape & Reel1500/reel
Tube60/tube

PE-65854



SURFACE MOUNT COMMON MODE CHOKES


Suited for LAN and Telecom Applications



Mechanicals

Schematics

PE-65855

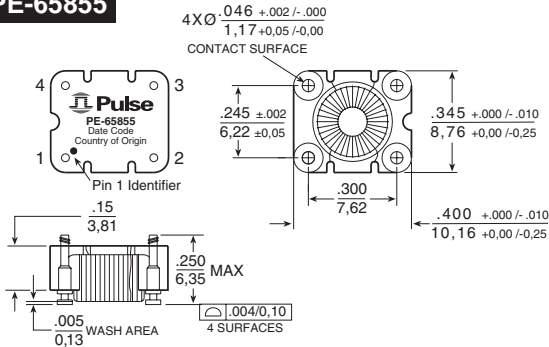


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0.25}$

Weight0.69 grams
Tape & Reel800/reel
Tube40 /tube

PE-65855



PE-65857, PE-67540


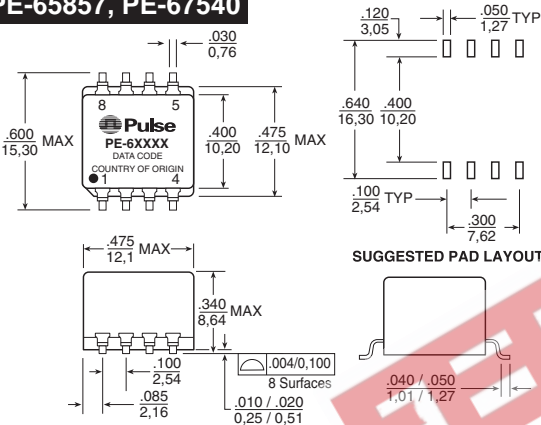


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0.25}$


Weight2.0 grams
Tape & Reel250/reel
Tube40/tube

PE-65857

PE-67540




PE-68627

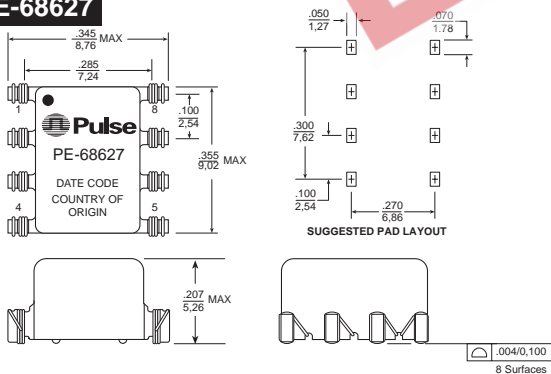


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0.25}$

Weight0.3 grams
Tape & Reel1500/reel
Tube55/tube

PE-68627




23Z87SM

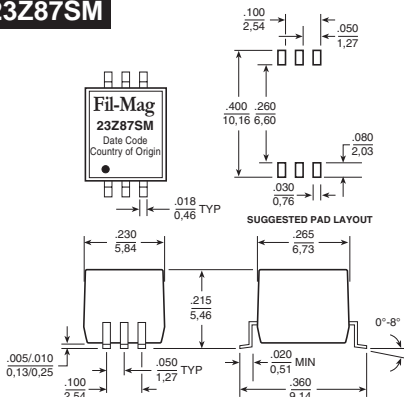

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0.13}$

Weight0.5 grams
Tape & Reel750/reel
Tube100/tube

23Z87SM



SURFACE MOUNT COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics


T8003

T8003

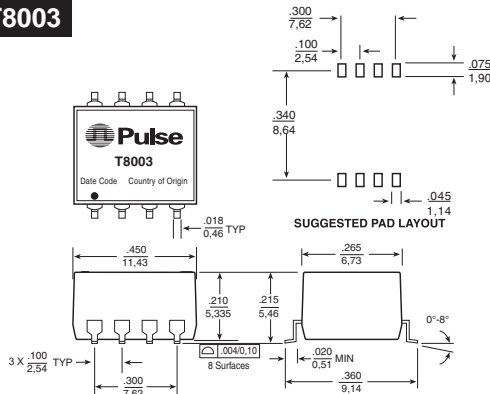


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm .005$
 $0,13$

Weight0.84 grams
Tape & Reel750/reel
Tube100/tube




T8055

T8055

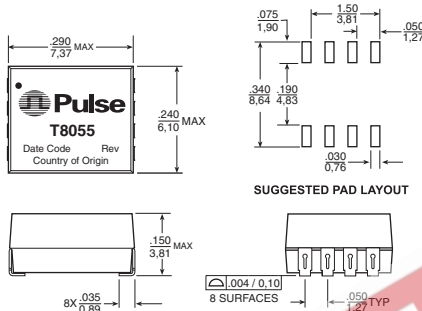


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm .010$
 $0,25$

Weight0.2 grams
Tape & Reel1750/reel
Tube80/tube




B4003

B4003

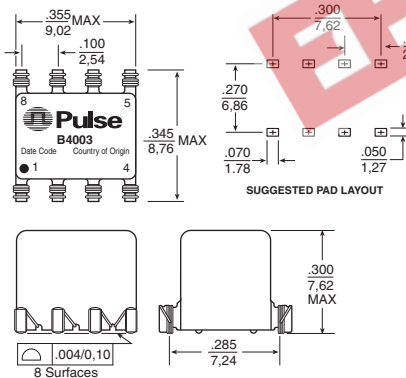


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm .010$
 $0,25$

Weight1.0 grams
Tape & Reel425/reel
Tube50/tube




T8008

T8008

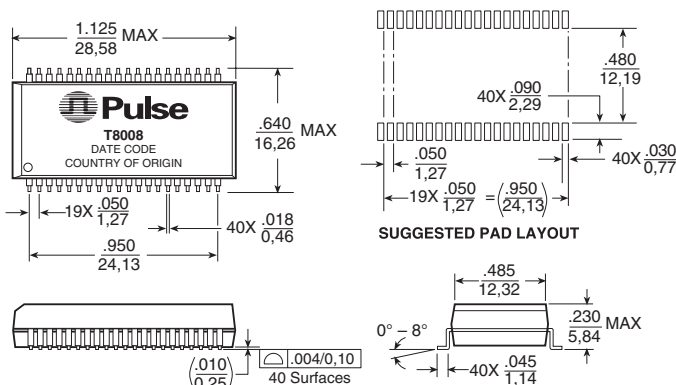

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm .010$
 $0,25$


Weight4.0 grams
Tape & Reel250/reel
Tube15/tube

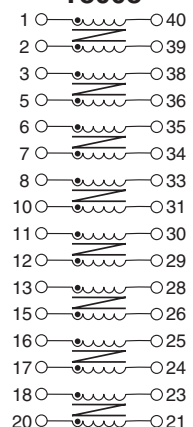

NOTE: The common mode test circuit for surface mount is the same as for through hole and is on the back page.

THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications

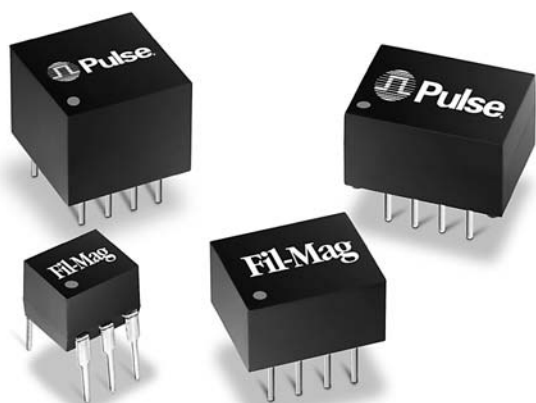

- Ⓢ Reduces radiated EMI emissions
- Ⓢ Filters common mode noise for EMI reduction
- Ⓢ Common mode attenuation from 100 KHz to 1 GHz
- Ⓢ Tube packaging available for through hole parts

Electrical Specifications @ 25°C

Part Number	No. of Lines	Primary Inductance OCL (μH MIN)	Common Mode Attenuation (dB TYP)										DCR (Ω MAX)	Page Number of Mech. & Schem.
			100 KHz	1 MHz	10 MHz	30 MHz	50 MHz	100 MHz	300 MHz	500 MHz	1 GHz			
PE-65944	2	24	1	14	28	32	33	28	13	5	—	0.30	9	
23Z107	2	68	8	25	33	32	30	27	18	12	—	0.20	11	
PE-67531	2	140	14	34	45	49	50	47	38	32	25	0.60	9	
B2005	2	9000	47	47	41	30	22	33	21	15	15	1.0	10	
23Z87	3	69	8	22	29	29	28	26	20	15	—	0.20	10	
PE-65554	4	24	—	21	32	38	39	34	24	13	—	0.30	8	
42Z4000	4	36	8	24	37	40	40	38	30	24	—	0.20	11	
PE-67501	4	50	14	34	45	49	50	47	20	15	10	0.30	9	
PE-68002	4	68	7	24	37	41	42	40	31	27	—	0.35	9	
23Z104	4	85	8	23	29	29	28	25	17	11	—	0.20	10	
PE-67539	4	140	14	33	44	48	48	43	33	28	19	0.60	9	
PE-65542	4	1000	28	41	42	32	22	—	—	—	—	0.70	8	
PT5039	4	3600	42	43	42	32	27	17	15	9	13	0.50	8	
J0010D11	4	—	9	13	32	35	35	29	13	24	19	0.50	12	
PE-65950	4	4700±30%	40	51	37	28	23	20	—	—	—	1.00	8	
PE-65541	4	6000	44	54	33	32	29	—	—	—	—	1.40	8	
PE-68613	4	3290	40	51	37	28	23	20	—	—	—	1.00	11	
PE-64683	6	25	6	18	32	38	37	32	21	17	—	0.35	8	
23Z106	6	85	8	23	30	29	28	27	21	15	—	0.20	10	

THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics


PE-64683

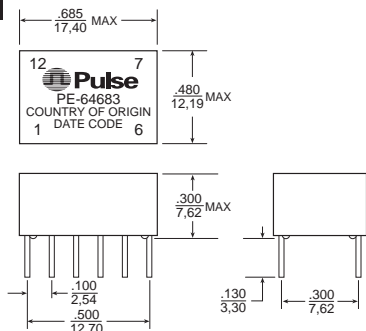


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight0.27 grams
Tube30/tube

PE-64683




PE-65541, PE-65542, PE-65950

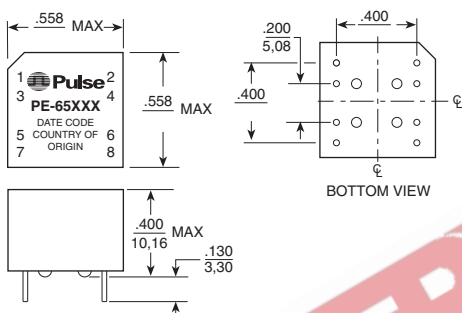


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight0.38 grams
Tube35/tube

PE-65541 PE-65542 PE-65950




PE-65554

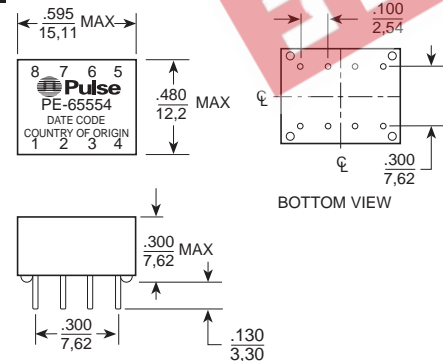


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight2.5 grams
Tube35/tube

PE-65554




PT5039

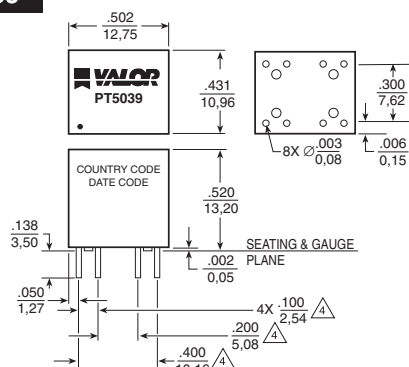

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight2.5 grams
Tube35/tube

PT5039



THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics

PE-65944

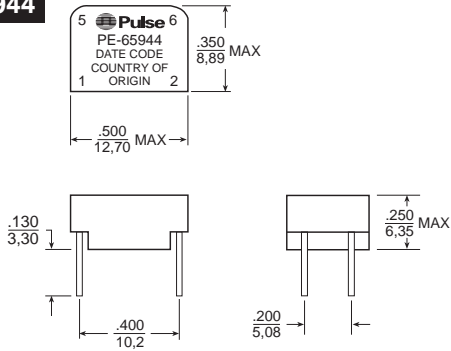


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

PE-65944




Weight1.07 grams
Tube30/tube

PE-67501, PE-67539

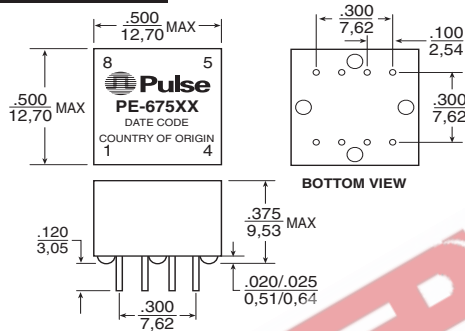


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

PE-67501 PE-67539



Weight2.4 grams
Tube40/tube

PE-67531

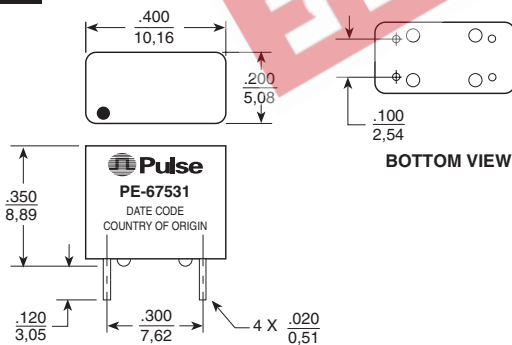


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

PE-67531




Weight0.76 grams
Tube40/tube

PE-68002

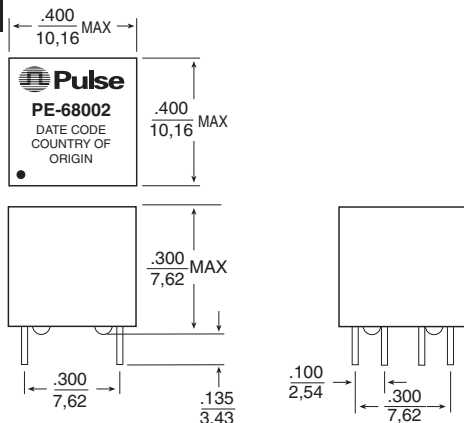

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

PE-68002



Weight1.4 grams
Tube50/tube

THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Pulse
A TECHNITROL COMPANY

Mechanicals

Schematics

B2005

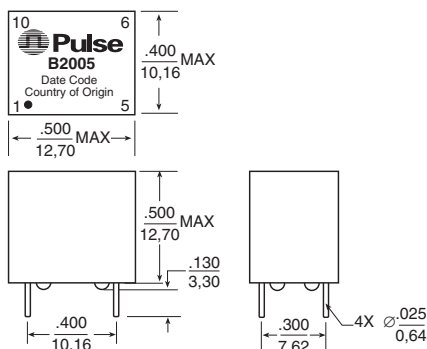


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm .005$
0,13

Weight3.7 grams
Tube40/tube



23Z87

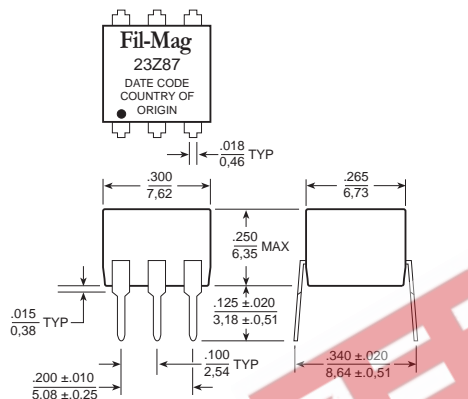


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm .005$
0,13

Weight0.7 grams
Tube76/tube

23Z87




23Z104

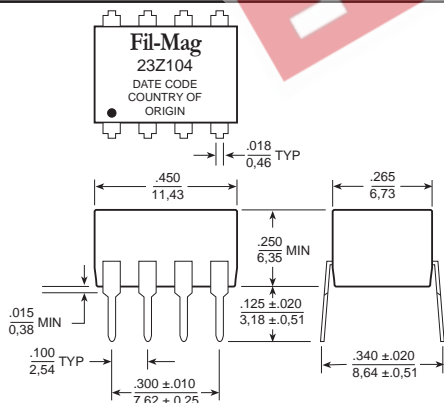


Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm .005$
0,13

Weight1.0 grams
Tube50/tube

23Z104




23Z106

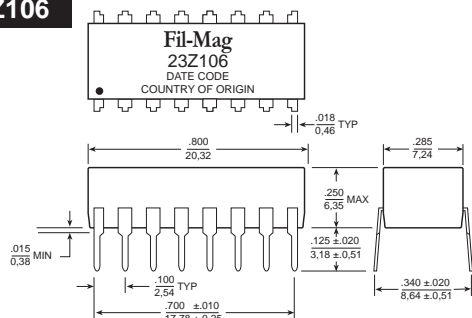

Dimensions: Inches
mm
Unless otherwise specified,
all tolerances are $\pm .005$
0,13

Weight1.9 grams
Tube28/tube

23Z106



THROUGH HOLE COMMON MODE CHOKES


Suited for LAN and Telecom Applications



Mechanicals

Schematics

23Z107




Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0,13}$

Weight0.45 grams
Tube100/tube

23Z107




42Z4000

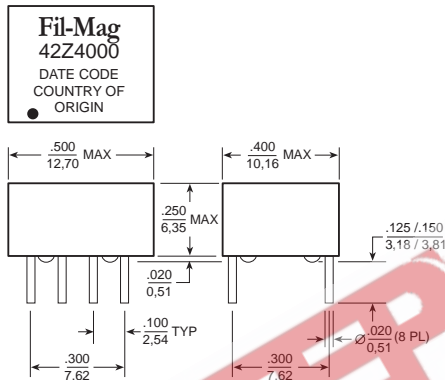


Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

Weight1.5 grams
Tube47/tube

42Z4000




PE-68613

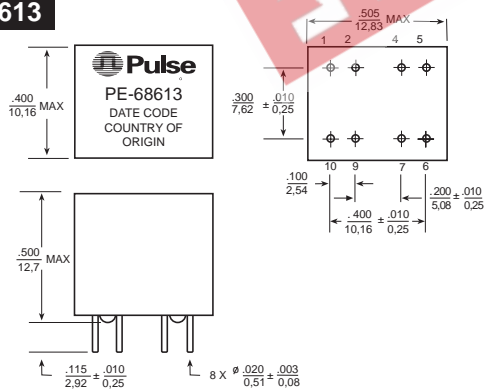

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified,
all tolerances are $\pm \frac{.005}{0,127}$

Weight3.5 grams
Tube40/tube

PE-68613




THROUGH HOLE COMMON MODE CHOKES

Suited for LAN and Telecom Applications




Mechanical

J0010D11 - Filtered Connector

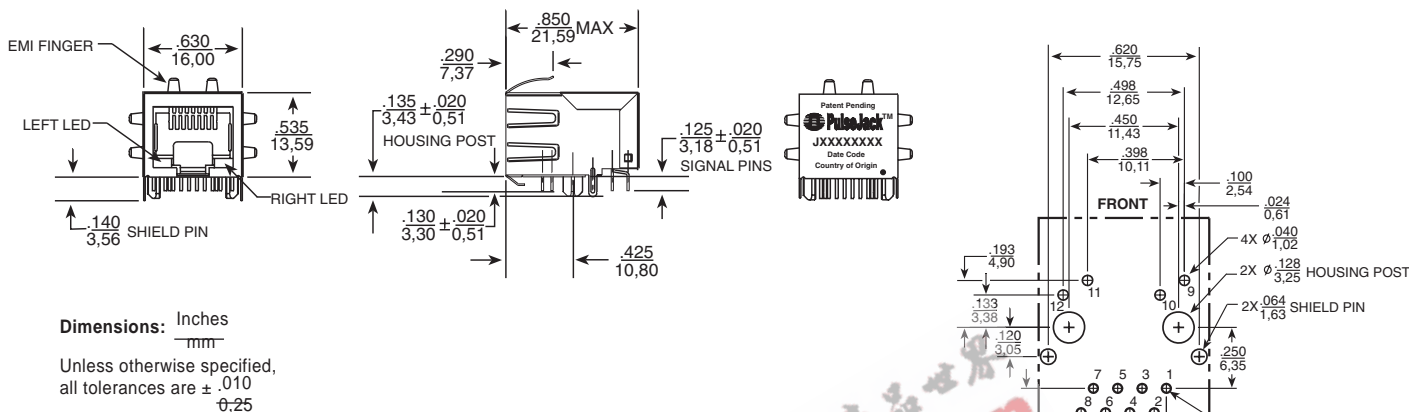

Common Mode Test Circuit for Surface Mount and Through Hole

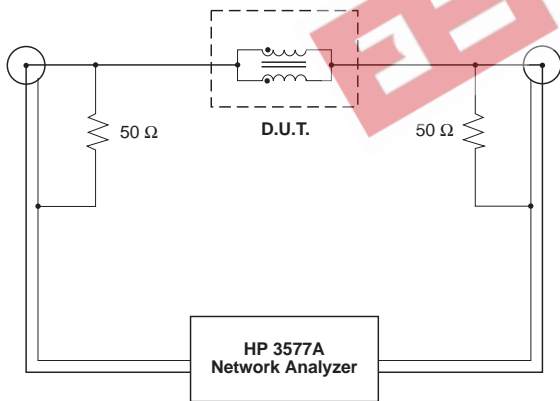

Test Notes:

1. Network analyzer calibrated to compensate for 50 Ω resistors.
2. All windings on a core are connected in parallel for the test.
3. For multi-core chokes, test data is for one core only. The windings on the other core(s) are left unconnected (i.e. open).

For More Information :

UNITED STATES (Worldwide)	UNITED KINGDOM (Northern Europe)	FRANCE (Southern Europe)	SINGAPORE (Southern Asia)	TAIWAN, R.O.C. (Northern Asia)	HONG KONG (China/Hong Kong)	DISTRIBUTOR
12220 World Trade Drive San Diego, CA 92128 U.S.A. http://www.pulseeng.com TEL: 858 674 8100 FAX: 858 674 8262	3 Huxley Road Surrey Research Park Guildford, Surrey GU2 5RE United Kingdom TEL: 44 1483 401700 FAX: 44 1483 401701	Zone Industrielle F-39270 Orgelet France TEL: 33 3 84 35 04 04 FAX: 33 3 84 25 46 41	150 Kampong Ampat #07-01/02 KA Centre Singapore 368324 TEL: 65 6287 8998 FAX: 65 6280 0080	3F-4, No. 81, Sec. 1 HsinTai Wu Road Hsi-Chih, Taipei Hsien Taiwan, R.O.C. Tel: 886 2 2698 0228 FAX: 886 2 2698 0948	9/F, Phase 2, Tai Sang Shatin Warehouse Centre 6 Wong Chuk Yeung Street Fotan Shatin, Hong Kong TEL: 852 2788 6588 FAX: 852 2776 1055	

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2004. Pulse Engineering, Inc. All rights reserved.