


240-805-07 and -08
 "Mighty Mouse" Filter Connector
 Triple-Start ACME Coupling Threads
 Jam Nut Receptacle Versions



Series 80
 Mighty Mouse

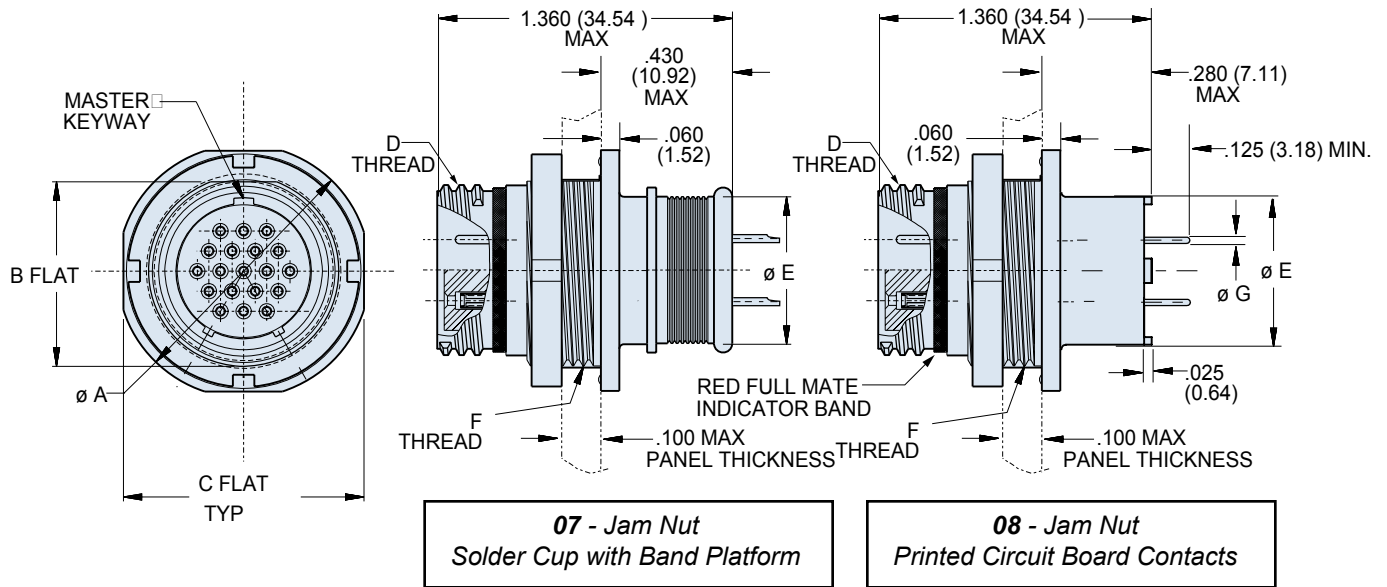

C

DIMENSIONS											
Shell Size	Ø A		B		C		D Threads	Ø E		F Threads	Ø G Tail Dia.
	In.	mm.	In.	mm.	In.	mm.		In.	mm.		
8	.760	19.30	.535	13.59	.730	18.54	.5000-.1P-.3L-TS-2A	.413	10.49	.5625-28 UNEF-2A	#23 .018/.022 (0.46/0.56)
9	.880	22.35	.661	16.79	.850	21.59	.5625-.1P-.3L-TS-2A	.500	12.70	.6875-28 UN-2A	
10	.880	22.35	.661	16.79	.850	21.59	.6250-.1P-.3L-TS-2A	.530	13.46	.6875-28 UN-2A	
11	.955	24.26	.721	18.31	.925	23.50	.6875-.1P-.3L-TS-2A	.558	14.17	.7500-28 UN-2A	
12	1.060	26.92	.784	19.91	1.035	26.29	.7500-.1P-.3L-TS-2A	.655	16.51	.8125-28 UN-2A	
15	1.203	30.56	.970	24.64	1.173	29.79	.9375-.1P-.3L-TS-2A	.708	17.98	1.000-28 UN-2A	
18	1.389	35.28	1.147	29.13	1.359	34.52	1.1250-.1P-.3L-TS-2A	.871	22.12	1.187-28 UN-2A	
19	1.450	36.83	1.221	31.01	1.420	36.07	1.1870-.1P-.3L-TS-2A	.972	24.67	1.250-28 UN-2A	

PANEL CUTOUTS				
Shell Size	A		Ø B	
	In. ± .002	mm. ± 0.05	In.	mm.
8	.545	13.84	.575/.571	14.61/14.50
9	.671	17.04	.700/.696	17.78/17.68
10	.671	17.04	.700/.696	17.78/17.68
11	.731	18.57	.762/.758	19.35/19.25
12	.794	20.17	.825/.821	20.96/20.85
15	.980	24.89	1.012/1.008	25.70/25.60
18	1.157	29.39	1.200/1.196	30.48/30.38
19	1.231	31.27	1.262/1.258	32.05/31.95