

NPN SILICON HIGH FREQUENCY TRANSISTOR


DESCRIPTION:

The **2SC2592** is a High Frequency Transistor Designed for General Purpose VHF-UHF Amplifier Applications.

MAXIMUM RATINGS

I_C	250 mA
V_{CE}	30 V
P_{DISS}	3.5 W @ $T_C = 25^\circ\text{C}$
T_J	-65 to +200 $^\circ\text{C}$
T_{STG}	-65 to +200 $^\circ\text{C}$
θ_{JC}	50 $^\circ\text{C/W}$

PACKAGE STYLE TO-39

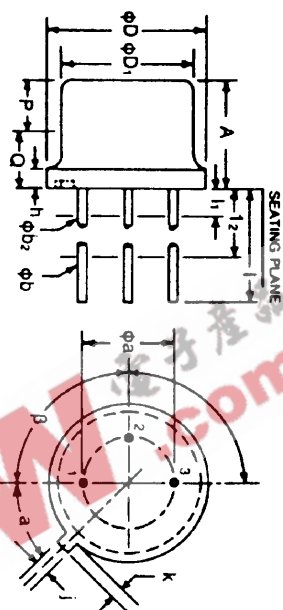

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
ϕa	0.190	0.210	4.83	5.33
A	0.240	0.260	6.10	6.60
ϕb	0.016	0.021	0.406	0.533
ϕb_2	0.016	0.019	0.406	0.483
ϕD	0.350	0.370	8.89	9.40
ϕD_1	0.315	0.335	8.00	8.51
h	0.009	0.125	0.229	3.18
i	0.028	0.034	0.711	0.864
k	0.029	0.040	0.737	1.02
l	0.500		12.70	
l_1		0.050		1.27
l_2	0.250		6.35	
P	0.100		2.54	
Q				
a	45° NOMINAL			
β	90° NOMINAL			

1 = Emitter 2 = Base
3 & 4 = Collector (Case)

CHARACTERISTICS $T_C = 25^\circ\text{C}$

SYMBOL	TEST CONDITIONS			MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CEO}	$I_C = 1.0\text{ mA}$			20			V
BV_{CBO}	$I_C = 100\text{ }\mu\text{A}$			30			V
BV_{EBO}	$I_E = 100\text{ }\mu\text{A}$			3			V
I_{CBO}	$V_{CB} = 20\text{ V}$					10	μA
h_{FE}	$V_{CE} = 10\text{ V}$	$I_C = 80\text{ mA}$		30	80	200	---
f_t	$V_{CE} = 10\text{ V}$	$I_E = 60\text{ mA}$	$f = 200\text{ MHz}$	2800	3300		MHz
C_{CB}	$V_{CB} = 10\text{ V}$		$f = 1.0\text{ MHz}$			2.5	pF
$ S_{21E} ^2$	$V_{CE} = 10\text{ V}$	$I_E = 60\text{ mA}$	$f = 500\text{ MHz}$	8.5			dB
NF	$V_{CE} = 10\text{ V}$	$I_C = 10\text{ mA V}$	$f = 500\text{ MHz}$		3.5		dB