

Features

- Low ON resistance.
 - Very high-speed switching.
 - Low-voltage drive.

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$


Absolute Maximum Ratings at $T_A = 25^\circ C$		Unit
Drain to Source Voltage	V_{DSS}	-30 V
Gate to Source Voltage	V_{GSS}	± 15 V
Drain Current(DC)	I_D	-300 mA
Drain Current(Pulse)	I_{DP}	PW $\leq 10\ \mu s$, duty cycle $\leq 1\%$ -1.2 A
Allowable Power Dissipation	P_D	250 mW
Channel Temperature	T_{ch}	150 $^\circ C$
Storage Temperature	T_{stg}	-55 to +150 $^\circ C$

Electrical Characteristics at Ta = 25°C

Electrical Characteristics at $T_A = 25^\circ C$					
D-S Breakdown Voltage	$V_{(BR)DSS}$	$I_D = -1\text{mA}, V_{GS} = 0$		-30	V
Zero Gate Voltage	I_{DSS}	$V_{DS} = -30\text{V}, V_{GS} = 0$		-100	μA
Drain Current					
Gate to Source Leakage Current	I_{GSS}	$V_{GS} = \pm 12\text{V}, V_{DS} = 0$		± 10	μA
Cutoff Voltage	$V_{GS(\text{off})}$	$V_{DS} = -10\text{V}, I_D = -1\text{mA}$	-1.0	-2.0	V
Forward Transfer Admittance	$\frac{1}{V_{fs}}$	$V_{DS} = -10\text{V}, I_D = -150\text{mA}$	200	350	mS
Static Drain to Source	$R_{DS(on)}$	$I_D = -150\text{mA}, V_{GS} = -10\text{V}$		1.5	2.2
on State Resistance	$R_{DS(on)}$	$I_D = -150\text{mA}, V_{GS} = -4\text{V}$		2.2	3.3
Input Capacitance	C_{iss}	$V_{DS} = -10\text{V}, f = 1\text{MHz}$		50	pF
Output Capacitance	C_{oss}	$V_{DS} = -10\text{V}, f = 1\text{MHz}$		35	pF
Reverse Transfer Capacitance	C_{rss}	$V_{DS} = -10\text{V}, f = 1\text{MHz}$		10	pF
Turn-ON Delay Time	$t_{d(on)}$	See specified Test Circuit.		7	ns
Rise Time	t_r	"		10	ns
Turn-OFF Delay Time	$t_{d(off)}$	"		40	ns
Fall Time	t_f	"		30	ns
Diode Forward Voltage	V_{SD}	$I_S = -300\text{mA}, V_{GS} = 0$		-1	V


Marking : AM

Switching Time Test Circuit

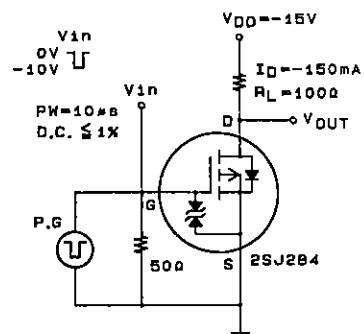









Package Dimensions 2091

(unit : m)

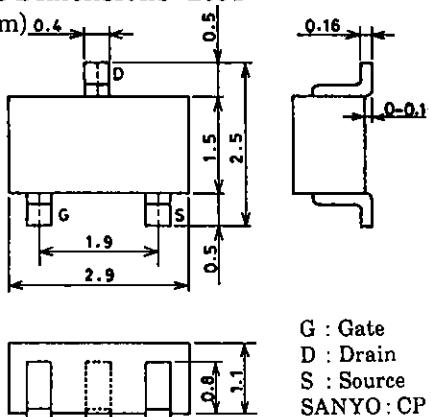

G : Gate
D : Drain
S : Source
SANYO : CP

SANYO Electric Co.,Ltd. Semiconductor Business Headquarters
TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

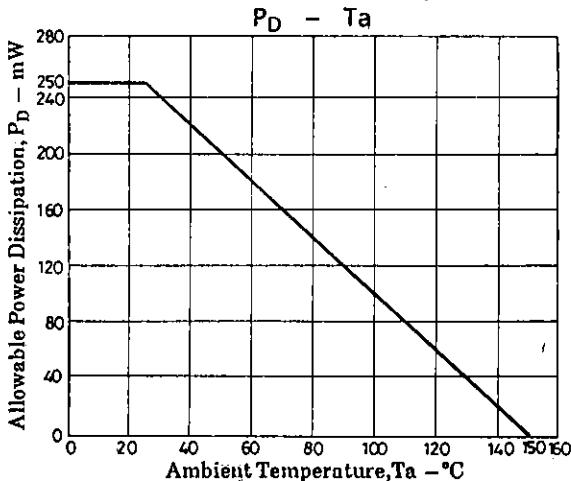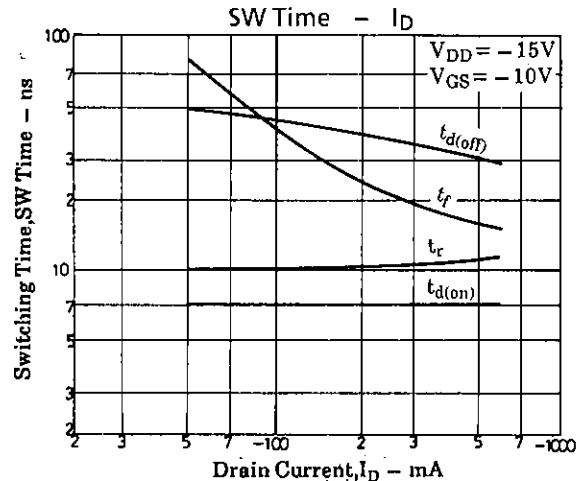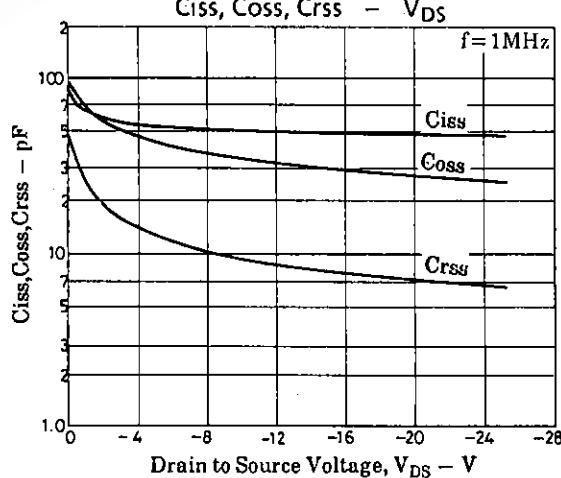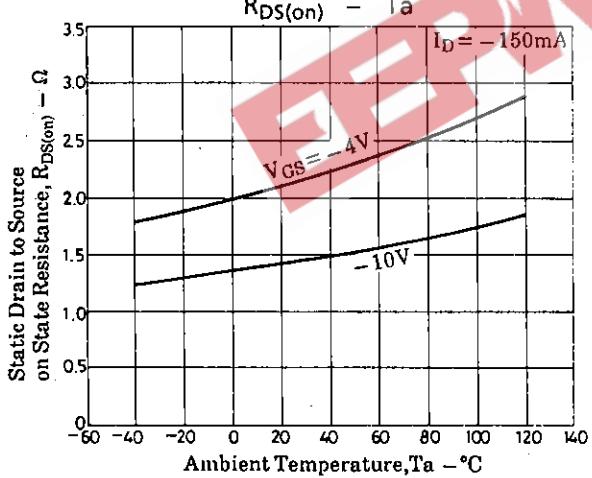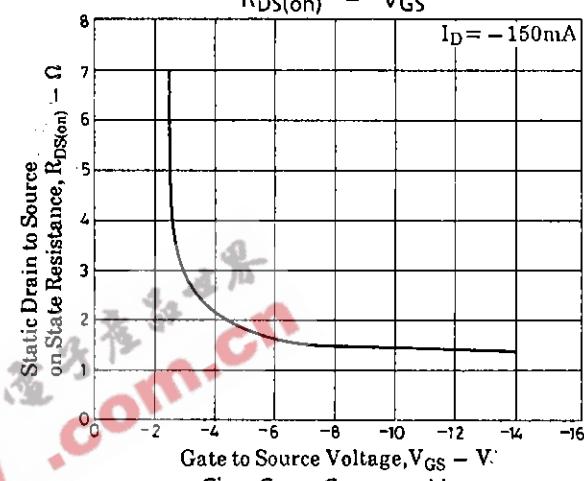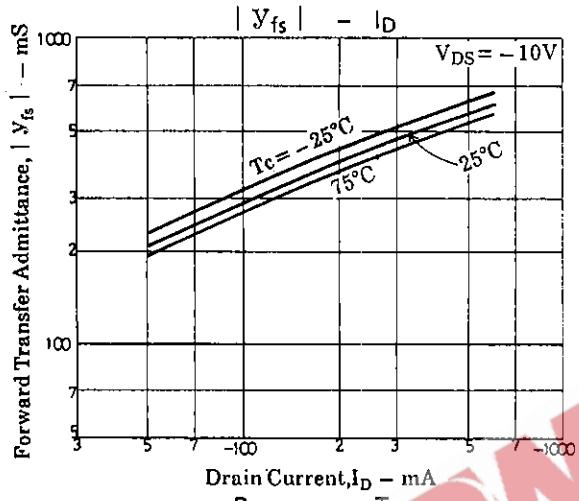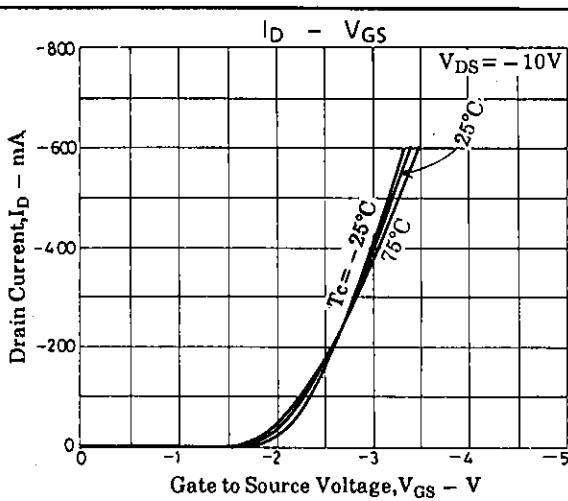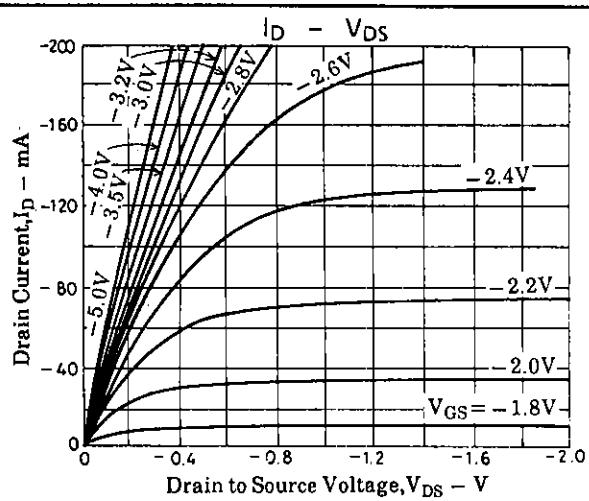

EEN 爱恩电子网 .com.cn

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.