

MD SERIES

P18TG-XXXXE2:1H35M 3.5 KV ISOLATED 4 W REGULATED SINGLE OUTPUT DIP24

Available Inputs:

12, 24 and 48 VDC Wide Input 2:1

Available Outputs:

3.3, 5, 12, 15 and 18 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range 9 -18 VDC (12 VDC), 18 - 36 VDC (24 VDC), 36 - 72 VDC (48 VDC)

Filter Pi Network

Isolation Specifications

Rated voltage 3500 Vdc

Leakage current 1 mA

Resistance 10⁹ Ohm

Capacitance 120 pF typ.

Output Specifications

Voltage accuracy +/- 1 % typ. +/-2% max.

Ripple and noise (at 20 MHz BW) 60 mV p-p, max.

Short circuit protection Continuous , restart automatic

Line voltage regulation +/- 0,5 % max.

Load voltage regulation +/- 0,5 % max.

Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 70 % to 85 %

Switching frequency 250 KHz, typ.

Environmental Specifications

Operating temperature (ambient) -40°C to +85°C

Storage temperature - 55 °C to + 125 °C

Derating See graph

Humidity Up to 90 %, non condensing

Cooling Free air convection

Physical Characteristics

Dimensions 31,75 x 20,32 x 10,16 mm

1,25 x 0,80 x 0,40 inches


Weight 19,0 g

Case material Nickel Coated Copper

Examples of Partnumbers/Modelcode

PART NO.	INPUT VOLTAGE (VDC) Nominal	INPUT CURRE NT NO LOAD	INPUT CURRENT FULL LOAD	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)	EFFICIENCY FULL LOAD (% TYP.)
P18TG-123R3E2:1H35M	9-18	24	367	3,3	1000	75
P18TG-1205E2:1H35M	9-18	24	456	5	800	73
P18TG-1212E2:1H35M	9-18	24	428	12	333	78
P18TG-2405E2:1H35M	18-36	20	222	5	800	75
P18TG-2412E2:1H35M	18-36	20	214	12	333	78
P18TG-2415E2:1H35M	18-36	20	206	15	267	81
P18TG-4805E2:1H35M	36-72	18	111	5	800	75

Dimensions

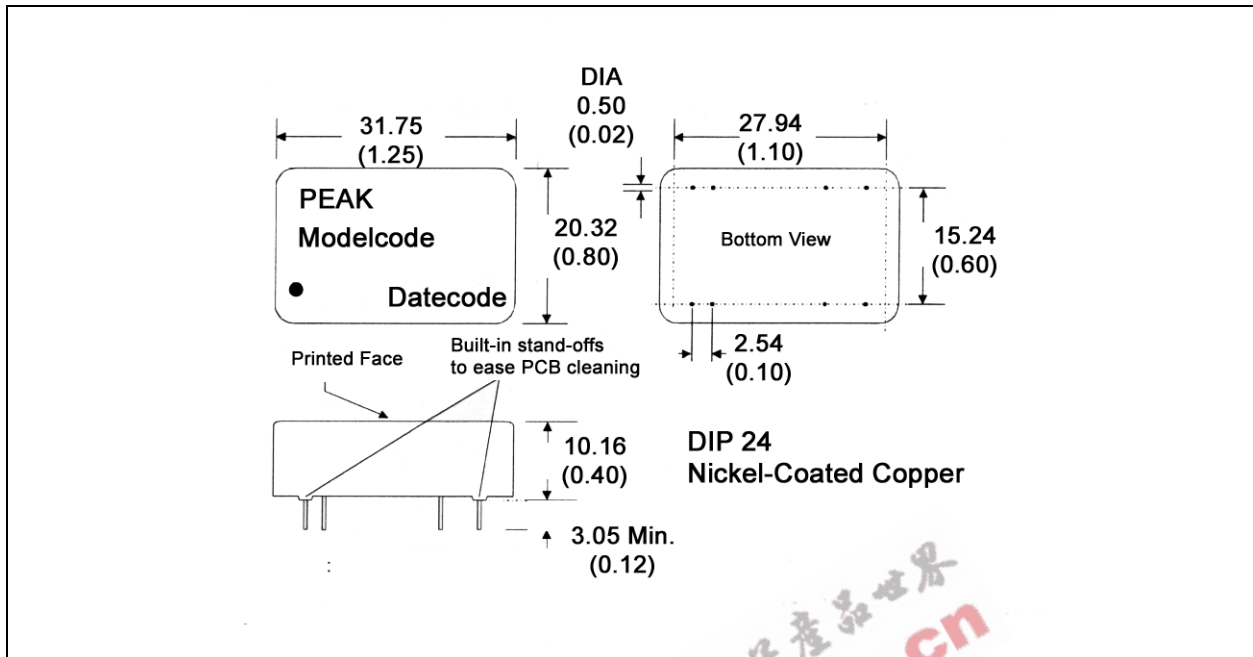

Derating Graph and Pinning

