


Ceramic Stand-off Insulators for RF-Equipment

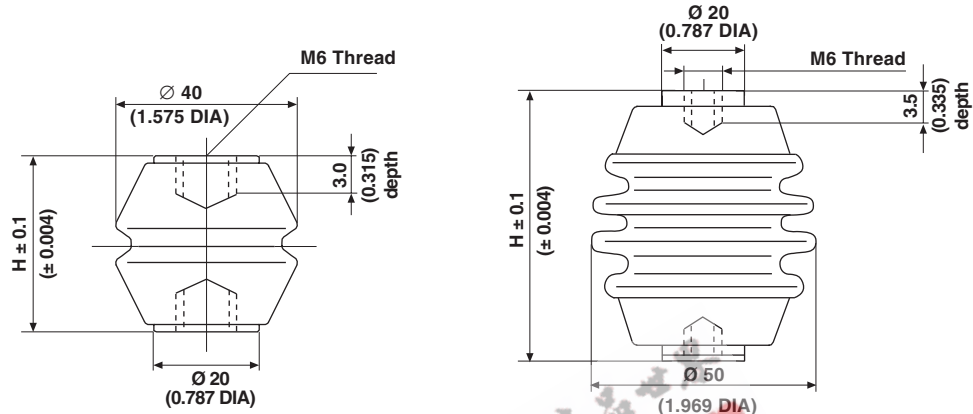

• Dimensions in millimeters (inches)

STAND-OFF INSULATOR 4040/6						
DIMENSION H	CAPACITANCE VALUE	FLASHOVER VOLTAGE AT 50 Hz AND 60 % REL. AIR HUMIDITY	OPERATING VOLTAGE	DISSIPATION FACTOR	COMPRESSIVE LOAD	REACTIVE CURRENT
	[pF]	[KV _{RMS}]	[KV _{RMS}]		[kN]	[A _{rms}]
40 (1.575)	1.6	24	4 max.	$\leq 0.5 \cdot 10^{-3}$ [1 MHz]	5.0 max.	1 max.

Thread holes M8 as well as thread-holes according to US standard are available on request.

STAND-OFF INSULATOR 5058/6						
DIMENSION H	CAPACITANCE VALUE	FLASHOVER VOLTAGE AT 50 Hz AND 60 % REL. AIR HUMIDITY	OPERATING VOLTAGE	DISSIPATION FACTOR	COMPRESSIVE LOAD	REACTIVE CURRENT
	[pF]	[KV _{RMS}]	[KV _{RMS}]		[kN]	[A _{rms}]
58 (2.283)	1.0	35	12 max.	$\leq 0.5 \cdot 10^{-3}$ [1 MHz]	20.0 max.	3 max.

Thread holes M8 and M10 as well as thread-holes according to US standard are available on request.

MATERIAL:

Stand-off insulator elements made from Class 1 Ceramic material (C221-IEC 60672-3), body completely glazed.
Connection terminals: brass

OPERATING CONDITIONS:

Maximum operating temperature + 100 °C

MARKING:

None

ORDERING INFORMATION
Stand-off insulator 5058/6



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.