

International  
**IR** Rectifier

## 40HF(R) SERIES

STANDARD RECOVERY DIODES

Stud Version

### Features

- High surge current capability
- Stud cathode and stud anode version
- Leaded version available
- Types up to 1600V  $V_{RRM}$


40 A

### Typical Applications

- Battery charges
- Converters
- Power supplies
- Machine tool controls
- Welding

### Major Ratings and Characteristics

Parameters	40HF(R)		Units	
	10 to 120	140, 160		
$I_{F(AV)}$	40	40	A	
@ $T_C$	140	110	°C	
$I_{F(RMS)}$	62		A	
$I_{FSM}$	@ 50Hz	570	A	
	@ 60Hz	595	A	
$I^2t$	@ 50Hz	1600	A <sup>2</sup> s	
	@ 60Hz	1450	A <sup>2</sup> s	
$V_{RRM}$	range	100 to 1200	1400, 1600	V
$T_J$	range	- 65 to 190	- 65 to 160	°C

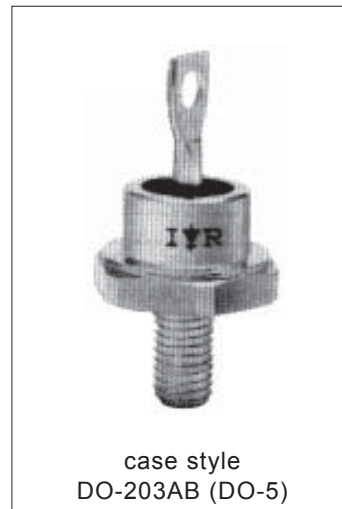

## 40HF(R) Series

Bulletin I20201 rev. C 03/04

International  
IR Rectifier

### ELECTRICAL SPECIFICATIONS

#### Voltage Ratings

Type number	Voltage Code	$V_{RRM}$ , maximum repetitive peak reverse voltage V	$V_{RSM}$ , maximum non-repetitive peak reverse voltage V	$I_{RRM}$ max. @ $T_J = T_{J \text{ max.}}$ mA
40HF(R)	10	100	200	9
	20	200	300	
	40	400	500	
	60	600	700	
	80	800	900	
	100	1000	1100	
	120	1200	1300	
	140	1400	1500	4.5
160	1600	1700		

#### Forward Conduction

Parameter	40HF(R)		Units	Conditions		
	10 to 120	140, 160				
$I_{F(AV)}$ Max. average forward current @ Case temperature	40	40	A	180° conduction, half sine wave		
$I_{F(RMS)}$ Max. RMS forward current	140	110	°C			
$I_{F(RMS)}$ Max. RMS forward current	62		A			
$I_{FSM}$ Max. peak, one-cycle forward, non-repetitive surge current	570		A	t = 10ms	No voltage reappplied	Sinusoidal half wave, Initial $T_J = T_{J \text{ max.}}$
	595			t = 8.3ms	reappplied	
	480			t = 10ms	100% $V_{RRM}$ reappplied	
	500			t = 8.3ms	reappplied	
$I^2t$ Maximum $I^2t$ for fusing	1600		A <sup>2</sup> s	t = 10ms	No voltage reappplied	
	1450			t = 8.3ms	reappplied	
	1150			t = 10ms	100% $V_{RRM}$ reappplied	
	1050			t = 8.3ms	reappplied	
$I^2vt$ Maximum $I^2vt$ for fusing	16000		A <sup>2</sup> /s	t = 0.1 to 10ms, no voltage reappplied		
$V_{F(TO)}$ Value of threshold voltage (up to 1200V)	0.65		V	$T_J = T_{J \text{ max.}}$		
$V_{F(TO)}$ Value of threshold voltage (for 1400V, 1600V)	0.76		V	$T_J = T_{J \text{ max.}}$		
$r_f$ Value of forward slope resistance (up to 1200V)	4.29		mΩ	$T_J = T_{J \text{ max.}}$		
$r_f$ Value of forward slope resistance (for 1400V, 1600V)	3.8			$T_J = T_{J \text{ max.}}$		
$V_{FM}$ Max. forward voltage drop	1.30	1.50	V	$I_{pk} = 125A, T_J = 25^\circ C, t_p = 400\mu s$ rectangular wave		

Thermal and Mechanical Specifications

Parameter	40HF(R)		Units	Conditions
	10 to 120	140 to 160		
T <sub>J</sub> Max. junction operating temperature range	-65 to 190	-65 to 160	°C	
T <sub>stg</sub> Max. storage temperature range	-65 to 190	-65 to 160		
R <sub>thJC</sub> Max. thermal resistance, junction to case	0.95		K/W	DC operation
R <sub>thCS</sub> Max. thermal resistance, case to heatsink	0.25			Mounting surface, smooth, flat and greased
T Max. allowed mounting torque ±10%	2.3 - 3.4		Nm	Not lubricated threads
	20 - 30		lbf · in	
wt Approximate weight	17 (0.6)		g (oz)	unleaded device
Case style	DO-203AB (DO5)			See Outline Table

$\Delta R_{thJC}$  Conduction

(The following table shows the increment of thermal resistance R<sub>thJC</sub> when devices operate at different conduction angles than DC)

Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.14	0.10	K/W	T <sub>J</sub> = T <sub>J</sub> max.
120°	0.16	0.17		
90°	0.21	0.22		
60°	0.30	0.31		
30°	0.50	0.50		

Ordering Information Table

Device Code				
40	HF	R	160	M
①	②	③	④	⑤
<b>1</b>	- 40 = Standard device 41 = Not isolated lead 42 = Isolated lead with silicone sleeve (Red = Reverse polarity) (Blue = Normal polarity)			
<b>2</b>	- Standard diode			
<b>3</b>	- None = Stud Normal Polarity (Cathode to Stud) R = Stud Reverse Polarity (Anode to Stud)			
<b>4</b>	- Voltage code: Code x 10 = V <sub>RRM</sub> (See Voltage Ratings table)			
<b>5</b>	- None = Stud base DO-203AB (DO-5) 1/4" 28UNF-2A M = Stud base DO-203AB (DO-5) M6 X 1			





## 40HF(R) Series

Bulletin I20201 rev. C 03/04

International  
IRF Rectifier

### Outlines Table



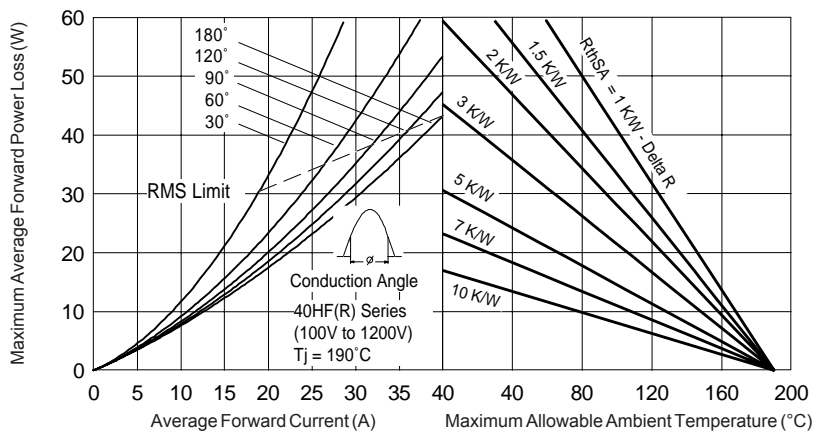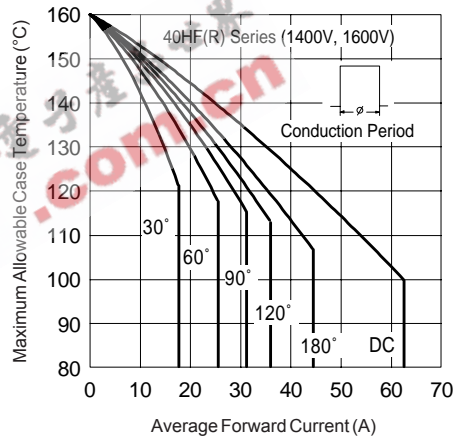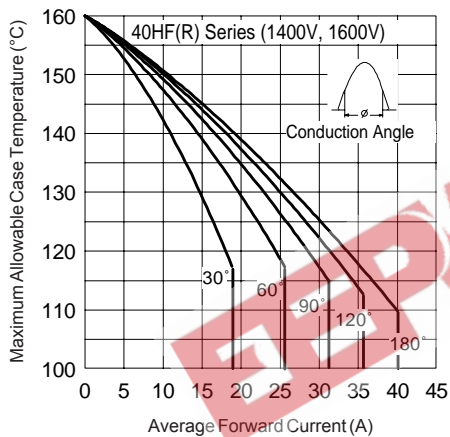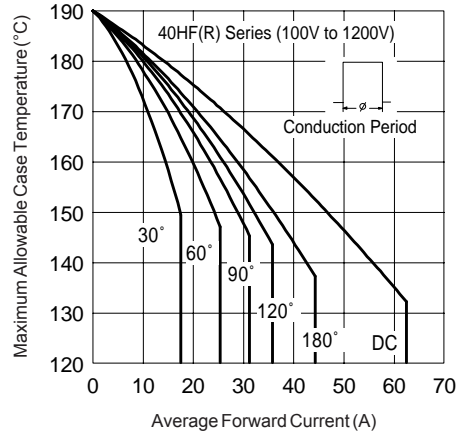

# 40HF(R) Series

Bulletin I20201 rev. C 03/04



Fig. 6 - Forward Power Loss Characteristics

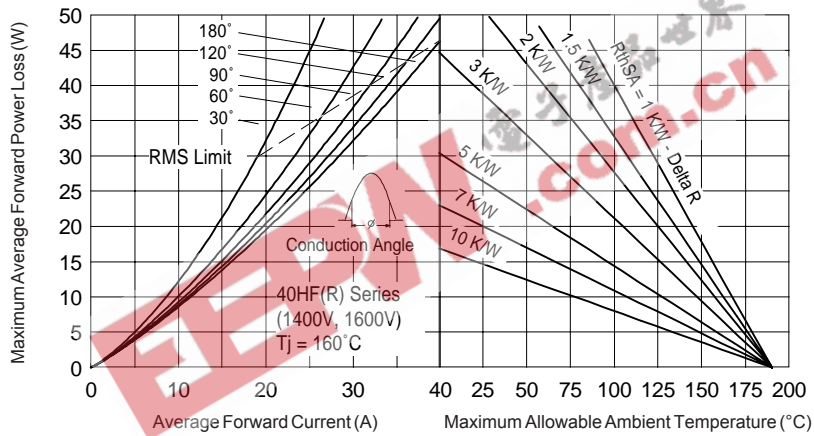


Fig. 7 - Forward Power Loss Characteristics

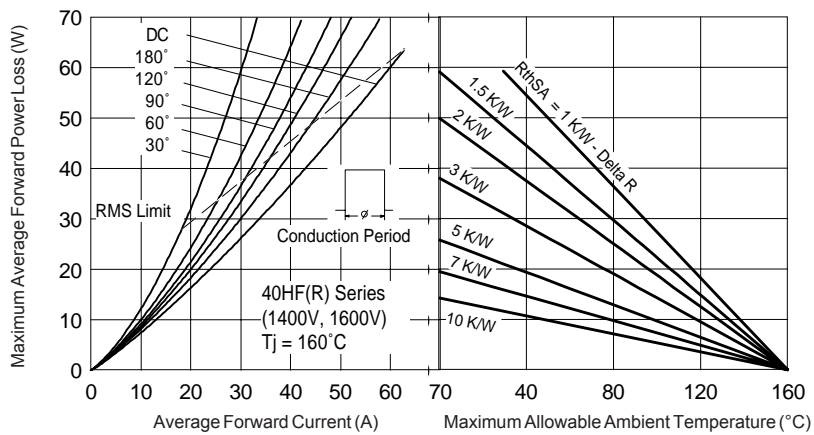


Fig. 8 - Forward Power Loss Characteristics



Fig. 9 - Maximum Non-Repetitive Surge Current



Fig. 10 - Maximum Non-Repetitive Surge Current

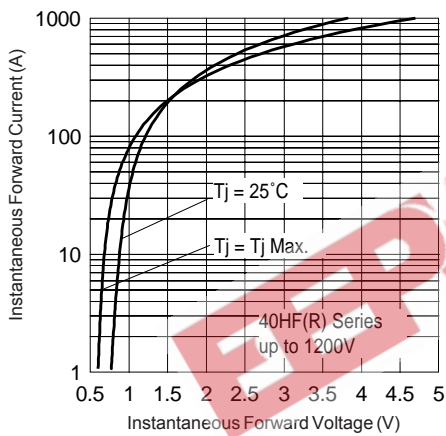


Fig. 11 - Forward Voltage Drop Characteristics (up to 1200V)

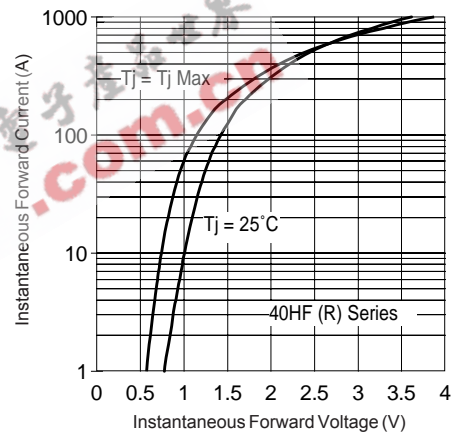


Fig. 12 - Forward Voltage Drop Characteristics (for 1400V, 1600V)

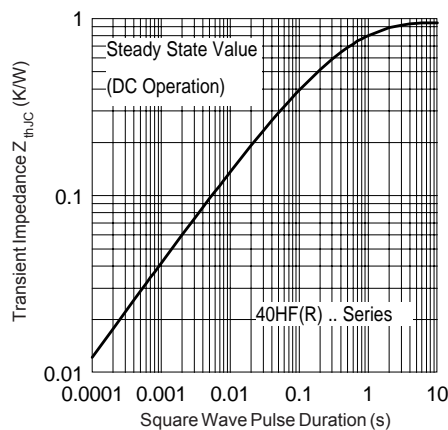


Fig. 13 - Thermal Impedance  $Z_{thJC}$  Characteristics

## 40HF(R) Series

Bulletin I20201 rev. C 03/04

International  
**IR** Rectifier

EEPW 电子产品世界  
.com.cn

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.

International  
**IR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
Visit us at [www.irf.com](http://www.irf.com) for sales contact information. 03/04