

54ACTQ04 Quiet Series Hex Inverter

General Description


The 'ACTQ04 contains six inverters and utilizes NSC Quiet Series technology to guarantee quiet output switching and improved dynamic threshold performance. FACT Quiet Series™ features GTO™ output control and undershoot corrector in addition to a split ground bus for superior AC MOS performance.

- Guaranteed simultaneous switching noise level and dynamic threshold performance
- Improved latch-up immunity
- Minimum 4 kV ESD protection
- Outputs source/sink 24 mA
- 'ACTQ04 has TTL-compatible inputs
- Standard Microcircuit Drawing (SMD) 5962-8973401

Features

- I_{CC} reduced by 50%


Logic Symbol




| Pin Names | Description |
|-------------|-------------|
| A_n | Inputs |
| \bar{O}_n | Outputs |

Connection Diagrams

Pin Assignment for DIP and Flatpak



Pin Assignment for LCC



Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--|--------------------------|
| Supply Voltage (V_{CC}) | -0.5V to +7.0V |
| DC Input Diode Current (I_{IK}) | |
| $V_I = -0.5V$ | -20 mA |
| $V_I = V_{CC} + 0.5V$ | +20 mA |
| DC Input Voltage (V_I) | -0.5V to $V_{CC} + 0.5V$ |
| DC Output Diode Current (I_{OK}) | |
| $V_O = -0.5V$ | -20 mA |
| $V_O = V_{CC} + 0.5V$ | +20 mA |
| DC Output Voltage (V_O) | -0.5V to $V_{CC} + 0.5V$ |
| DC Output Source | |
| or Sink Current (I_O) | ±50 mA |
| DC V_{CC} or Ground Current | |
| per Output Pin (I_{CC} or I_{GND}) | ±50 mA |
| Storage Temperature (T_{STG}) | -65°C to +150°C |
| DC Latch-up Source | |
| or Sink Current | ±300 mA |
| Junction Temperature (T_J) | |

CDIP

175°C

Recommended Operating Conditions (Note 2)

| | |
|---------------------------------|-----------------|
| Supply Voltage (V_{CC}) | |
| 'ACTQ | 4.5V to 5.5V |
| Input Voltage (V_I) | 0V to V_{CC} |
| Output Voltage (V_O) | 0V to V_{CC} |
| Operating Temperature (T_A) | |
| 54ACTQ | -55°C to +125°C |
| Minimum Input Edge Rate (dV/dt) | |
| 'ACTQ Devices | 125 mV/ns |
| V_{IN} from 0.8V to 2.0V | |
| V_{CC} @ 4.5V, 5.5V | |

Note 1: Absolute maximum ratings are those values beyond which damage to the device may occur. The databook specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. National does not recommend operation outside of databook specifications.

Note 2: All commercial packaging is not recommended for applications requiring greater than 2000 temperature cycles from -40°C to +125°C.

DC Characteristics for 'ACTQ Family Devices

| Symbol | Parameter | V_{CC} (V) | 54ACTQ | Units | Conditions |
|-----------|--|-----------------|----------------------------|-------|---|
| | | | $T_A =$ -55°C to +125°C | | |
| | | | Guaranteed Limits | | |
| V_{IH} | Minimum High Level Input Voltage | 4.5 | 2.0 | V | $V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$ |
| | | 5.5 | 2.0 | | |
| V_{IL} | Maximum Low Level Input Voltage | 4.5 | 0.8 | V | $V_{OUT} = 0.1V$ or $V_{CC} - 0.1V$ |
| | | 5.5 | 0.8 | | |
| V_{OH} | Minimum High Level Output Voltage | 4.5 | 4.4 | V | $I_{OUT} = -50 \mu A$ |
| | | 5.5 | 5.4 | | |
| | | 4.5 | 3.70 | V | (Note 3) $V_{IN} = V_{IL}$ or V_{IH} $I_{OH} = -24 \text{ mA}$ $I_{OH} = -24 \text{ mA}$ |
| | | 5.5 | 4.70 | | |
| V_{OL} | Maximum Low Level Output Voltage | 4.5 | 0.1 | V | $I_{OUT} = 50 \mu A$ |
| | | 5.5 | 0.1 | | |
| | | 4.5 | 0.50 | V | (Note 3) $V_{IN} = V_{IL}$ or V_{IH} $I_{OL} = 24 \text{ mA}$ $I_{OL} = 24 \text{ mA}$ |
| | | 5.5 | 0.50 | | |
| I_{IN} | Maximum Input Leakage Current | 5.5 | ±1.0 | μA | $V_I = V_{CC}, GND$ |
| I_{CCT} | Maximum $I_{CC}/Input$ | 5.5 | 1.6 | mA | $V_I = V_{CC} - 2.1V$ |
| I_{OLD} | Minimum Dynamic | 5.5 | 50 | mA | $V_{OLD} = 1.65V \text{ Max}$ |
| I_{OHD} | Output Current (Note 4) | 5.5 | -50 | mA | $V_{OHD} = 3.85V \text{ Min}$ |
| I_{CC} | Maximum Quiescent Supply Current | 5.5 | 40.0 | μA | $V_{IN} = V_{CC}$ or GND (Note 5) |
| V_{OLP} | Quiet Output Maximum Dynamic V_{OL} | 5.0 | 1.5 | V | 13 (Note 6) |

DC Characteristics for 'ACTQ Family Devices (Continued)

| Symbol | Parameter | V _{CC} (V) | 54ACTQ | Units | Conditions |
|------------------|---|------------------------|-------------------------------------|-------|------------------------------|
| | | | T _A = -55°C to +125°C | | |
| | | | Guaranteed Limits | | |
| V _{OLV} | Quiet Output Minimum Dynamic V _{OL} | 5.0 | -1.2 | V | Figures 2-12, 13 (Note 6) |

Note 3: All outputs loaded; thresholds on input associated with output under test.

Note 4: Maximum test duration 2.0 ms, one output loaded at a time.

Note 5: I_{CC} for 54ACTQ @ 25°C is identical to 74ACTQ @ 25°C.

Note 6: Max number of outputs defined as (n). Data inputs are 0V to 3V. One output @ GND.

Note 7: Max number of data inputs (n) switching. (n-1) inputs switching 0V to 3V ('ACTQ). Input-under-test switching: 3V to threshold (V_{ILD}), 0V to threshold (V_{IHD}). f = 1 MHz.

AC Electrical Characteristics

| Symbol | Parameter | V _{CC} (V) (Note 8) | 54ACTQ | | Units | Fig. No. |
|------------------|-------------------------------------|------------------------------------|-------------------------------------|-----|-------|----------|
| | | | T _A = -55°C to +125°C | | | |
| | | | C _L = 50 pF | | | |
| | | | Min | Max | | |
| t _{PLH} | Propagation Delay Data to Output | 5.0 | 1.0 | 9.5 | ns | |
| t _{PHL} | Propagation Delay Data to Output | 5.0 | 1.0 | 9.5 | ns | |



Note 8: Voltage Range 5.0 is 5.0V ±0.5V.

Note 9: Skew is defined as the absolute value of the difference between the actual propagation delay for any two separate outputs of the same device. The specification applies to any outputs switching in the same direction, either HIGH to LOW (t_{OSHL}) or LOW to HIGH (t_{OSLH}). Parameter guaranteed by design.



Capacitance

| Symbol | Parameter | Typ | Units | Conditions |
|-----------------|----------------------------------|-----|-------|------------------------|
| C _{IN} | Input Capacitance | 4.5 | pF | V _{CC} = OPEN |
| C _{PD} | Power Dissipation Capacitance | 75 | pF | V _{CC} = 5.0V |


Physical Dimensions inches (millimeters) unless otherwise noted

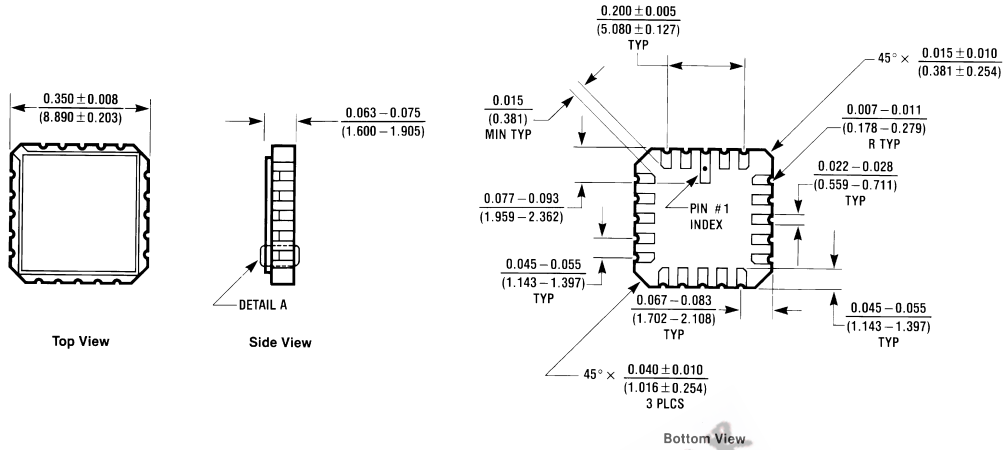

20-Terminal Ceramic Leadless Chip Carrier (L)
NS Package Number E20A

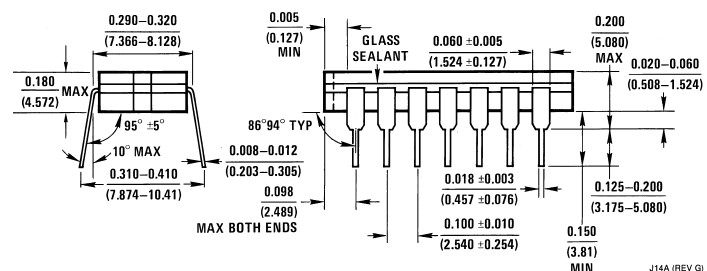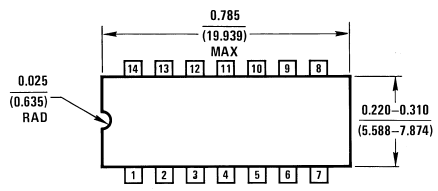

14-Lead Ceramic Dual-In-Line Package (D)
NS Package Number J14A

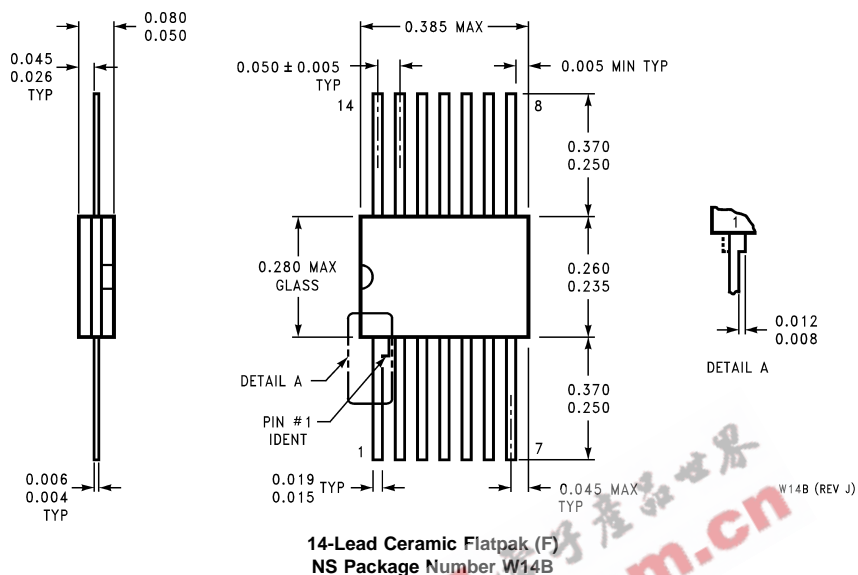Physical Dimensions inches (millimeters) unless otherwise noted (Continued)**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com

www.national.com

National Semiconductor Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor Asia Pacific Customer Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

National Semiconductor Japan Ltd.
Tel: 81-3-5620-6175
Fax: 81-3-5620-6179