



May 2002  
Revised May 2002

## 74LVXZ161284

### Low Voltage IEEE 161284 Translating Transceiver with Power-Up Protection

#### General Description

The LVXZ161284 contains eight bidirectional data buffers and eleven control/status buffers to implement a full IEEE 1284 compliant interface. The device supports the IEEE 1284 standard and is intended to be used in an Extended Capabilities Port mode (ECP). The pinout allows for easy connection from the Peripheral (A-side) to the Host (cable side).

Outputs on the cable side can be configured to be either open drain or high drive ( $\pm 14$  mA) and are connected to a separate power supply pin ( $V_{CC-Cable}$ ) that allows these outputs to be driven by a higher supply voltage than the A-side. The pull-up and pull-down series termination resistance of these outputs on the cable side is optimized to drive an external cable. In addition, the C inputs and the B and Y outputs on the cable side contain internal pull-up resistors connected to the  $V_{CC-Cable}$  supply to provide proper input termination and pull-ups for open drain output mode.

Outputs on the Peripheral side are standard low-drive CMOS outputs designed to interface with 3V logic. The DIR input controls data flow on the  $A_1-A_8/B_1-B_8$  transceiver pins.

This device also has an added power-up protection feature which forces the Y outputs ( $Y_9 - Y_{13}$ ) to a high state after power-on until one of the associated inputs ( $A_9 - A_{13}$ ) goes HIGH. When an associated input ( $A_9 - A_{13}$ ) goes HIGH, all Y outputs ( $Y_9 - Y_{13}$ ) are activated.


#### Features

- Supports IEEE 1284 Level 1 and Level 2 signaling standards for bidirectional parallel communications between personal computers and printing peripherals
- Translation capability allows outputs on the cable side to interface with 5V signals
- All inputs have hysteresis to provide noise margin
- B and Y output resistance optimized to drive external cable
- B and Y outputs in high impedance mode during power down
- C inputs and B, Y outputs on cable side have internal 1.4 k $\Omega$  pull-up resistors
- Flow-through pin configuration allows easy interface between the "Peripheral and Host"
- Replaces the function of two (2) 74ACT1284 devices
- Power-up protection prevents errors when the printer is powered on but no valid signal is at the input pins ( $A_9 - A_{13}$ ).


#### Ordering Code

Order Number	Package Number	Package Description
74LVXZ161284MEA	MS48A	48-Lead Small Shrink Outline Package (SSOP), JEDEC MO-118, 0.300" Wide [RAIL]
74LVXZ161284MEX	MS48A	48-Lead Small Shrink Outline Package (SSOP), JEDEC MO-118, 0.300" Wide [TAPE and REEL]
74LVXZ161284MTD	MTD48	48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide [RAIL]
74LVXZ161284MTX	MTD48	48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide [TAPE and REEL]

### Logic Symbol

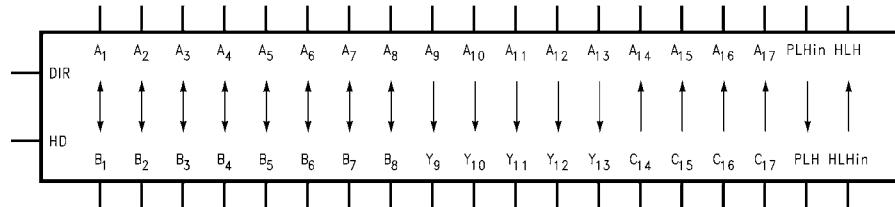

### Connection Diagram

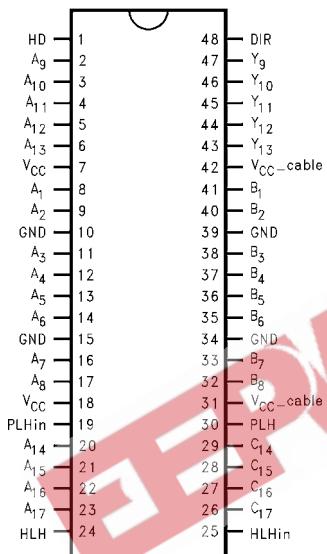

### Pin Descriptions

Pin Names	Description
HD	High Drive Enable Input (Active HIGH)
DIR	Direction Control Input
A <sub>1</sub> -A <sub>8</sub>	Inputs or Outputs
B <sub>1</sub> -B <sub>8</sub>	Inputs or Outputs
A <sub>9</sub> -A <sub>13</sub>	Inputs
Y <sub>9</sub> -Y <sub>13</sub>	Outputs
A <sub>14</sub> -A <sub>17</sub>	Outputs
C <sub>14</sub> -C <sub>17</sub>	Inputs
PLHIN	Peripheral Logic HIGH Input
PLH	Peripheral Logic HIGH Output
HLHIN	Host Logic HIGH Input
HLH	Host Logic HIGH Output



### Truth Table

DIR	HD	Inputs		Outputs	
		L	H	L	H
L	L	B <sub>1</sub> -B <sub>8</sub> Data to A <sub>1</sub> -A <sub>8</sub> , and A <sub>9</sub> -A <sub>13</sub> Data to Y <sub>9</sub> -Y <sub>13</sub> (Note 1) C <sub>14</sub> -C <sub>17</sub> Data to A <sub>14</sub> -A <sub>17</sub> PLH Open Drain Mode			
L	H	B <sub>1</sub> -B <sub>8</sub> Data to A <sub>1</sub> -A <sub>8</sub> , and A <sub>9</sub> -A <sub>13</sub> Data to Y <sub>9</sub> -Y <sub>13</sub> C <sub>14</sub> -C <sub>17</sub> Data to A <sub>14</sub> -A <sub>17</sub>			
H	L	A <sub>1</sub> -A <sub>8</sub> Data to B <sub>1</sub> -B <sub>8</sub> (Note 2) A <sub>9</sub> -A <sub>13</sub> Data to Y <sub>9</sub> -Y <sub>13</sub> (Note 1) C <sub>14</sub> -C <sub>17</sub> Data to A <sub>14</sub> -A <sub>17</sub> PLH Open Drain Mode			
H	H	A <sub>1</sub> -A <sub>8</sub> Data to B <sub>1</sub> -B <sub>8</sub> A <sub>9</sub> -A <sub>13</sub> Data to Y <sub>9</sub> -Y <sub>13</sub> C <sub>14</sub> -C <sub>17</sub> Data to A <sub>14</sub> -A <sub>17</sub>			


Note 1: Y<sub>9</sub>-Y<sub>13</sub> Open Drain Outputs with 1.4 kΩ pullups

Note 2: B<sub>1</sub>-B<sub>8</sub> Open Drain Outputs with 1.4 kΩ pullups

## Logic Diagrams

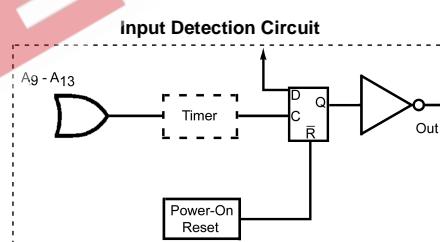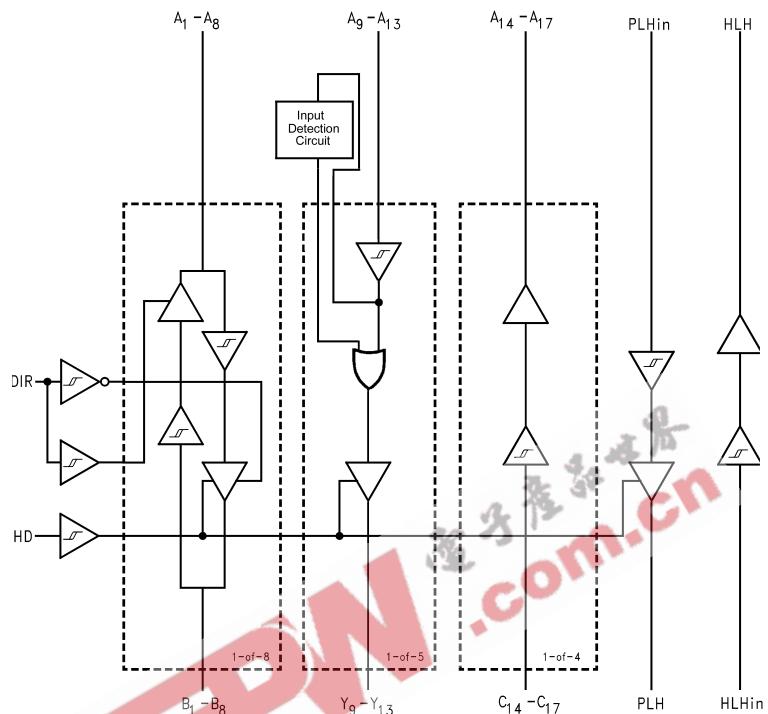

$V_{CC} = 3.3V$   
 $V_{CC\text{-Cable}} = 5V$   
 $T_A = 25^\circ C$   
Initial Activation Time = 140ns typical

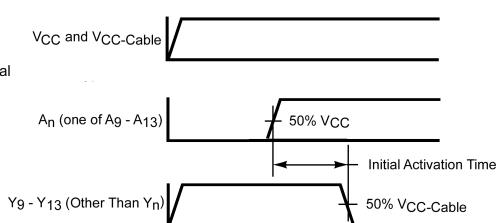

$A_n$  (One of  $A_9 - A_{13}$ ) is Switched as Shown Above and Other Four Inputs are Forced at Low State

**FIGURE 1. Input Detection Circuit Timing**

<b>Absolute Maximum Ratings</b> (Note 3)			<b>Recommended Operating Conditions</b>				
Supply Voltage			Supply Voltage				
$V_{CC}$	-0.5V to +4.6V		$V_{CC}$	3.0V to 3.6V			
$V_{CC}$ —Cable	-0.5V to +7.0V		$V_{CC}$ —Cable	3.0V to 5.5V			
$V_{CC}$ —Cable Must Be $\geq V_{CC}$			DC Input Voltage ( $V_I$ )	0V to $V_{CC}$			
Input Voltage ( $V_I$ )—(Note 4)			Open Drain Voltage ( $V_O$ )	0V to 5.5V			
$A_1-A_{13}$ , PLH <sub>IN</sub> , DIR, HD	-0.5V to $V_{CC} + 0.5V$		Operating Temperature ( $T_A$ )	-40°C to +85°C			
$B_1-B_8$ , C <sub>14</sub> –C <sub>17</sub> , HLH <sub>IN</sub>	-0.5V to +5.5V (DC)						
$B_1-B_8$ , C <sub>14</sub> –C <sub>17</sub> , HLH <sub>IN</sub>	-2.0V to +7.0V*						
	*40 ns Transient						
Output Voltage ( $V_O$ )							
$A_1-A_8$ , A <sub>14</sub> –A <sub>17</sub> , HLH	-0.5V to $V_{CC} + 0.5V$						
$B_1-B_8$ , Y <sub>9</sub> –Y <sub>13</sub> , PLH	-0.5V to +5.5V (DC)						
$B_1-B_8$ , Y <sub>9</sub> –Y <sub>13</sub> , PLH	-2.0V to +7.0V*						
	*40 ns Transient						
DC Output Current ( $I_O$ )							
$A_1-A_8$ , HLH	$\pm 25$ mA						
$B_1-B_8$ , Y <sub>9</sub> –Y <sub>13</sub>	$\pm 50$ mA						
PLH (Output LOW)	84 mA						
PLH (Output HIGH)	-50 mA						
Input Diode Current ( $I_{IK}$ )—(Note 4)							
DIR, HD, A <sub>9</sub> –A <sub>13</sub> , PLH, HLH, C <sub>14</sub> –C <sub>17</sub>	-20 mA						
Output Diode Current ( $I_{OK}$ )							
$A_1-A_8$ , A <sub>14</sub> –A <sub>17</sub> , HLH	$\pm 50$ mA						
$B_1-B_8$ , Y <sub>9</sub> –Y <sub>13</sub> , PLH	-50 mA						
DC Continuous $V_{CC}$ or Ground Current	$\pm 200$ mA						
Storage Temperature	-65°C to +150°C						
ESD							
Human Body Model	4000V						
Machine Model	200V						
Charged Device Model	2000V						
<b>Note 3:</b> Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Fairchild does not recommend operation outside the databook specifications.							
<b>Note 4:</b> Either voltage limit or current limit is sufficient to protect inputs.							
<b>DC Electrical Characteristics</b>							
Symbol	Parameter	$V_{CC}$ (V)	$V_{CC}$ —Cable (V)	$T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$	$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$	Units	Conditions
				<b>Guaranteed Limits</b>			
$V_{IK}$	Input Clamp Diode Voltage	3.0	3.0	-1.2	-1.2	V	$I_I = -18$ mA
$V_{IH}$	Minimum HIGH Level Input Voltage	$A_n$ , $B_n$ , PLH <sub>IN</sub> , DIR, HD	3.0–3.6	3.0–5.5	2.0	2.0	V
		$C_n$	3.0–3.6	3.0–5.5	2.3	2.3	
		HLH <sub>IN</sub>	3.0–3.6	3.0–5.5	2.6	2.6	
$V_{IL}$	Maximum LOW Level Input Voltage	$A_n$ , $B_n$ , PLH <sub>IN</sub> , DIR, HD	3.0–3.6	3.0–5.5	0.8	0.8	V
		$C_n$	3.0–3.6	3.0–5.5	0.8	0.8	
		HLH <sub>IN</sub>	3.0–3.6	3.0–5.5	1.6	1.6	
$\Delta V_T$	Minimum Input Hysteresis	$A_n$ , $B_n$ , PLH <sub>IN</sub> , DIR, HD	3.3	5.0	0.4	0.4	V
		$C_n$	3.3	5.0	0.8	0.8	
		HLH <sub>IN</sub>	3.3	5.0	0.2	0.2	
$V_{OH}$	Minimum HIGH Level Output Voltage	$A_n$ , HLH	3.0	3.0	2.8	2.8	I <sub>OH</sub> = -50 μA
			3.0	3.0	2.4	2.4	
		$B_n$ , Y <sub>n</sub>	3.0	3.0	2.0	2.0	I <sub>OH</sub> = -4 mA
			3.0	4.5	2.23	2.23	
		PLH	3.15	3.15	3.1	3.1	I <sub>OH</sub> = -14 mA
							I <sub>OH</sub> = -500 μA

### DC Electrical Characteristics (Continued)

Symbol	Parameter	$V_{CC}$ (V)	$V_{CC-Cable}$ (V)	$T_A = 0^\circ C$ to $+70^\circ C$	$T_A = -40^\circ C$ to $+85^\circ C$	Units	Conditions
				Guaranteed Limits			
$V_{OL}$	Maximum LOW Level Output Voltage	$A_n$ , HLH	3.0 3.0	3.0 0.4	0.2 0.4	V	$I_{OL} = 50 \mu A$ $I_{OL} = 4 mA$
		$B_n$ , $Y_n$	3.0	3.0	0.8		$I_{OL} = 14 mA$
		$B_n$ , $Y_n$	3.0	4.5	0.77		$I_{OL} = 14 mA$
		PLH	3.0	3.0	0.85		$I_{OL} = 84 mA$
		PLH	3.0	4.5	0.8		$I_{OL} = 84 mA$
$R_D$	Maximum Output Impedance	$B_1 - B_8$ , $Y_9 - Y_{13}$	3.3 3.3	3.3 5.0	60 55	$\Omega$	(Note 5)(Note 7)
		$B_1 - B_8$ , $Y_9 - Y_{13}$	3.3 3.3	3.3 5.0	30 35		(Note 5)(Note 7)
	Minimum Output Impedance	$B_1 - B_8$ , $Y_9 - Y_{13}$	3.3 3.3	3.3 5.0	1150 1150		
		$C_{14} - C_{17}$	3.3 3.3	5.0	1150 1150		
$R_P$	Maximum Pull-Up Resistance	$B_1 - B_8$ , $Y_9 - Y_{13}$ , $C_{14} - C_{17}$	3.3 3.3	3.3 5.0	1650 1650	$\Omega$	
	Minimum Pull-Up Resistance	$B_1 - B_8$ , $Y_9 - Y_{13}$	3.3 3.3	3.3 5.0	1150 1150		
		$C_{14} - C_{17}$	3.3 3.3	5.0	1150 1150		
$I_{IH}$	Maximum Input Current in HIGH State	$A_9 - A_{13}$ , PLH <sub>IN</sub> , HD, DIR, HLH <sub>IN</sub>	3.6	3.6	1.0	$\mu A$	$V_I = 3.6V$
		$C_{14} - C_{17}$	3.6	3.6	50.0		$V_I = 3.6V$
		$C_{14} - C_{17}$	3.6	5.5	100		$V_I = 5.5V$
$I_{IL}$	Maximum Input Current in LOW State	$A_9 - A_{13}$ , PLH <sub>IN</sub> , HD, DIR, HLH <sub>IN</sub>	3.6	3.6	-1.0	$\mu A$	$V_I = 0.0V$
		$C_{14} - C_{17}$	3.6	3.6	-3.5		$V_I = 0.0V$
		$C_{14} - C_{17}$	3.6	5.5	-5.0		$V_I = 0.0V$
$I_{OZH}$	Maximum Output Disable Current (HIGH)	$A_1 - A_8$	3.6	3.6	20	$\mu A$	$V_O = 3.6V$
		$B_1 - B_8$	3.6	3.6	50		$V_O = 3.6V$
		$B_1 - B_8$	3.6	5.5	100		$V_O = 5.5V$
$I_{OZL}$	Maximum Output Disable Current (LOW)	$A_1 - A_8$	3.6	3.6	-20	$\mu A$	$V_O = 0.0V$
		$B_1 - B_8$	3.6	3.6	-3.5		$V_O = 0.0V$
		$B_1 - B_8$	3.6	5.5	-5.0		$V_O = 0.0V$
$I_{OZPU}$	Maximum Power-Up Disable Current	$Y_9 - Y_{13}$	0 to 1.5	0 to 1.5	350	$\mu A$	$V_O = 5.5V$
		$B_1 - B_8$	(Note 8)	(Note 8)	-5		$V_O = 0.0V$
$I_{OZPD}$	Maximum Power-Down Disable Current	$Y_9 - Y_{13}$	0 to 1.5	0 to 1.5	350	$\mu A$	$V_O = 5.5V$
		$B_1 - B_8$	(Note 8)	(Note 8)	-5		$V_O = 0.0V$
$I_{OFF}$	Power Down Output Leakage	$B_1 - B_8$ , $Y_9 - Y_{13}$ , PLH	0.0	0.0	100	100	$\mu A$
$I_{OFF}$	Power Down Input Leakage	$C_{14} - C_{17}$ , HLH <sub>IN</sub>	0.0	0.0	100	100	$\mu A$
$I_{OFF-ICC}$	Power Down Leakage to $V_{CC}$		0.0	0.0	250	250	$\mu A$
$I_{OFF-ICC2}$	Power Down Leakage to $V_{CC-Cable}$		0.0	0.0	250	250	$\mu A$
$I_{CC}$	Maximum Supply Current		3.6	3.6	45	mA	$V_I = V_{CC}$ or GND
			3.6	5.5	70		$V_I = V_{CC}$ or GND

Note 5: Output impedance is measured with the output active LOW and active HIGH (HD = HIGH).

Note 6: Power-down leakage to  $V_{CC}$  or  $V_{CC-Cable}$  is tested by simultaneously forcing all pins on the cable-side ( $B_1 - B_8$ ,  $Y_9 - Y_{13}$ , PLH,  $C_{14} - C_{17}$  and HLH<sub>IN</sub>) to 5.5V and measuring the resulting  $I_{CC}$  or  $I_{CC-Cable}$ .

Note 7: This parameter is guaranteed but not tested, characterized only.

Note 8: Connect all  $V_{CC}$  pins and  $V_{CC-Cable}$  pins when forcing voltage applied, DIR = HD = 0V.

## AC Electrical Characteristics

Symbol	Parameter	$T_A = 0^\circ\text{C}$ to $+70^\circ\text{C}$		$T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$		Units	Figure Number		
		$V_{CC} = 3.0\text{V}\text{--}3.6\text{V}$		$V_{CC} = 3.0\text{V}\text{--}3.6\text{V}$					
		Min	Max	Min	Max				
$t_{PHL}$	A <sub>1</sub> -A <sub>8</sub> to B <sub>1</sub> -B <sub>8</sub>	2.0	40.0	2.0	44.0	ns	Figure 2		
$t_{PLH}$	A <sub>1</sub> -A <sub>8</sub> to B <sub>1</sub> -B <sub>8</sub>	2.0	40.0	2.0	44.0	ns	Figure 3		
$t_{PHL}$	B <sub>1</sub> -B <sub>8</sub> to A <sub>1</sub> -A <sub>8</sub>	2.0	40.0	2.0	44.0	ns	Figure 4		
$t_{PLH}$	B <sub>1</sub> -B <sub>8</sub> to A <sub>1</sub> -A <sub>8</sub>	2.0	40.0	2.0	44.0	ns	Figure 4		
$t_{PHL}$	A <sub>9</sub> -A <sub>13</sub> to Y <sub>9</sub> -Y <sub>13</sub>	2.0	40.0	2.0	44.0	ns	Figure 2		
$t_{PLH}$	A <sub>9</sub> -A <sub>13</sub> to Y <sub>9</sub> -Y <sub>13</sub>	2.0	40.0	2.0	44.0	ns	Figure 3		
$t_{PHL}$	C <sub>14</sub> -C <sub>17</sub> to A <sub>14</sub> -A <sub>17</sub>	2.0	40.0	2.0	44.0	ns	Figure 4		
$t_{PLH}$	C <sub>14</sub> -C <sub>17</sub> to A <sub>14</sub> -A <sub>17</sub>	2.0	40.0	2.0	44.0	ns	Figure 4		
$t_{SKEW}$	LH-LH or HL-HL		10.0		12.0	ns	(Note 10)		
$t_{PHL}$	PLH <sub>IN</sub> to PLH	2.0	40.0	2.0	44.0	ns	Figure 2		
$t_{PLH}$	PLH <sub>IN</sub> to PLH	2.0	40.0	2.0	44.0	ns	Figure 3		
$t_{PHL}$	HLH <sub>IN</sub> to HLH	2.0	40.0	2.0	44.0	ns	Figure 4		
$t_{PLH}$	HLH <sub>IN</sub> to HLH	2.0	40.0	2.0	44.0	ns	Figure 4		
$t_{PHZ}$	Output Disable Time	2.0	15.0	2.0	18.0				
$t_{PLZ}$	DIR to A <sub>1</sub> -A <sub>8</sub>	2.0	15.0	2.0	18.0	ns	Figure 8		
$t_{PZH}$	Output Enable Time	2.0	50.0	2.0	50.0				
$t_{PZL}$	DIR to A <sub>1</sub> -A <sub>8</sub>	2.0	50.0	2.0	50.0	ns	Figure 9		
$t_{PHZ}$	Output Disable Time	2.0	50.0	2.0	50.0				
$t_{PLZ}$	DIR to B <sub>1</sub> -B <sub>8</sub>	2.0	50.0	2.0	50.0	ns	Figure 10		
$t_{pEN}$	Output Enable Time	2.0	25.0	2.0	28.0				
	HD to B <sub>1</sub> -B <sub>8</sub> , Y <sub>9</sub> -Y <sub>13</sub>	2.0	25.0	2.0	28.0	ns	Figure 3		
$t_{pDIS}$	Output Disable Time	2.0	25.0	2.0	28.0				
	HD to B <sub>1</sub> -B <sub>8</sub> , Y <sub>9</sub> -Y <sub>13</sub>	2.0	25.0	2.0	28.0	ns	Figure 3		
$t_{pEN}$ - $t_{pDIS}$	Output Enable-Output Disable		10.0		12.0	ns			
$t_{SLEW}$	Output Slew Rate								
$t_{PLH}$	B <sub>1</sub> -B <sub>8</sub> , Y <sub>9</sub> -Y <sub>13</sub>	0.05	0.40	0.05	0.40	V/ns	Figure 6		
$t_{PHL}$		0.05	0.40	0.05	0.40		Figure 5		
$t_r$ , $t_f$	$t_{RISE}$ and $t_{FALL}$ B <sub>1</sub> -B <sub>8</sub> (Note 9), Y <sub>9</sub> -Y <sub>13</sub> (Note 9)		120		120	ns	Figure 7 (Note 11)		
			120		120				

Note 9: Open Drain

Note 10:  $t_{SKEW}$  is measured for common edge output transitions and compares the measured propagation delay for a given path type:

- (i) A<sub>1</sub>-A<sub>8</sub> to B<sub>1</sub>-B<sub>8</sub>, A<sub>9</sub>-A<sub>13</sub> to Y<sub>9</sub>-Y<sub>13</sub>
- (ii) B<sub>1</sub>-B<sub>8</sub> to A<sub>1</sub>-A<sub>8</sub>
- (iii) C<sub>14</sub>-C<sub>17</sub> to A<sub>14</sub>-A<sub>17</sub>

Note 11: This parameter is guaranteed but not tested, characterized only.

## Capacitance

Symbol	Parameter	Typ	Units	Conditions
$C_{IN}$	Input Capacitance	3	pF	$V_{CC} = 0.0\text{V}$ (HD, DIR, A <sub>9</sub> -A <sub>13</sub> , C <sub>14</sub> -C <sub>17</sub> , PLH <sub>IN</sub> and HLH <sub>IN</sub> )
$C_{I/O}$ (Note 12)	I/O Pin Capacitance	5	pF	$V_{CC} = 3.3\text{V}$

Note 12:  $C_{I/O}$  is measured at frequency = 1 MHz, per MIL-STD-883B, Method 3012

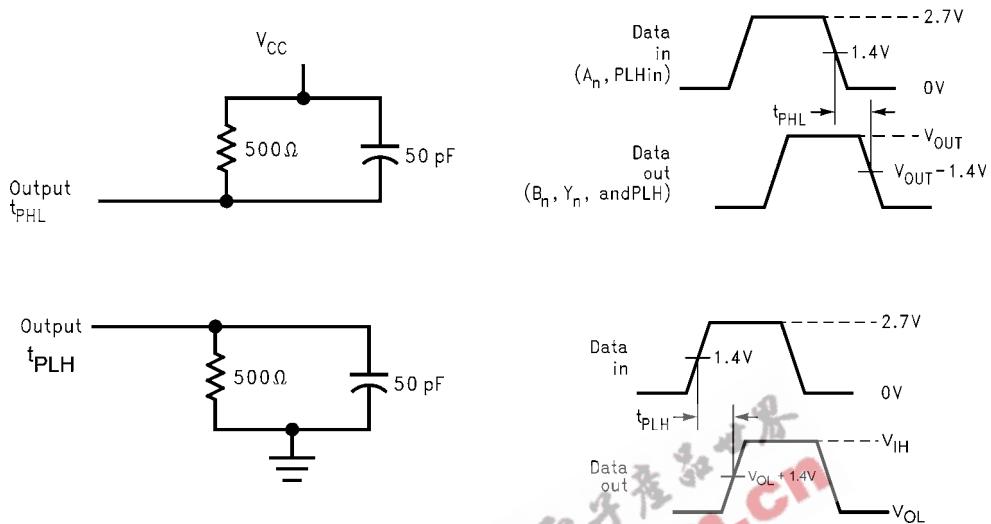
**AC Loading and Waveforms**Pulse Generator for all pulses: Rate  $\leq 1.0$  MHz;  $Z_O \leq 50\Omega$ ;  $t_f \leq 2.5$  ns,  $t_r \leq 2.5$  ns.

FIGURE 2. Port A to B and A to Y Propagation Delay Waveforms

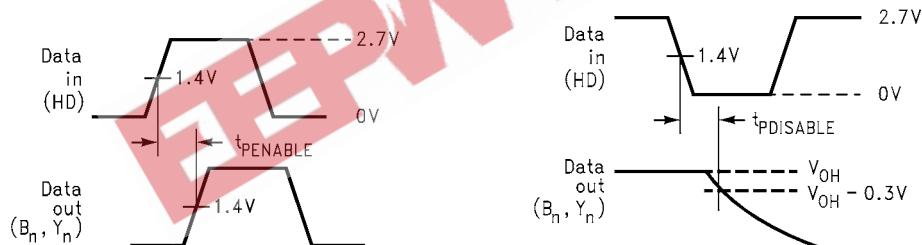


FIGURE 3. Port A to B and A to Y Output Waveforms






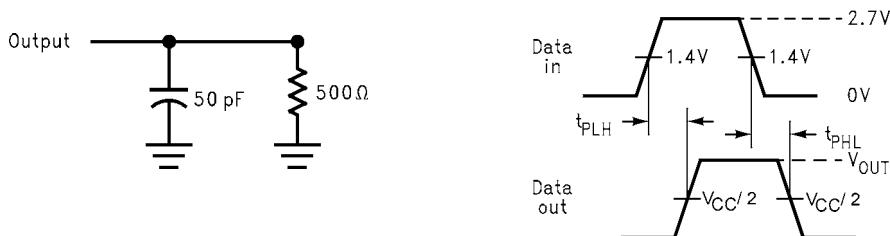


FIGURE 4. Port B to A, C to A and HLHin to HLH Propagation Delay Waveforms

**AC Loading and Waveforms** (Continued)**FIGURE 5. Port A to B and A to Y HL Slew Test Load and Waveforms****FIGURE 6. Port A to B and A to Y LH Slew Test Load and Waveforms**

### AC Loading and Waveforms (Continued)

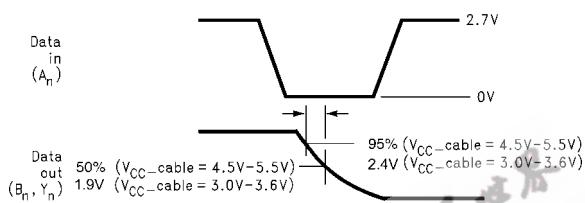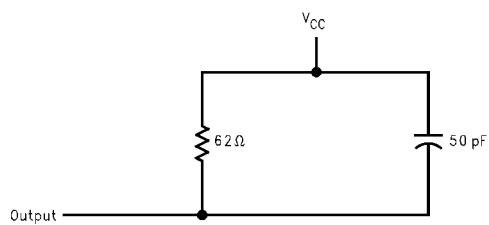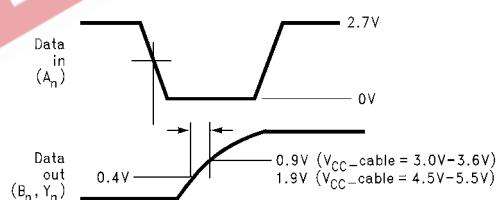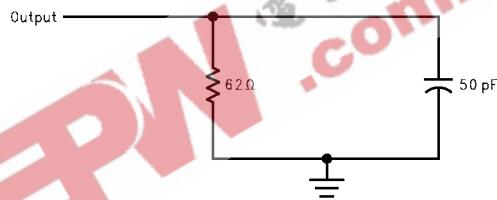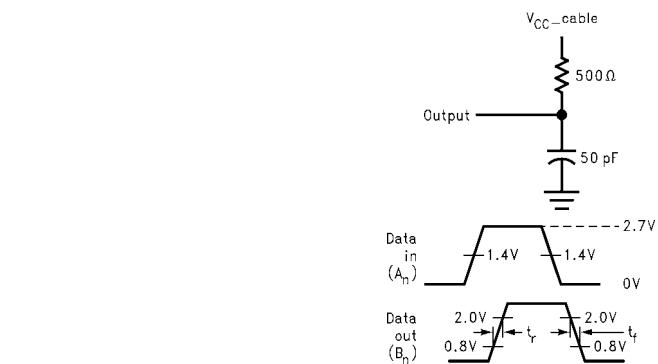

$t_r$  = Output Rise Time, Open Drain

$t_f$  = Output Fall Time, Open Drain

FIGURE 7. Ports A to B and A to Y Rise and Fall Test Load and Waveforms for Open Drain Outputs

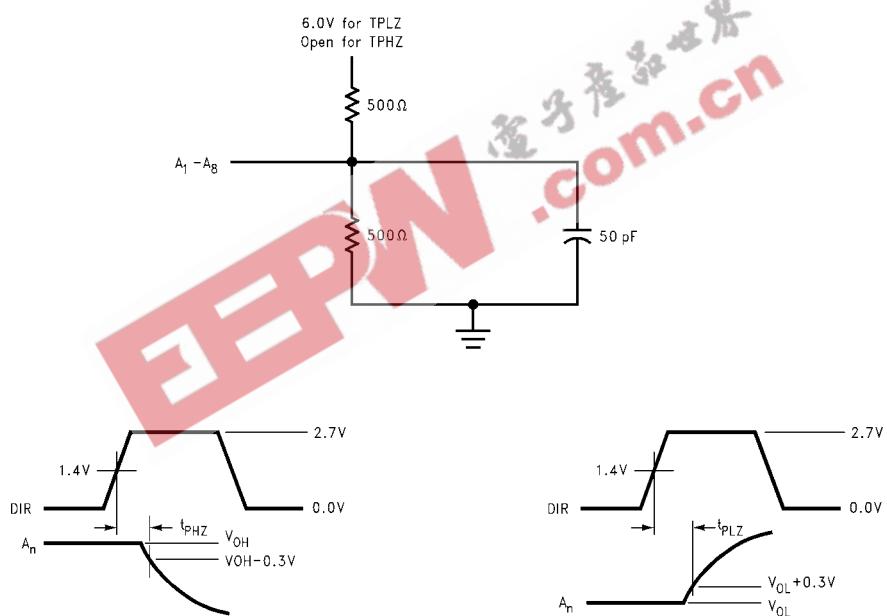
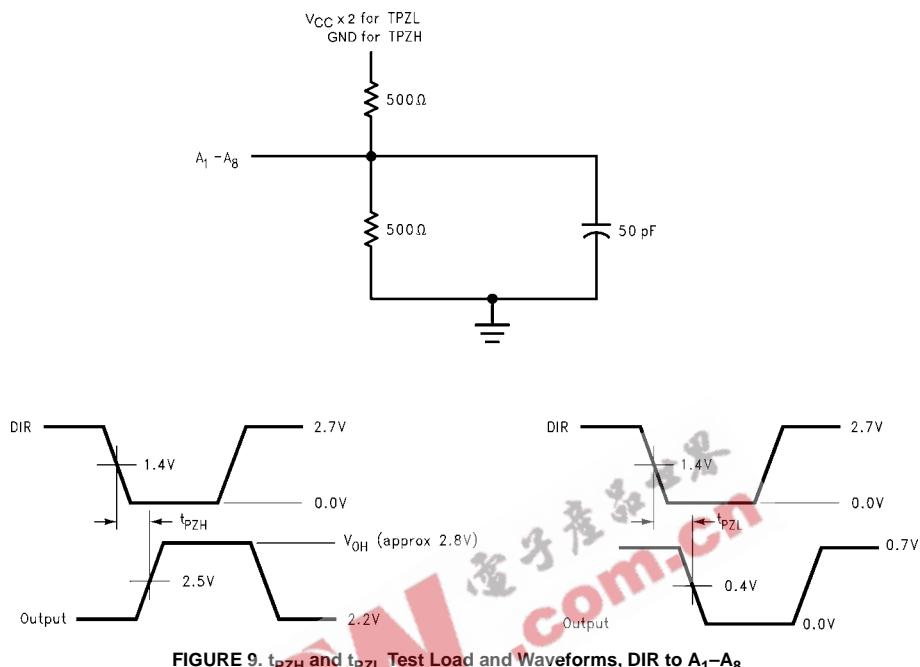
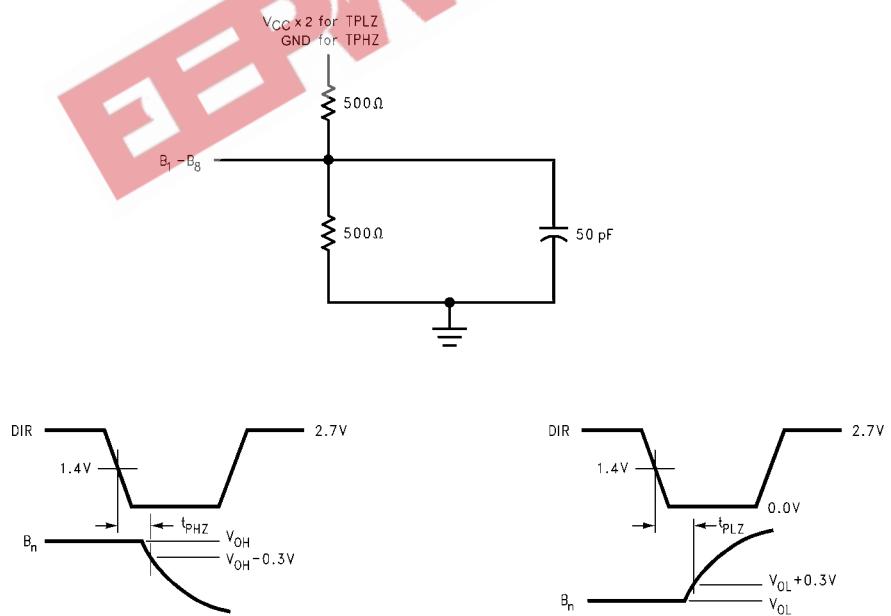


FIGURE 8.  $t_{PHZ}$  and  $t_{PLZ}$  Test Load and Waveforms, DIR to  $A_1 - A_8$

**AC Loading and Waveforms (Continued)****FIGURE 9.  $t_{PZH}$  and  $t_{PZL}$  Test Load and Waveforms,  $DIR$  to  $A_1 - A_8$** **FIGURE 10.  $t_{PHZ}$  and  $t_{PLZ}$  Test Load and Waveforms  
 $DIR$  to  $B_1 - B_8$**

**Physical Dimensions** inches (millimeters) unless otherwise noted