

TECHNICAL DESCRIPTION / APPLICATION

MULTI-MIX[®] FILTERS


Merrimac's FBGI Series bandpass filters combine the features of Merrimac's patented Multi-Mix[®] multilayer fabrication technology with the ability to operate to three times their center frequency without reentrant spurious passbands. They typically offer better overall performance than filters designed to the same specification with conventional filter fabrication techniques.



GENERAL SPECIFICATIONS

FILTER TYPE	CENTER FREQUENCY	1 dB OPERATING BANDWIDTH (MHz MIN)	INSERTION LOSS @ CENTER FREQUENCY	REJECTION	VSWR (MAX)
BANDPASS	5893 MHz Nominal	400	3.5 dB (MAX)	40 dB MIN. @ DC-4900 MHz 50 dB MIN. @ 4900-5243 MHz 50 dB MIN. @ 6603-6900 MHz 40 dB MIN @ 6900-8000 MHz	1.7:1 @ Fc ± 0.1 GHz
SIZE (INCHES)	WEIGHT (GRAMS/OZ.)	RF INTERFACE/CONNECTIONS		OPERATING TEMPERATURE	
1.00 x 0.40 x 0.08	2 / 0.1	SMT		-55° - +85° C	

PACKAGE OUTLINE

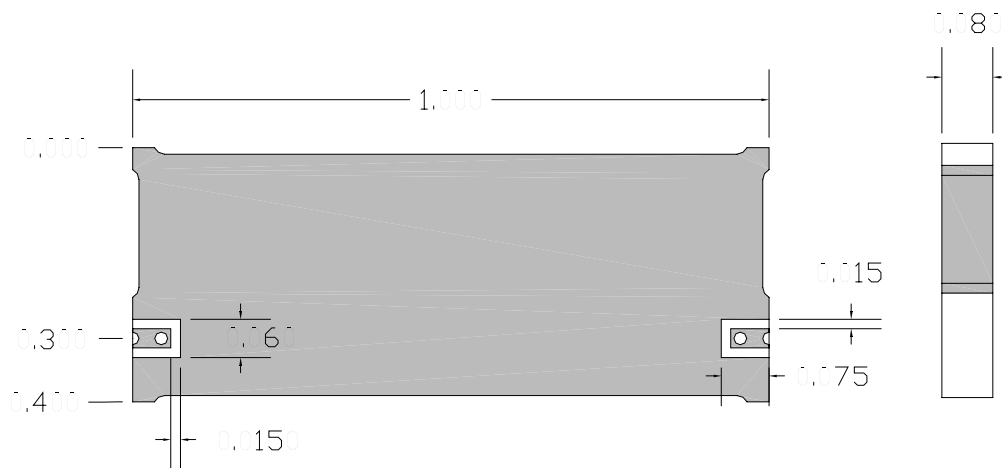

FBGI-5.89G

- NOTES:
1. ALL DIMENSIONS ARE IN INCHES.
2. TOLERANCES: -3 PLACE DECIMALS; ±.005.



THE MULTI-MIX MICROTECHNOLOGY[®] GROUP IS ISO 9001:2000 REGISTERED



U.S. patent 6,099,677 and other patents pending.

TYPICAL PERFORMANCE

FBGI-5.89G

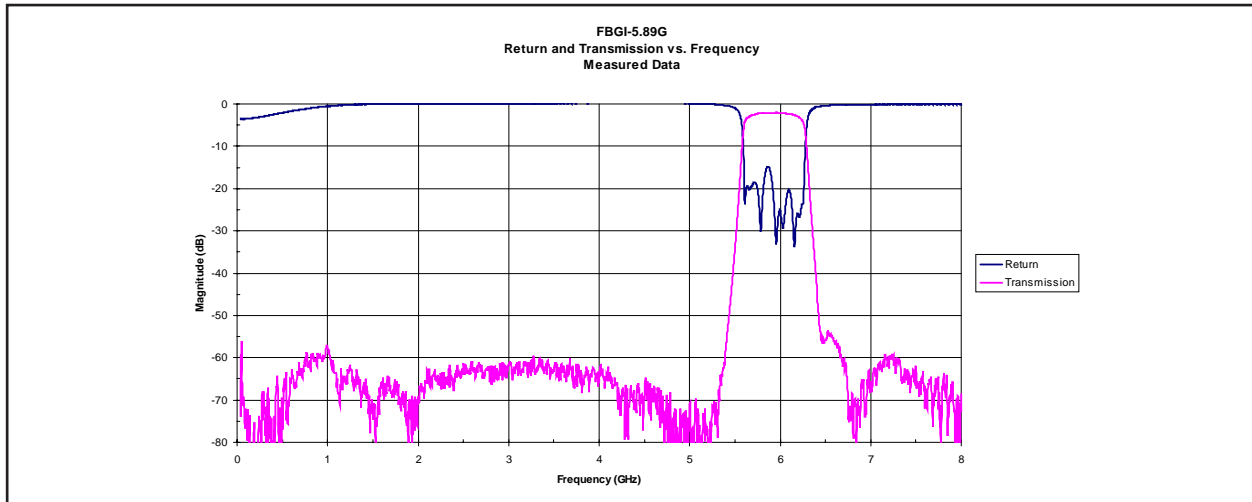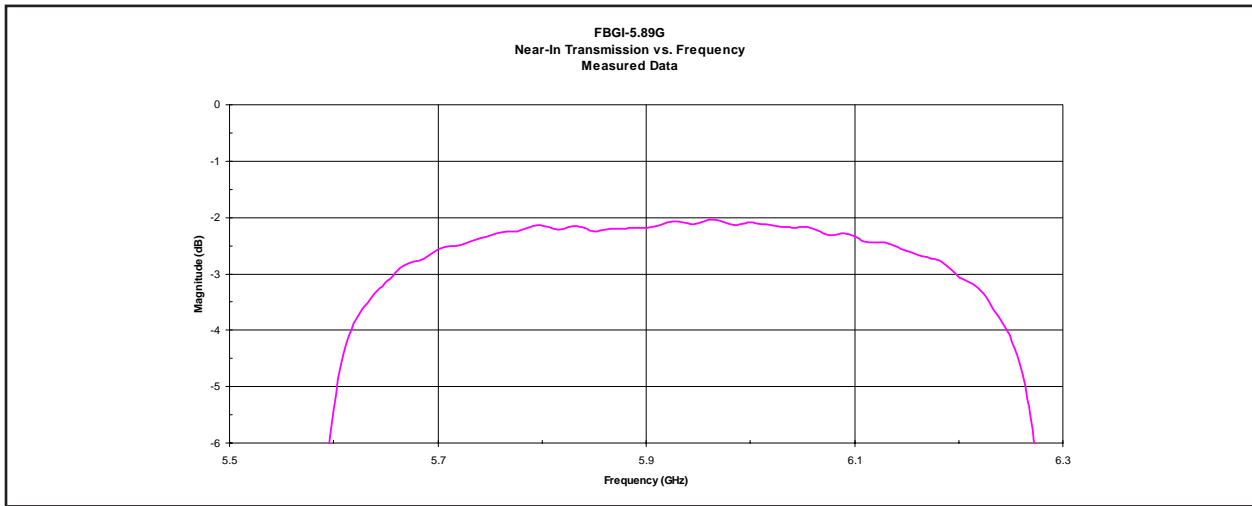

THE MULTI-MIX MICROTECHNOLOGY® GROUP IS ISO 9001:2000 REGISTERED

Merrimac Industries / 41 Fairfield Place, West Caldwell, NJ 07006
Tel: 1.888.434.MMFM / Fax: 973.882.5990 / Email: MMFM@merrimacind.com / www.Multi-Mix.com