

MS-214-3

Miniature Reed Sensor



Electrical Characteristics

Contact form		A
Contact rating max.	W / VA	10
Switching current max.	A	0.7
Carry current max.	A	1.0
Switching voltage max.	VDC	180
	VAC	130
Breakdown voltage min.	VDC	200
Contact resistance (initial) max.	mΩ	100
Insulation resistance min.	Ω	10 ⁹
Capacitance typ.	pF	0.5

Magnetical Characteristics

Pull in range available ¹	AT	10-25
---	----	-------


¹ AT range stated for **unmodified** Reed Switch

Operating Characteristics

Operate time (incl. bounce) max.	ms	0.5
Release time max.	ms	0.3
Switching frequency max.	Hz	500
Resonant frequency typ.	Hz	5,000
Vibration (50-2000 Hz)	g	20
Shock (1/2 sin 11 ms)	g	50
Operating temperature	°C	-40 to +85

Dimensions

in mm

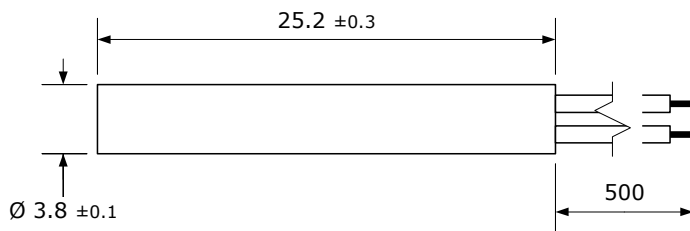

Wire: AWG 26, black, stripped and tinned

Ordering Information

Series	AT Range
MS-214-3	1 = 10-15 / 2 = 15-20 / 3 = 20-25

Ordering example: MS-214-3-2 describes MS-214-3 with 15-20 AT

Customized types available.