


BZX 55... SILICON PLANAR ZENER DIODES

Silicon Planar Zener Diodes

The Zener voltages are graded according to the international E 24 standard. Other voltage tolerances and higher Zener voltages on request.

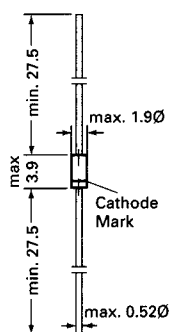

Glass case JEDEC DO-35

Dimensions in mm

Absolute Maximum Ratings ($T_a = 25\text{ }^\circ\text{C}$)


| | Symbol | Value | Unit |
|---|-----------|-------------------|------------------|
| Zener Current see Table " Characteristics " | | | |
| Power Dissipation at $T_{amb} = 25\text{ }^\circ\text{C}$ | P_{tot} | 500 ¹⁾ | mW |
| Junction Temperature | T_j | 175 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -55 to + 175 | $^\circ\text{C}$ |

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

Characteristics at $T_{amb} = 25\text{ }^\circ\text{C}$

| | Symbol | Min. | Typ | Max | Unit |
|---|-----------|------|-----|-------------------|------|
| Thermal Resistance Junction to Ambient Air | R_{thA} | - | - | 0.3 ¹⁾ | K/mW |
| Forward Voltage at $I_F = 100\text{ mA}$ | V_F | - | - | 1 | V |

¹⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.



SEMTECH ELECTRONICS LTD.
(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)




BZX 55 ... SILICON PLANAR ZENER DIODES

| Type | Zener Voltage range ¹⁾ | | | Dynamic resistance | | | Reverse leakage current | | | Temp. coefficient of Zener Voltage |
|------------------------------|-----------------------------------|---|---------------|--------------------|-------------------------------------|------|-------------------------|-----------------------|----------------------------------|------------------------------------|
| | V _{Znom} V | I _{ZT} for V _{ZT} ²⁾ | | r _{zIT} | r _{zJK} at I _{ZK} | | T _a =25°C | T _a =125°C | I _R at V _R | TK _{VZ} |
| | | mA | V | Ω | Ω | mA | μA | μA | V | %/K |
| BZX 55/C 0 V 8 ³⁾ | 0.8 | 5 | 0.73 ... 0.83 | <8 | <50 | 1 | -- | -- | -- | -0.26 ... -0.23 |
| BZX 55/C 2 V 0 | 2.0 | 5 | 1.9 ... 2.1 | <85 | <600 | 1 | <100 | <200 | 1 | -0.09 ... -0.06 |
| BZX 55/C 2 V 2 | 2.2 | 5 | 2.08 ... 2.33 | <85 | <600 | 1 | <75 | <160 | 1 | -0.09 ... -0.06 |
| BZX 55/C 2 V 4 | 2.4 | 5 | 2.28 ... 2.56 | <85 | <600 | 1 | <50 | <100 | 1 | -0.09 ... -0.06 |
| BZX 55/C 2 V 7 | 2.7 | 5 | 2.5 ... 2.9 | <85 | <600 | 1 | <10 | <50 | 1 | -0.09 ... -0.06 |
| BZX 55/C 3 V 0 | 3.0 | 5 | 2.8 ... 3.2 | <85 | <600 | 1 | <4 | <40 | 1 | -0.08 ... -0.05 |
| BZX 55/C 3 V 3 | 3.3 | 5 | 3.1 ... 3.5 | <85 | <600 | 1 | <2 | <40 | 1 | -0.08 ... -0.05 |
| BZX 55/C 3 V 6 | 3.6 | 5 | 3.4 ... 3.8 | <85 | <600 | 1 | <2 | <40 | 1 | -0.08 ... -0.05 |
| BZX 55/C 3 V 9 | 3.9 | 5 | 3.7 ... 4.1 | <85 | <600 | 1 | <2 | <40 | 1 | -0.08 ... -0.05 |
| BZX 55/C 4 V 3 | 4.3 | 5 | 4.0 ... 4.6 | <75 | <600 | 1 | <1 | <20 | 1 | -0.06 ... -0.03 |
| BZX 55/C 4 V 7 | 4.7 | 5 | 4.4 ... 5.0 | <60 | <600 | 1 | <0.5 | <10 | 1 | -0.05 ... +0.02 |
| BZX 55/C 5 V 1 | 5.1 | 5 | 4.8 ... 5.4 | <35 | <550 | 1 | <0.1 | <2 | 1 | -0.02 ... +0.02 |
| BZX 55/C 5 V 6 | 5.6 | 5 | 5.2 ... 6.0 | <25 | <450 | 1 | <0.1 | <2 | 1 | -0.05 ... +0.05 |
| BZX 55/C 6 V 2 | 6.2 | 5 | 5.8 ... 6.6 | <10 | <200 | 1 | <0.1 | <2 | 2 | 0.03 ... 0.06 |
| BZX 55/C 6 V 8 | 6.8 | 5 | 6.4 ... 7.2 | <8 | <150 | 1 | <0.1 | <2 | 3 | 0.03 ... 0.07 |
| BZX 55/C 7 V 5 | 7.5 | 5 | 7.0 ... 7.9 | <7 | <50 | 1 | <0.1 | <2 | 5 | 0.03 ... 0.07 |
| BZX 55/C 8 V 2 | 8.2 | 5 | 7.7 ... 8.7 | <7 | <50 | 1 | <0.1 | <2 | 6.2 | 0.03 ... 0.08 |
| BZX 55/C 9 V 1 | 9.1 | 5 | 8.5 ... 9.6 | <10 | <50 | 1 | <0.1 | <2 | 6.8 | 0.03 ... 0.09 |
| BZX 55/C 10 | 10 | 5 | 9.4 ... 10.6 | <15 | <70 | 1 | <0.1 | <2 | 7.5 | 0.03 ... 0.1 |
| BZX 55/C 11 | 11 | 5 | 10.4 ... 11.6 | <20 | <70 | 1 | <0.1 | <2 | 8.2 | 0.03 ... 0.11 |
| BZX 55/C 12 | 12 | 5 | 11.4 ... 12.7 | <20 | <90 | 1 | <0.1 | <2 | 9.1 | 0.03 ... 0.11 |
| BZX 55/C 13 | 13 | 5 | 12.4 ... 14.1 | <26 | <110 | 1 | <0.1 | <2 | 10 | 0.03 ... 0.11 |
| BZX 55/C 15 | 15 | 5 | 13.8 ... 15.6 | <30 | <110 | 1 | <0.1 | <2 | 11 | 0.03 ... 0.11 |
| BZX 55/C 16 | 16 | 5 | 15.3 ... 17.1 | <40 | <170 | 1 | <0.1 | <2 | 12 | 0.03 ... 0.11 |
| BZX 55/C 18 | 18 | 5 | 16.8 ... 19.1 | <50 | <170 | 1 | <0.1 | <2 | 13 | 0.03 ... 0.11 |
| BZX 55/C 20 | 20 | 5 | 18.8 ... 21.2 | <55 | <220 | 1 | <0.1 | <2 | 15 | 0.03 ... 0.11 |
| BZX 55/C 22 | 22 | 5 | 20.8 ... 23.3 | <55 | <220 | 1 | <0.1 | <2 | 16 | 0.04 ... 0.12 |
| BZX 55/C 24 | 24 | 5 | 22.8 ... 25.6 | <80 | <220 | 1 | <0.1 | <2 | 18 | 0.04 ... 0.12 |
| BZX 55/C 27 | 27 | 5 | 25.1 ... 28.9 | <80 | <220 | 1 | <0.1 | <2 | 20 | 0.04 ... 0.12 |
| BZX 55/C 30 | 30 | 5 | 28 ... 32 | <80 | <220 | 1 | <0.1 | <2 | 22 | 0.04 ... 0.12 |
| BZX 55/C 33 | 33 | 5 | 31 ... 35 | <80 | <220 | 1 | <0.1 | <2 | 24 | 0.04 ... 0.12 |
| BZX 55/C 36 | 36 | 5 | 34 ... 38 | <80 | <220 | 1 | <0.1 | <2 | 27 | 0.04 ... 0.12 |
| BZX 55/C 39 | 39 | 2.5 | 37 ... 41 | <90 | <500 | 0.5 | <0.1 | <5 | 30 | 0.04 ... 0.12 |
| BZX 55/C 43 | 43 | 2.5 | 40 ... 46 | <90 | <500 | 0.5 | <0.1 | <5 | 33 | 0.04 ... 0.12 |
| BZX 55/C 47 | 47 | 2.5 | 44 ... 50 | <110 | <600 | 0.5 | <0.1 | <5 | 36 | 0.04 ... 0.12 |
| BZX 55/C 51 | 51 | 2.5 | 48 ... 54 | <125 | <700 | 0.5 | <0.1 | <10 | 39 | 0.04 ... 0.12 |
| BZX 55/C 56 | 56 | 2.5 | 52 ... 60 | <135 | <700 | 0.5 | <0.1 | <10 | 43 | 0.04 ... 0.12 |
| BZX 55/C 62 | 62 | 2.5 | 58 ... 66 | <150 | <1000 | 0.5 | <0.1 | <10 | 47 | 0.04 ... 0.12 |
| BZX 55/C 68 | 68 | 2.5 | 64 ... 72 | <200 | <1000 | 0.5 | <0.1 | <10 | 51 | 0.04 ... 0.12 |
| BZX 55/C 75 | 75 | 2.5 | 70 ... 79 | <250 | <1000 | 0.5 | <0.1 | <10 | 56 | 0.04 ... 0.12 |
| BZX 55/C 82 | 82 | 2.5 | 77 ... 87 | <300 | <1500 | 0.25 | <0.1 | <10 | 62 | 0.05 ... 0.12 |
| BZX 55/C 91 | 91 | 1 | 85 ... 96 | <450 | <2000 | 0.1 | <0.1 | <10 | 68 | 0.05 ... 0.12 |
| BZX 55/C 100 | 100 | 1 | 94 ... 106 | <450 | <5000 | 0.1 | <0.1 | <10 | 75 | 0.05 ... 0.12 |
| BZX 55/C 110 | 110 | 1 | 104 ... 116 | <600 | <5000 | 0.1 | <0.1 | <10 | 82 | 0.05 ... 0.12 |
| BZX 55/C 120 | 120 | 1 | 114 ... 127 | <800 | <5500 | 0.1 | <0.1 | <10 | 91 | 0.05 ... 0.12 |
| BZX 55/C 130 | 130 | 1 | 124 ... 141 | <950 | <6000 | 0.1 | <0.1 | <10 | 100 | 0.05 ... 0.12 |
| BZX 55/C 150 | 150 | 1 | 138 ... 156 | <1250 | <6500 | 0.1 | <0.1 | <10 | 110 | 0.05 ... 0.12 |
| BZX 55/C 160 | 160 | 1 | 153 ... 171 | <1400 | <7000 | 0.1 | <0.1 | <10 | 120 | 0.05 ... 0.12 |
| BZX 55/C 180 | 180 | 1 | 168 ... 191 | <1700 | <8500 | 0.1 | <0.1 | <10 | 130 | 0.05 ... 0.12 |
| BZX 55/C 200 | 200 | 1 | 188 ... 212 | <2000 | <10000 | 0.1 | <0.1 | <10 | 150 | 0.05 ... 0.12 |

¹⁾ Tested with pulses t_p = 20 ms.

²⁾ Valid provided that leads are kept at ambient temperature at a distance of 8 mm from case.

³⁾ The BZX55-C0V8 is a silicon diode with operation in forward direction. Hence, the index of all parameters should be "F" instead of "Z". Connect the cathode lead to the negative pole.






SEMTECH ELECTRONICS LTD.

(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)



BZX 55... SILICON PLANAR ZENER DIODES

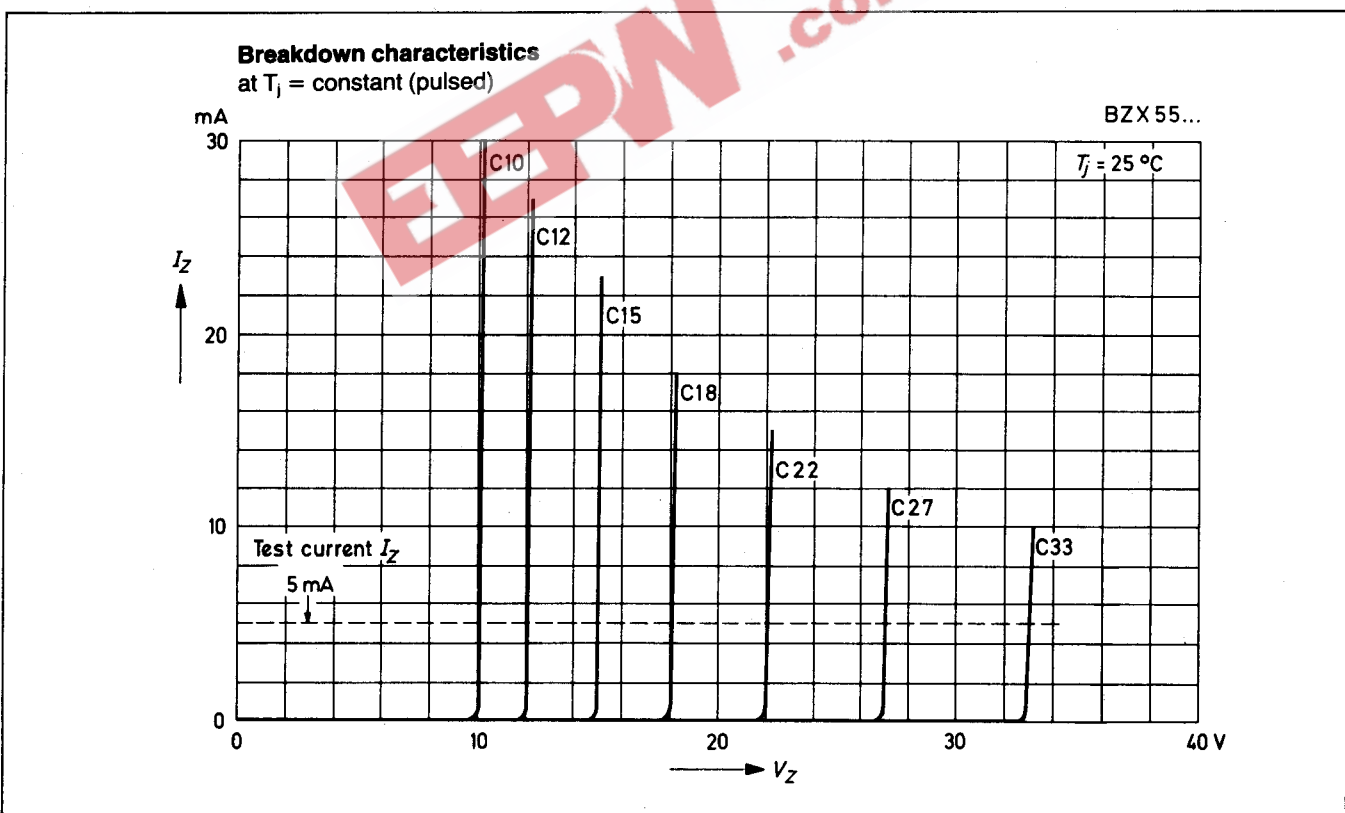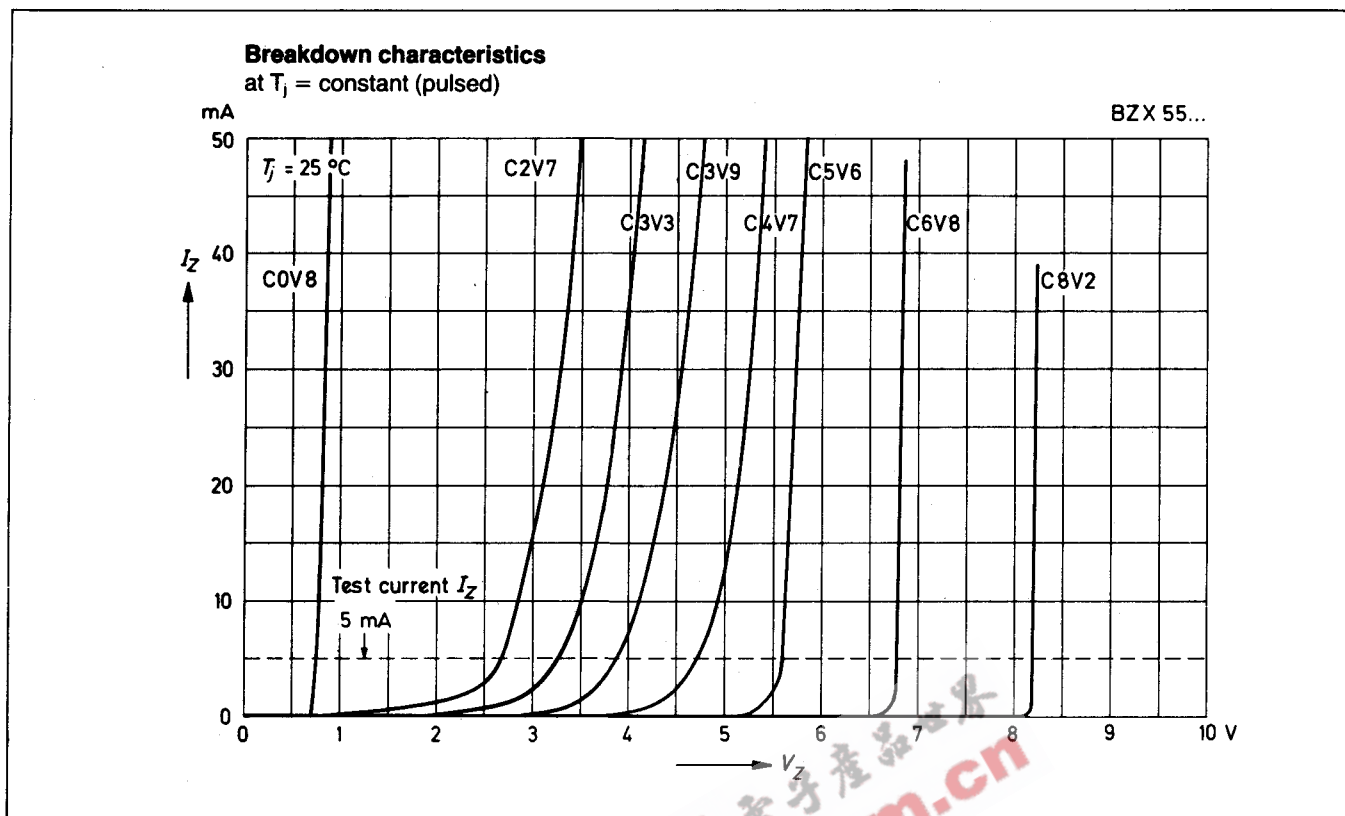

SEMTECH ELECTRONICS LTD.
(wholly owned subsidiary of HONEY TECHNOLOGY LTD.)

