



## Dual Fibre Channel Transformers for 75 Ohm Coaxial & 150 Ohm STP Cable

### Features

- Complies with ANSI X3T9.5, FC-0 over 133, 266 and 531 Mbps data rates for up to 100 meters on coaxial and STP cable
- Fast rise time
- Low profile, light weight SMD packages for pick and place compatibility while providing consistent and reliable coplanarity
- Manufactured in an ISO-9001:2000, TS-16949:2002 and ISO-14001:2004 certified Talema facility
- Fully RoHS compliant and meets lead free reflow level J-STD-020C



### Electrical Specifications

Ratings@ 25°C ambient  
 Minimum Isolation Voltage: 2000Vrms  
 Operating Temperature Range: -10° to +85°C  
 Storage Temperature: -40°C to +125°C




Inductance measured at 100kHz, 20mVrms  
 Standard Packaging: Tape & Reel

### Dual Fibre Channel Transformers



Part Number	OCL (µH Min.)	Turns ratio ±5%	R <sub>CU</sub> P (mOhms)	C <sub>WW</sub> (pF Max)	Rise Time (ns Max) 20-80%	L <sub>L</sub> sec (µH Max)	V <sub>P</sub> (Vrms)
FCJ-7.5	7.5	1 : 1	200	5.0	0.5	0.10	2000
FCJ-15	15	1 : 1	200	5.0	0.8	0.10	2000
FCJ-30	30	1 : 1	200	5.0	1.6	0.10	2000
FCJ-60	60	1 : 1	200	5.5	2.0	0.10	2000

### Dimensions & Schematics

#### Package

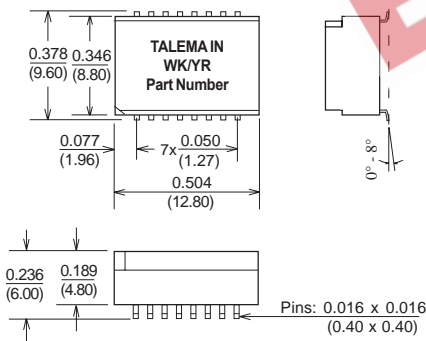

#### Suggested Pad Layout



### Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

#### Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.  
 Chebská 27  
 322 00 Plzeň  
 Tel: Int. + 420 377 - 338 351  
 Fax: Int. + 420 377 - 338 350  
 Email: talema@talema.cz  
 Web Site: www.ntmagnetics.cz

#### Germany

TALEMAELEKTRONIK GMBH  
 Sembdnerstr. 5, Postfach 2523  
 82110 Germering  
 Tel: Int. + 49 89 - 841 00 - 0  
 Fax: Int. + 49 89 - 841 00 25  
 Email: info@talema.de

#### Ireland

NUVOTEM TEO.  
 Crollý  
 Co. Donegal  
 Tel: Int. + 353 74 - 954 8666  
 Fax: Int. + 353 74 - 954 8139  
 Email: info@nuvotem.com

#### India

TALEMA ELECTRONIC PVT. LTD.  
 Opposite the SIDCO Industrial Estate  
 Gins Towers  
 4/5S.H/1, Omalur Main Road  
 Salem - 636 004, Tamil Nadu  
 Tel: Int. + 91 427 - 244 1325  
 Fax: Int. + 91 427 - 243 0034  
 E-mail: talema@talemaindia.com  
 Web Site: www.talemaindia.com