


50Amp Schottky Rectifier FST5060

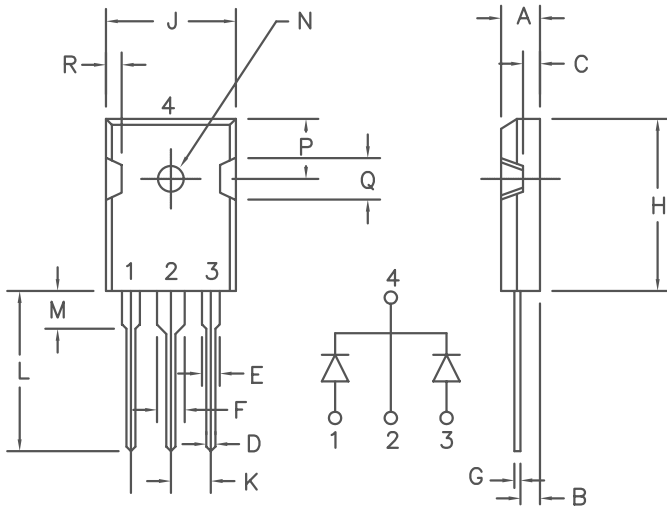

Similar to TO-247AD

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.185	.209	4.70	5.31	
B	.087	.102	2.21	2.59	
C	.059	.098	1.50	2.49	
D	.040	.055	1.02	1.40	
E	.079	.094	2.01	2.39	
F	.118	.133	3.00	3.38	
G	.016	.031	.410	0.78	
H	.819	.883	20.80	22.4	
J	.627	.650	15.93	16.5	
K	.215	—	5.46	—	Typ.
L	.790	.810	20.07	20.6	
M	.157	.180	3.99	4.57	
N	.139	.144	3.53	3.66	Dia.
P	.255	.300	6.48	7.62	
Q	.170	.210	4.32	5.33	
R	.080	.110	2.03	2.79	

Microsemi Catalog
Number

FST5060

Industry
Part Number

MBR5060WT
SBL6060PT

Repetitive Peak
Reverse Voltage

60V

Transient Peak
Reverse Voltage

60V

- Guard ring for reverse protection
- Low power loss, high efficiency
- High surge capacity
- 175°C Junction Temperature
- VRRM 60 Volts

Electrical Characteristics

Average Forward Current per pkg.
Average Forward Current per leg
Maximum Surge Current per leg
Max. Peak Forward Voltage per leg
Max. Peak Reverse Current per leg
Max. Peak Reverse Current per leg
Typical Junction Capacitance per leg

$I_F(AV)$ 50 Amps
 $I_F(AV)$ 25 Amps
 I_{FSM} 400 Amps
 V_{FM} .67 Volts
 I_{RM} 25 mA
 I_{RM} 1.5 mA
 C_J 1200 pF

$T_C = 156^\circ\text{C}$, Square wave, $R_{\theta JC} = 0.5^\circ\text{C/W}$
 $T_C = 156^\circ\text{C}$, Square wave, $R_{\theta JC} = 1.0^\circ\text{C/W}$
8.3ms, half sine
 $I_{FM} = 25\text{A}$, $T_J = 25^\circ\text{C}^*$
 V_{RRM} , $T_J = 125^\circ\text{C}^*$
 V_{RRM} , $T_J = 25^\circ\text{C}$
 $V_R = 5.0\text{V}$, $T_J = 25^\circ\text{C}$

*Pulse test: Pulse width 300 usec. Duty Cycle 2%

Thermal and Mechanical Characteristics

Storage temp range
Operating junction temp range
Max thermal resistance per leg
Max thermal resistance per pkg.
Mounting Torque
Weight

TSTG
 T_J
 $R_{\theta JC}$
 $R_{\theta JC}$

-55°C to $+175^\circ\text{C}$
 -55°C to $+175^\circ\text{C}$
 1.0°C/W
 0.5°C/W
5–10 inch pounds (4–40 screws)
.22 ounces (6.36 grams) typical

FST5060

Figure 1
Typical Forward Characteristics—Per Leg

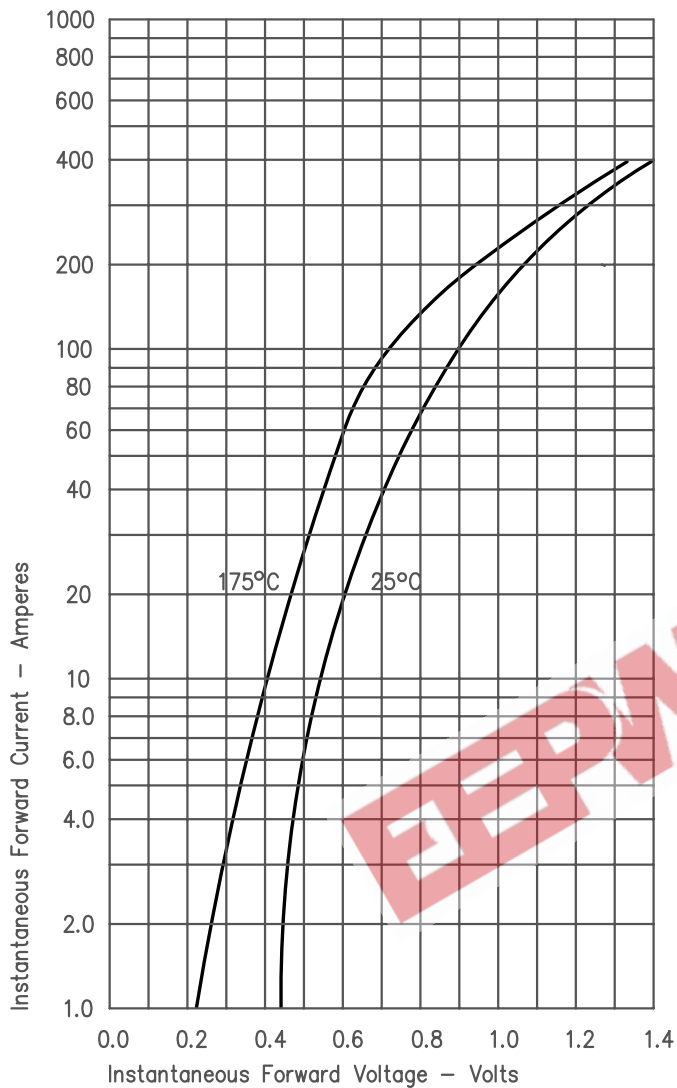


Figure 3
Typical Junction Capacitance—Per Leg

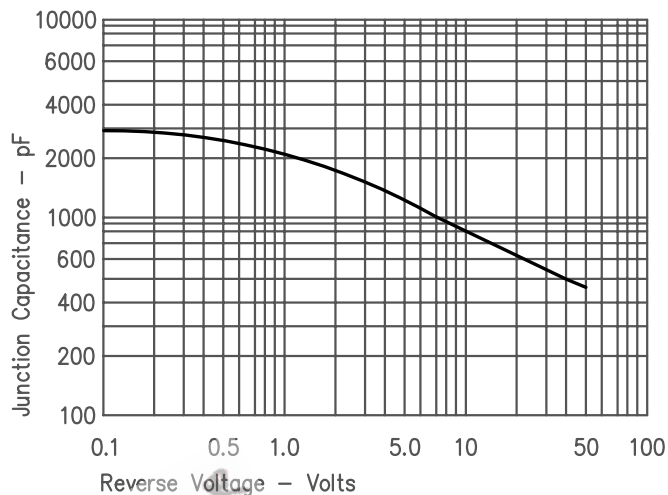


Figure 4
Forward Current Derating—Per Leg

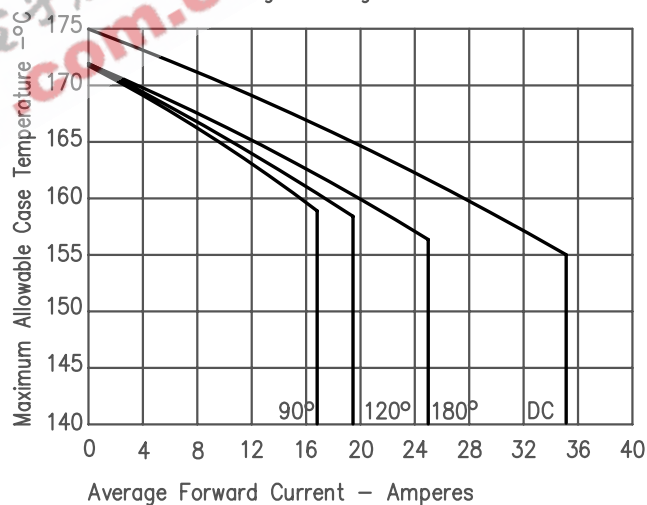


Figure 2
Typical Reverse Characteristics—Per Leg

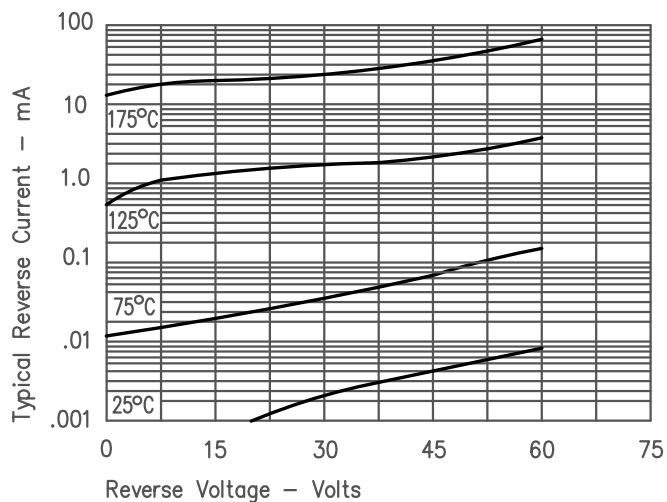


Figure 5
Forward Current Derating—Per Leg

