


PRODUCT SPECIFICATION

DATE : 03/01/2005

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW614H	Preliminary	REV. 0
SHEET 1 OF 10			


● OUTSIDE DIMENSION :

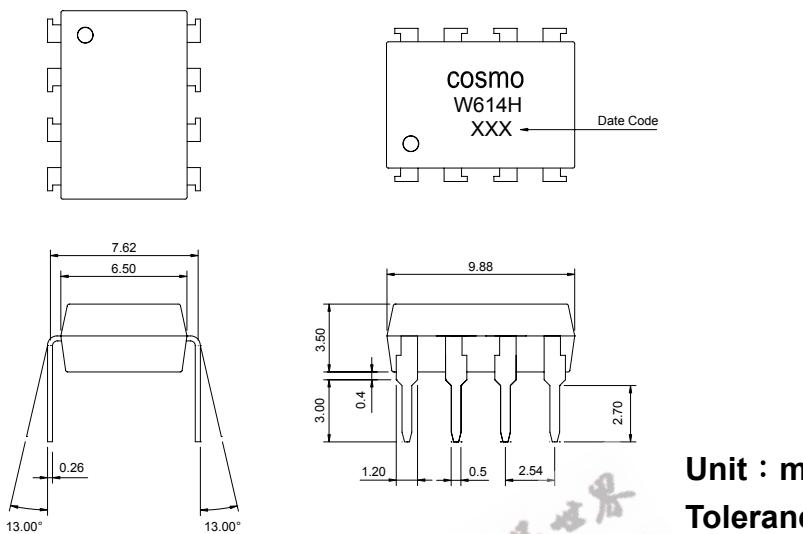


Unit : mm

Tolerance : $\pm 0.2\text{mm}$

● Operate / Reverse time (N.C)

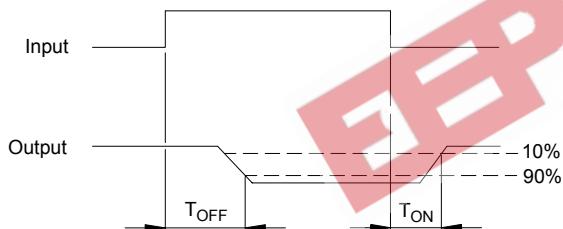

● Turn on / Turn off time (N.O)

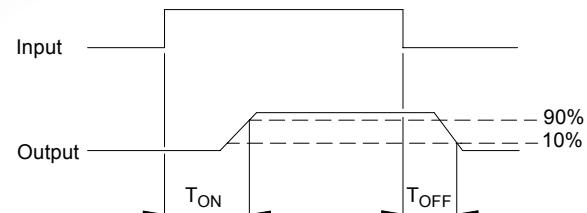

● Schematic and Wiring Diagrams

Schematic	Output Configuration	Load	Connection	Wiring Diagrams
	1a1b 1 FORM A/B 1 FORM C	AC/DC	-	(1) Two independent 1 Form A & 1 Form B use (2) 1 Form A 1 Form B use

PRODUCT SPECIFICATION

DATE : 03/01/2005

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW614H	Preliminary	REV. 0
SHEET 2 OF 10			

● Absolute Maximum Ratings

(Ta=25°C)

Emitter (Input)	Detector (Output)
Reverse Voltage 5.0V	Output Breakdown Voltage ± 400V
Continuous Forward Current 50mA	Continuous Load Current ± 130mA
Peak Forward Current 1A	Power Dissipation 500mW
Power Dissipation 100mW	
Derate Linearly from 25°C 1.3mW/°C	

General Characteristics

Isolation Test Voltage 5000VACrms	Storage Temperature Range -40°C to +125°C
Isolation Resistance Viso=500V, Ta=25°C $\geq 10^{10}\Omega$	Operating Temperature Range ... -40°C to +85°C
Total Power Dissipation 550mW	Junction Temperature 100°C
Derate Linearly from 25°C 2.5mW/°C	Soldering Temperature , 2mm from case , 10 sec 260°C

● Electro-optical Characteristics

(Ta=25°C)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Emitter (Input)						
Forward Voltage	V _F	I _F =10mA		1.2	1.5	V
Operation Input Current	I _{FON} (N.O) I _{FOFF} (N.C)	V _L =±20V, I _L =100mA (N.O) V _L =±20V, I _L ≤5μA (N.C) t=10ms			5	mA
Recovery Input Current	I _{FOFF} (N.O) I _{FON} (N.C)	V _L =±20V, I _L ≤5μA (N.C) V _L =±20V, I _L =100mA (N.O) t=10ms	0.2			mA

Detector (Output) normally open						
Output Breakdown Voltage	V _B	I _B =50μA	400			V
Output Off-State Leakage	I _{TOFF}	V _T =100V, I _F =0mA		0.2	1	μA
I/O Capacitance	C _{ISO}	I _F =0, f=1MHz		6		pF
ON Resistance	R _{ON}	I _L =100mA, I _F =10mA		20	30	Ω
Turn-On Time	T _{ON}	I _F =10mA, V _L =±20V t=10ms, I _L =±100mA		0.3	1.0	ms
Turn-Off Time	T _{OFF}			0.7	1.5	ms

Detector (Output) normally close						
Output Breakdown Voltage	V _B	I _B =50μA, I _F =10mA	400			V
Output Off-State Leakage	I _{TOFF}	V _T =100V, I _F =10mA		0.2	2	μA
I/O Capacitance	C _{ISO}	I _F =0, f=1MHz		6		pF
ON Resistance	R _{ON}	I _L =100mA, I _F =0mA		40	50	Ω
Operate (OFF) Time	T _{OFF}	I _F =10mA, V _L =±20V t=10ms, I _L =±100mA		0.6	1.5	ms
Reverse (ON) Time	T _{ON}			0.3	1.0	ms

PRODUCT SPECIFICATION

DATE : 03/01/2005


cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW614H	Preliminary	REV. 0
		SHEET 3 OF 10	

● Data Curve (Normally Open Characteristics)

Load current vs. ambient temperature

Allowable ambient Temperature :

-40°C to +85°C

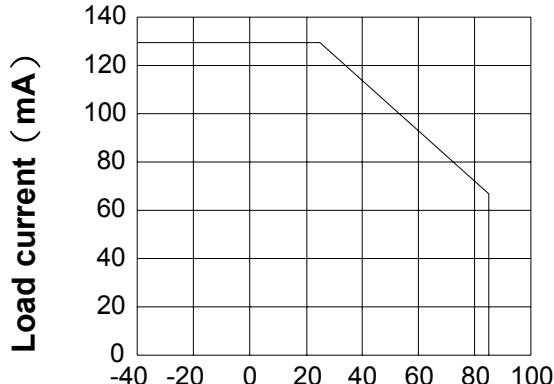


Ambient temperature Ta (°C)

On resistance vs. ambient temperature across terminals 5 and 6 pin

LED current : 5mA

Continuous load current : 130mA (DC)

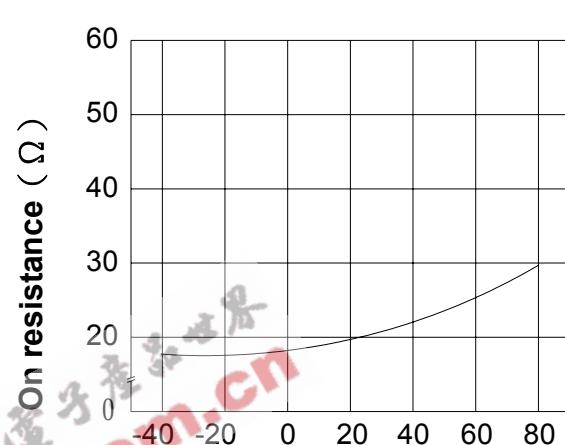


Ambient temperature Ta (°C)

Turn on time vs. ambient temperature

Load voltage 400V (DC)

LED current : 5mA

Continuous load current : 130mA (DC)

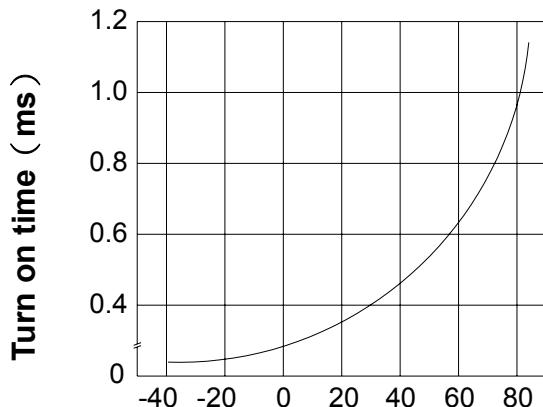


Ambient temperature Ta (°C)

Turn off time vs. ambient temperature

Load voltage 400V (DC)

LED current : 5mA

Continuous load current : 130mA (DC)

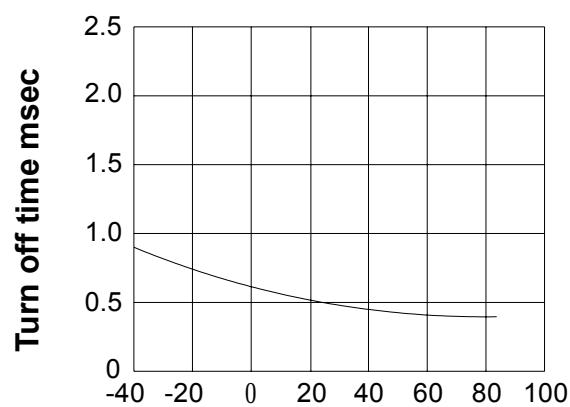


Ambient temperature Ta (°C)

PRODUCT SPECIFICATION


DATE : 03/01/2005

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW614H	Preliminary	REV. 0
		SHEET 4 OF 10	


LED operate current vs.
ambient temperature
Load Voltage : 400V (DC)
Continuous load current : 130mA (DC)

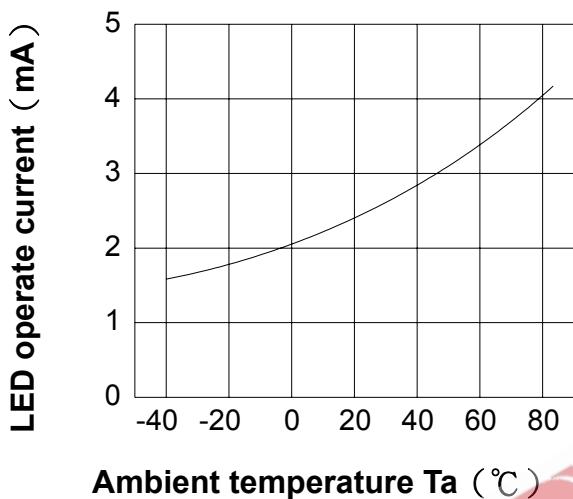


LED Turn Off current vs.
ambient temperature
Load Voltage : 400V (DC)
Continuous load current : 130mA (DC)

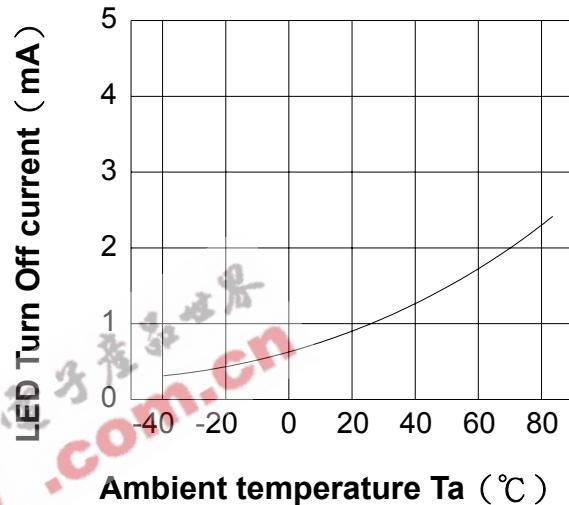

LED dropout voltage vs.
ambient temperature
LED current : 5 to 50mA

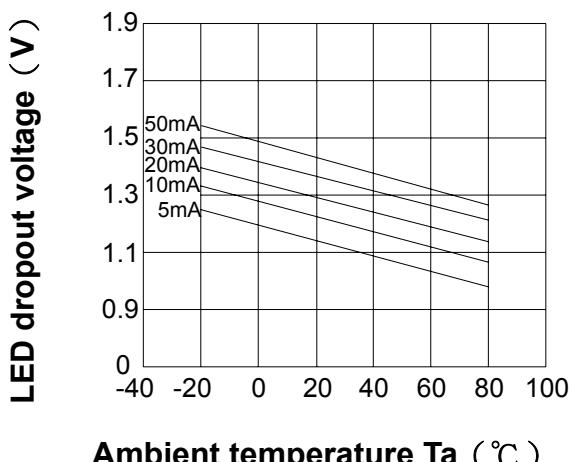

Voltage vs. current characteristics
of output at MOSFET portion
Measured portion : across terminals
5 and 6 pin
Ambient temperature : 25°C

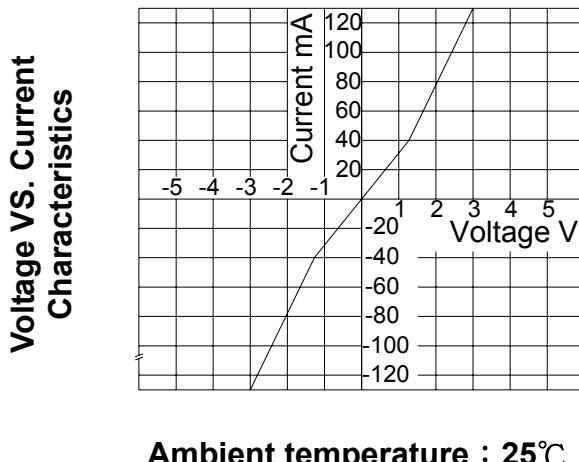

PRODUCT SPECIFICATION

DATE : 03/01/2005

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW614H	Preliminary	REV. 0
		SHEET 5 OF 10	


LED forward current vs. turn on time

Across terminals 5 and 6 pin

Load voltage : 400V (DC)

Continuous load current : 130mA (DC)


Ambient temperature : 25°C

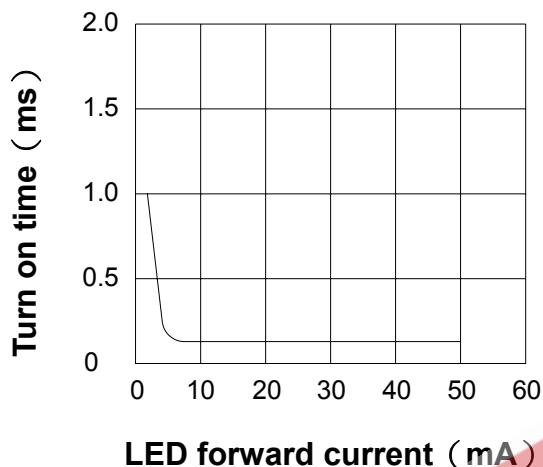

Off state leakage current

Across terminals 5 and 6 pin

Ambient temperature : 25°C

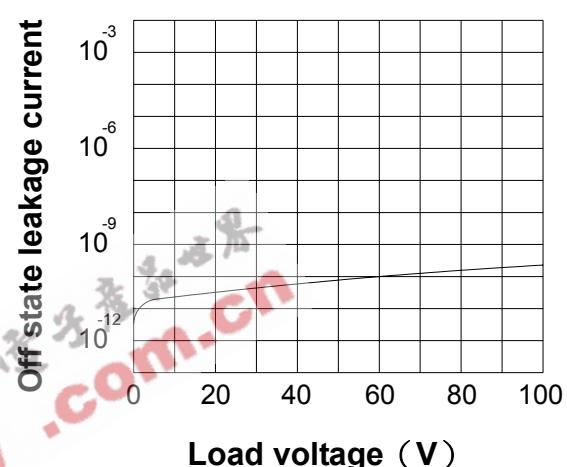


LED forward current vs. turn off time

Across terminals 5 and 6 pin

Load voltage : 400V (DC)

Continuous load current : 130mA (DC)

Ambient temperature : 25°C

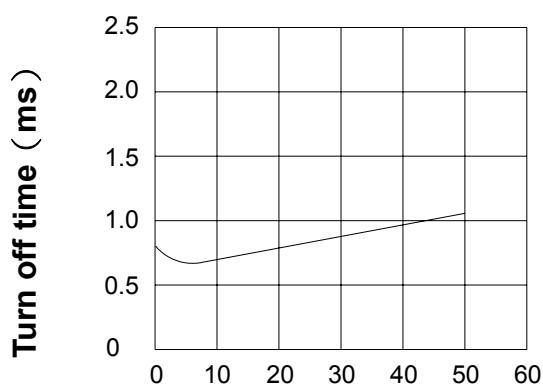


Applied voltage vs. output capacitance

Across terminals 5 and 6 pin

Frequency : 1MHz

Ambient temperature : 25°C

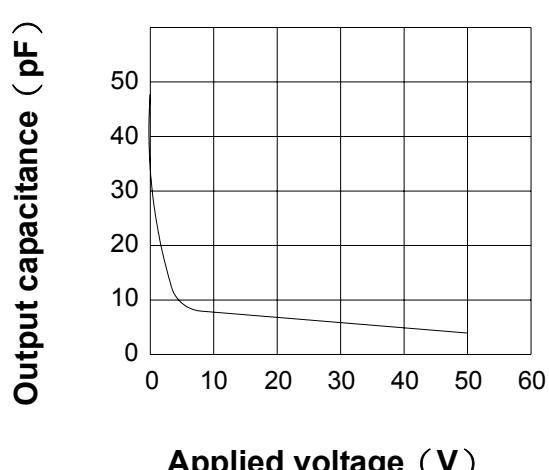

PRODUCT SPECIFICATION

DATE : 03/01/2005

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW614H	Preliminary	REV. 0
		SHEET 6 OF 10	

● Data Curve (Normally Close Characteristics)

Load current vs. ambient temperature

Allowable ambient Temperature :


-40°C to +85°C

On resistance vs. ambient temperature


across terminals 7 and 8 pin

LED current : 0mA

Continuous load current : 130mA (DC)

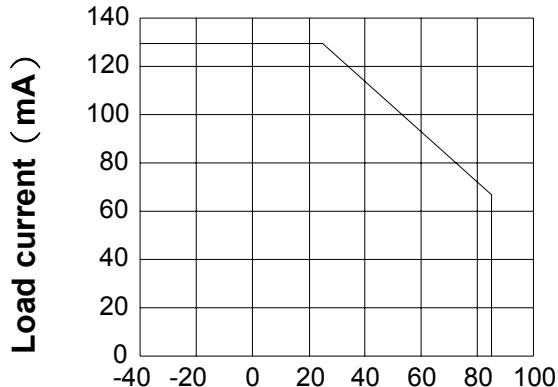


Ambient temperature Ta (°C)

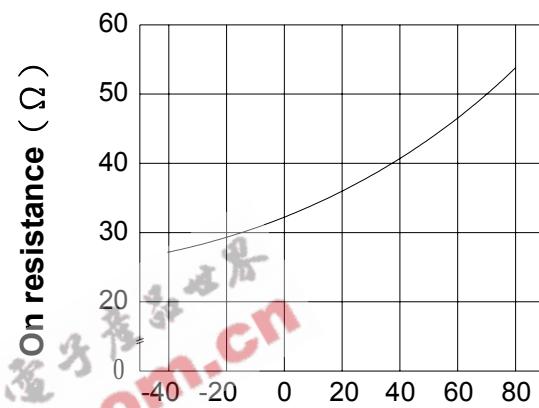


Ambient temperature Ta (°C)

Operate (OFF) time vs.
ambient temperature
Load voltage 400V (DC)
LED current : 5mA
Continuous load current : 130mA (DC)

Reverse (ON) time vs.
ambient temperature
Load voltage 400V (DC)
LED current : 5mA
Continuous load current : 130mA (DC)

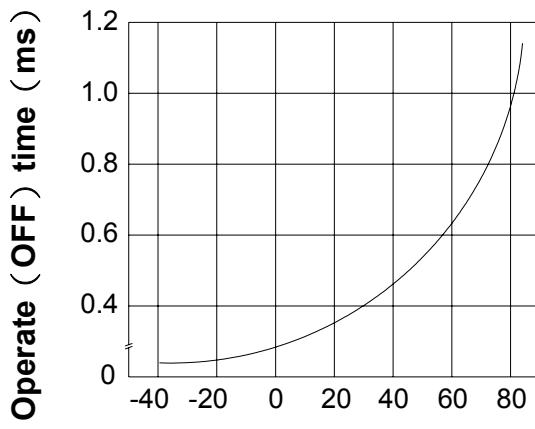

Ambient temperature Ta (°C)

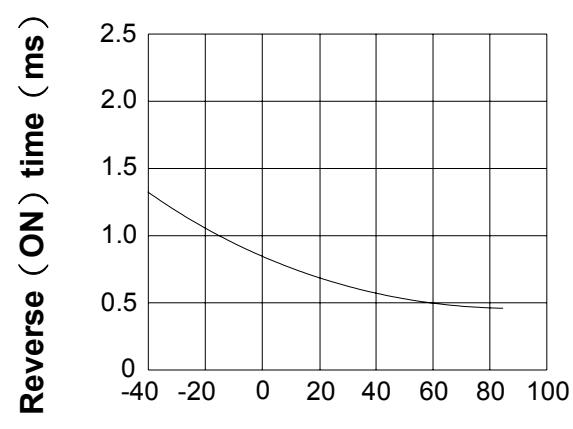


Ambient temperature Ta (°C)

PRODUCT SPECIFICATION


DATE : 03/01/2005

COSMO ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW614H	Preliminary	REV. 0
		SHEET 7 OF 10	


LED Operate (OFF) current vs.
ambient temperature
Load Voltage : 400V (DC)
Continuous load current : 130mA (DC)

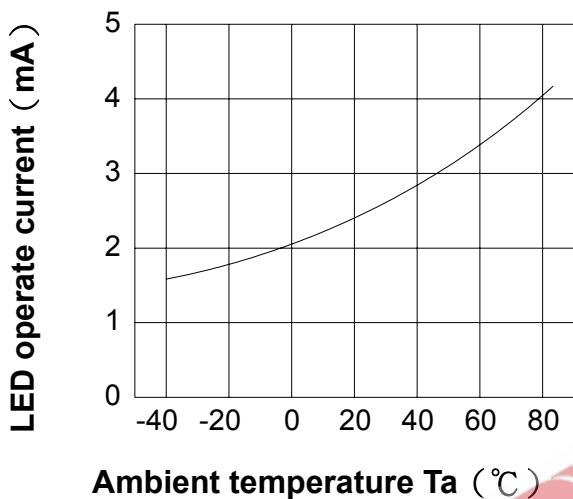


LED Reverse (ON) current vs.
ambient temperature
Load Voltage : 400V (DC)
Continuous load current : 130mA (DC)

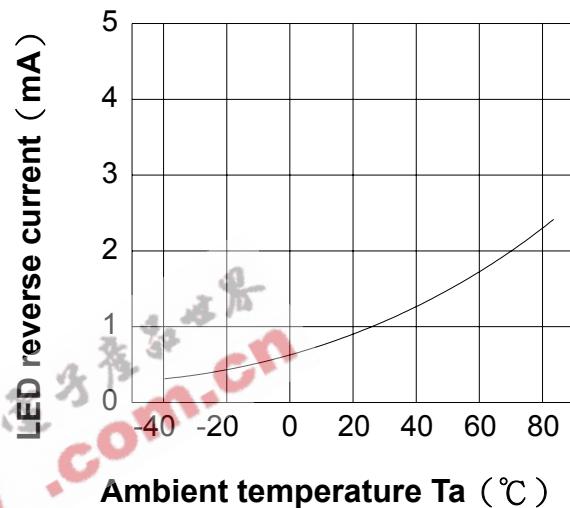

LED dropout voltage vs.
ambient temperature
LED current : 5 to 50mA

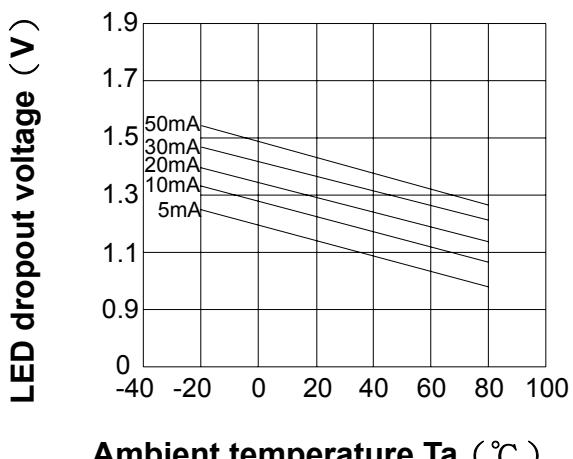

Voltage vs. current characteristics
of output at MOSFET portion
Measured portion : across terminals
7 and 8 pin
Ambient temperature : 25°C

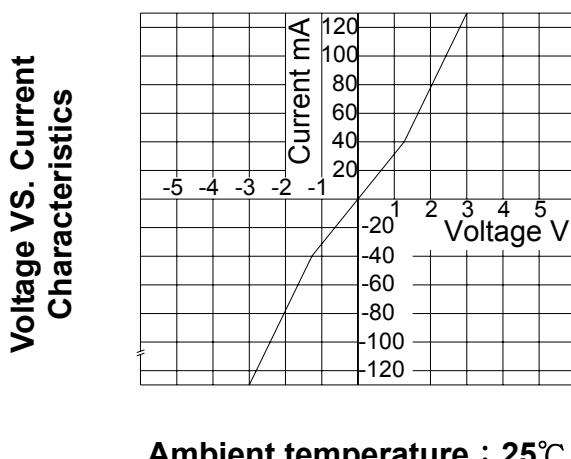

PRODUCT SPECIFICATION

DATE : 03/01/2005

cosmo ELECTRONICS CORPORATION	SOLID STATE RELAY - MOSFET OUTPUT KAQW614H	Preliminary	REV. 0
		SHEET 8 OF 10	


LED forward current vs. operate (OFF) time

Across terminals 7 and 8 pin


Load voltage : 400V (DC)

Continuous load current : 130mA (DC)

Ambient temperature : 25°C

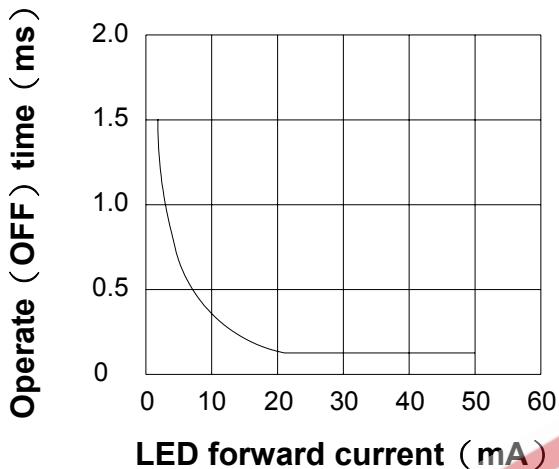

Off state leakage current
Across terminals 7 and 8 pin
Ambient temperature : 25°C

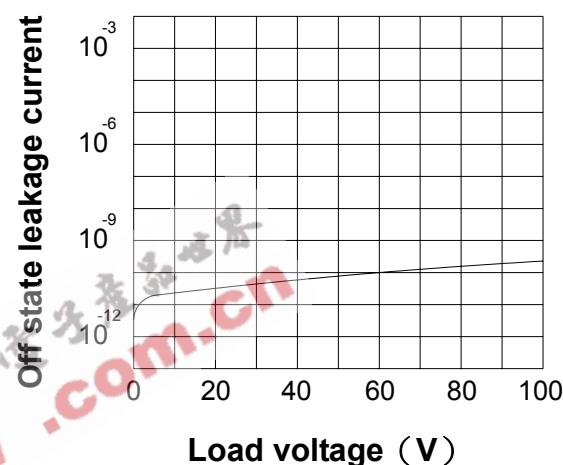


LED forward current vs. reverse (ON) time

Across terminals 7 and 8 pin


Load voltage : 400V (DC)

Continuous load current : 130mA (DC)

Ambient temperature : 25°C

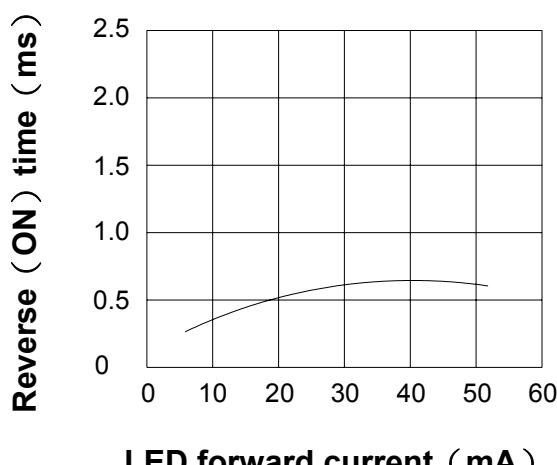

Applied voltage vs. output capacitance
Across terminals 7 and 8 pin
Frequency : 1MHz
Ambient temperature : 25°C

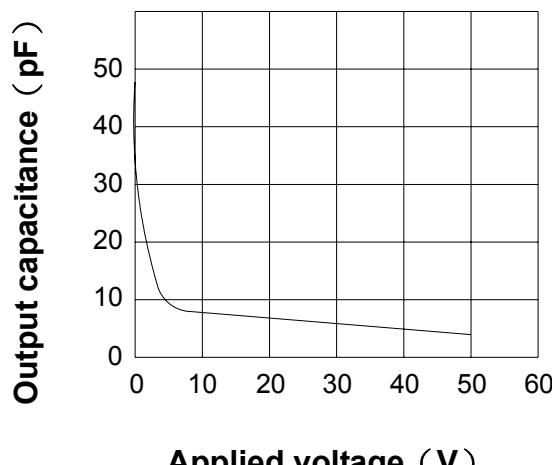

PRODUCT SPECIFICATION

DATE : 03/01/2005

cosmo
ELECTRONICS CORPORATION

SOLID STATE RELAY - MOSFET OUTPUT
KAQW614H

Preliminary
SHEET 9 OF 10


REV.
0

● USING METHODS

Examples of resistance value to control LED forward current (IF)


SSR-MOSFET OUTPUT

(IF=5mA)

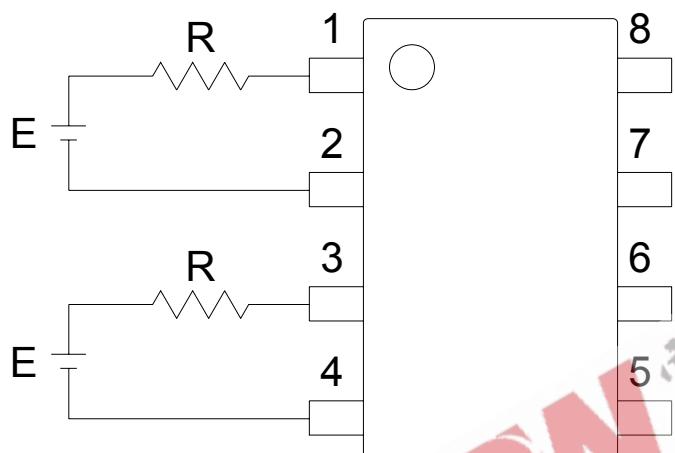

E	R
3.3V	Approx. 330 Ω
5V	Approx. 640 Ω
12V	Approx. 1.9K Ω
15V	Approx. 2.5K Ω
24V	Approx. 4.1K Ω

- (1) LED forward current must be more than 5mA , at E min.
- (2) LED forward current must be less than 50mA , at E max.

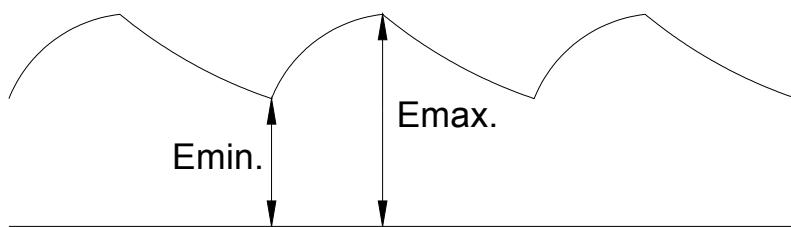

PRODUCT SPECIFICATION

DATE : 03/01/2005

cosmo
ELECTRONICS CORPORATION



SOLID STATE RELAY - MOSFET OUTPUT
KAQW614H

Preliminary
SHEET 10 OF 10

REV.
0

● USING METHODS

Regulate the spike voltage generated on the inductive load as follows :

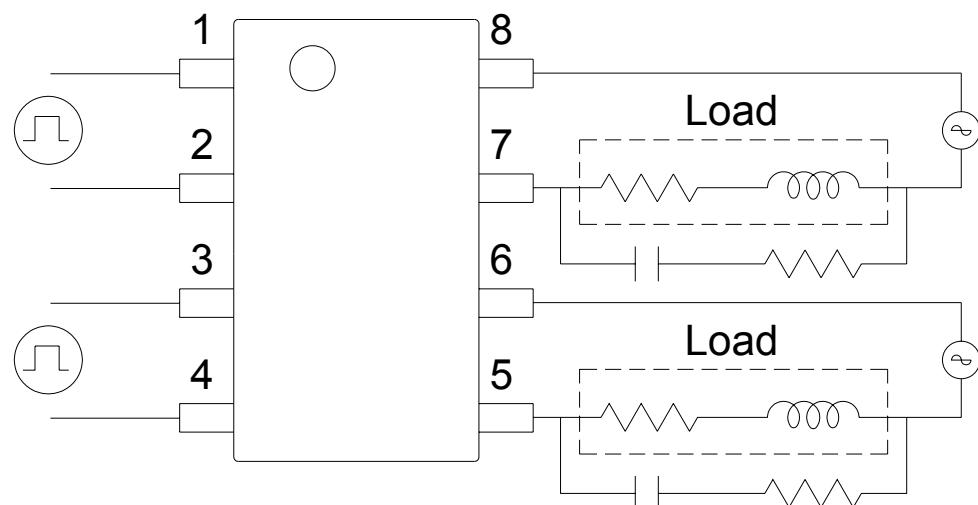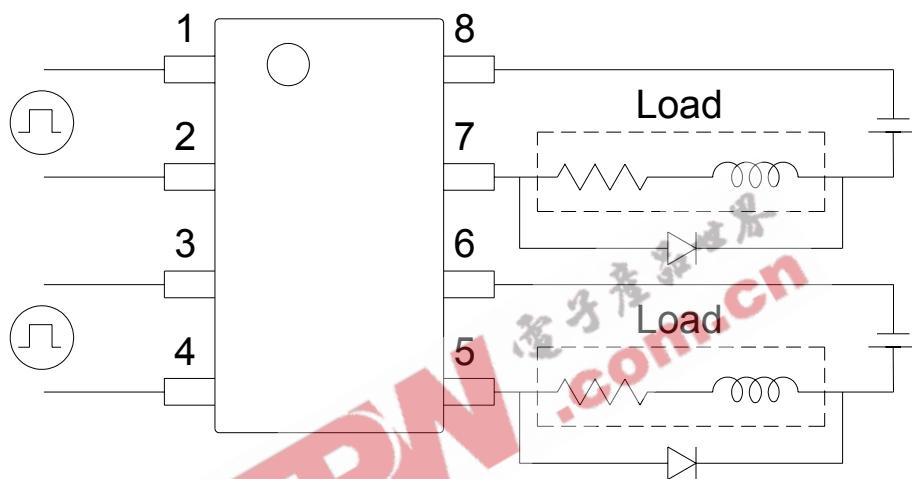

R-C Snubber