



KBL401 THRU KBL407
SINGLE PHASE SILICON
BRIDGE RECTIFIER

TECHNICAL
SPECIFICATION


VOLTAGE: 50 TO 1000V CURRENT: 4.0A

FEATURES

- Ideal for printed circuit board
- Surge overload rating: 200 A peak
- High case dielectric strength
- High temperature soldering guaranteed:
 250°C/10sec/0.375"(9.5mm) lead length
 at 5 lbs tension

MECHANICAL DATA

- Terminal: Plated leads solderable per
 MIL-STD 202E, method 208C
- Case: UL-94 Class V-O recognized flame
 retardant epoxy
- Polarity: Polarity symbol marked on body
- Mounting position: Any

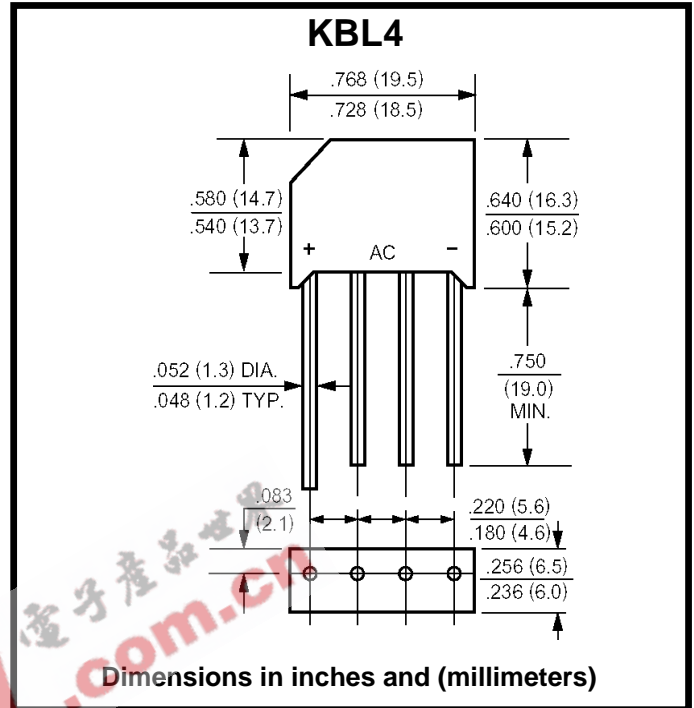

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60Hz, resistive or inductive load rating at 25°C, unless otherwise stated, for capacitive load, derate current by 20%)

RATINGS	SYMBOL	KBL 401	KBL 402	KBL 403	KBL 404	KBL 405	KBL 406	KBL 407	UNITS
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current ($T_a=50^\circ\text{C}$)	$I_{F(AV)}$	4.0							A
Peak Forward Surge Current (8.3ms single half sine-wave superimposed on rated load)	I_{FSM}	200							A
Maximum Instantaneous Forward Voltage (at forward current 4.0A DC)	V_F	1.1							V
Maximum DC Reverse Current (at rated DC blocking voltage)	I_R	$T_a=25^\circ\text{C}$ 10.0							μA
		$T_a=100^\circ\text{C}$ 500							μA
Operating Temperature Range	T_J	-55 to +125							$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 to +150							$^\circ\text{C}$