



KBPC15, 25, 35 SERIES
HIGH CURRENT 15, 25, 35 AMPS SINGLE PHASE
GLASS PASSIVATED BRIDGE RECTIFIERS




VOLTAGE RANGE
 50 to 1000 Volts
CURRENT
 15.0/25.0/35.0 Amperes

FEATURES

- * Metal case with an electrically isolated mylar
- * Rating to 1,000V PRV
- * High efficiency
- * Mounting: thru hole for # 10 screw
- * High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs., (2.3 kg) tension
- * Terminals solderables per MIL – STD – 202. method 208
- * Isolated voltage from case to lead over 2000 volts

KBPC-W

KBPC

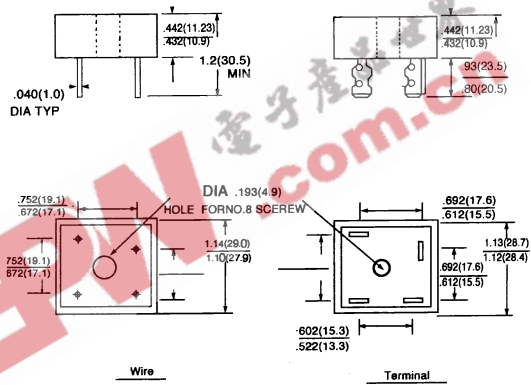

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.
 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

TYPE NUMBER	SYMBOLS	-00G	-01G	-02G	-04G	-06G	-08G	-10G	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum D. C Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current @ $T_C = 55^\circ C$ (See Fig. 1)	$I_{F(AV)}$					15.0			A
						25.0			
						35.0			
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	I_{FSM}					200			A
						300			
						400			
Maximum Instantaneous Forward Voltage Drop per Element at Specified Current	V_F	KBPC15 7.5A			1.10				V
		KBPC25 12.5A							
		KBPC35 17.5A							
Maximum Reverse DC Current at Rated D. C Blocking Voltage per Element	I_R					10.0			μA
Typical Thermal Resistance <1>	$R_{\theta JC}$					2.0			$^\circ C/W$
Operating and Storage Temperature Range	T_J, T_{STG}					-50 to +150			$^\circ C$

- Notes: 1. Thermal Resistance from Junction to Case Per leg.
 2. Bolt down on heatsink with silicone thermal compound between bridge and mounting surface for maximum heat transfer with # 10 screw
 3. Suffix "W" – Wire Lead Structure.



RATINGS AND CHARACTERISTIC CURVES (KBPC1500G KBPC1510G
KMPC2500G THRU KBPC2510G)
KBPC3500G KBPC3510G

FIG.1 - TYPICAL FORWARD OUTPUT CURRENT DERATING CURVE

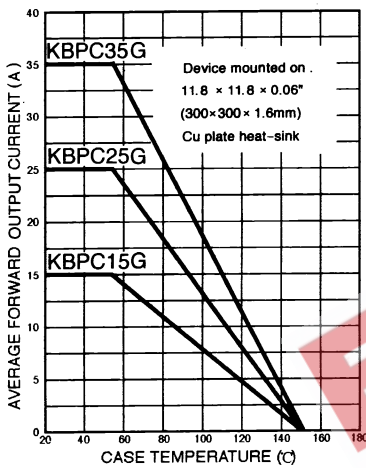


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT - PER ELEMENT

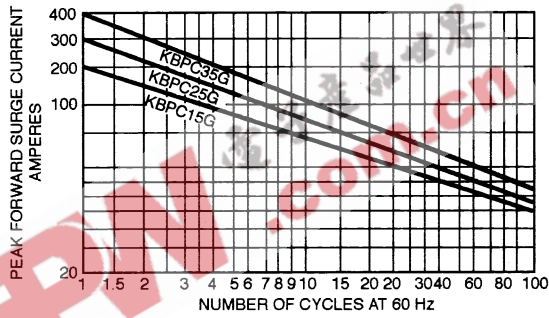


FIG.3 - TYPICAL REVERSE CHARACTERISTICS PER ELEMENT

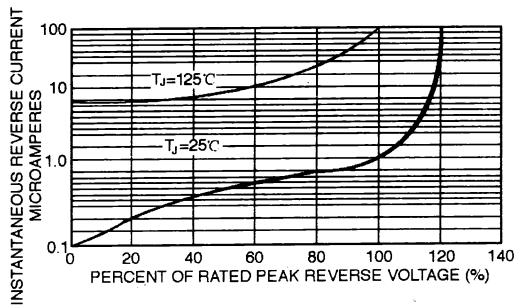


FIG.4 - TYPICAL FORWARD CHARACTERISTICS - PER ELEMENT

