

# Oven Controlled Crystal Oscillators (OCXO's)

## OC-290



### Description:

Small SMD OCXO with tight stability.  
AT and SC-cut versions available.

### Features

- 5 MHz, 10 MHz, 13 MHz standard.  
Other frequencies available from 2 to 80 MHz
- Stability as low as  $\pm 5 \times 10^{-8}$  over 0°C to 50°C
- Aging:  $1 \times 10^{-9}$  per day
- Package: 25.4 x 22 x 10.5 mm
- Supply voltage: +3.3 or +5.0 V

### Performance Characteristics

Parameter	Characteristic
Frequency:	10, 12.8, 16.384, 19.44, 20, 24.576, 20.48, 32.768, 38.88, 40 and 77.76 MHz Available from 2 MHz to 80 MHz
Package Size:	25.4 x 22.0 x 10.5 mm (1.0" x 0.9" x 0.42")
Supply Voltage (Vdd):	<b>C</b> = 5 Vdc $\pm 5\%$ <b>D</b> = 3.3 Vdc $\pm 5\%$ (Other supply voltages are available upon request)
Supply Current:	<5W peak at turn-on, <1.25W stabilized @ 25°C (Temp Range <b>B</b> & <b>D</b> ) <5W peak at turn-on, <1.5W stabilized @ 25°C (Temp Range <b>F</b> )
Output Type:	HCMOS, LVHCMOS Sinewave +0 dBm / 50 ohm 10 TTL
Standard Stability Options:	<p><b>B - 508</b> = <math>\pm 5 \times 10^{-8}</math> over 0°C to +50°C  <b>B - 758</b> = <math>\pm 7.5 \times 10^{-8}</math> over 0°C to +50°C  <b>*B - ST3</b> = Stratum 3 over 0°C to +50°C  <b>D - 758</b> = <math>\pm 7.5 \times 10^{-8}</math> over -20°C to +70°C  <b>D - 107</b> = <math>\pm 1.0 \times 10^{-7}</math> over -20°C to +70°C  <b>*D - ST3</b> = Stratum 3 over -20°C to +70°C  <b>F - 107</b> = <math>\pm 1.0 \times 10^{-7}</math> over -40°C to +85°C  <b>*F - ST3</b> = Stratum 3 over -40°C to +85°C  <b>F - 507</b> = <math>\pm 5.0 \times 10^{-7}</math> over -40°C to +85°C</p> <p><b>*STRATUM 3 per GR-1244-CORE Table 3-1</b>  Total Stability: &lt;math&gt;4.6 \times 10^{-6}&lt;/math&gt; for all causes and 10 years  vs. Holdover: &lt;math&gt;3.2 \times 10^{-7}&lt;/math&gt; for all causes and 24 hours  vs. Temperature: &lt;math&gt;2.8 \times 10^{-7}&lt;/math&gt; peak to peak</p>
Note: Not all stabilities are available with all frequency/output combinations. Please consult factory.	
Stability vs. Supply:	<5 pb for a 1% change in Supply Voltage
Aging:	<b>A:</b> $1 \times 10^{-8}$ /day, $2 \times 10^{-6}$ /year <b>C:</b> $1 \times 10^{-9}$ /day, $3 \times 10^{-7}$ /year <b>B:</b> $3 \times 10^{-9}$ /day, $1 \times 10^{-6}$ /year <b>N:</b> PTR Stratum 3
Electrical Frequency Adjust:	$10 \times 10^{-6}$ typical range (with Aging <b>A</b> or <b>B</b> ) $2 \times 10^{-6}$ typical range (with Aging <b>C</b> ) (with <b>F</b> ; no frequency adjustment)
Initial Accuracy @ +25°C:	$\pm 1.5$ ppm max after reflow


# Oven Controlled Crystal Oscillators (OCXO's)

## OC-290

### Outline Drawing




### Pad Layout

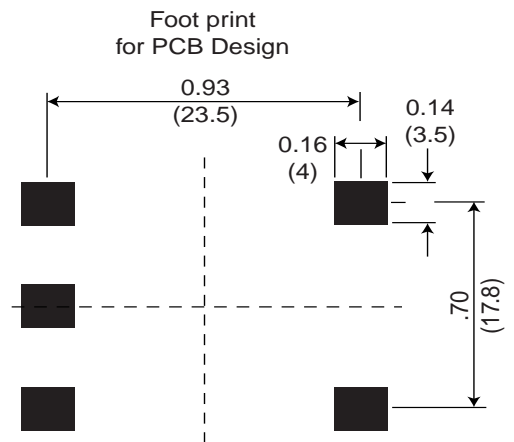

### Pin Out Information

1	Control voltage VC
2	Reference voltage output VREF
3	Supply voltage VB
4	RF-output
5	Ground, case

### Recommended Soldering Profile

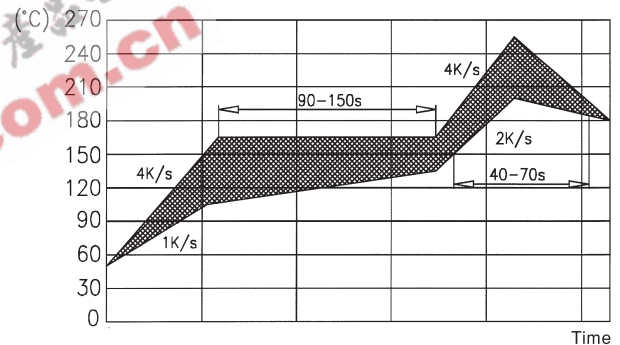

### Ordering Information

**OC - 290 - C A C - 508 C A - 10.0 MHz**

**Product Family**  
OC = OCXO

**Package**  
290 = 25.4X22 mm SMD package

**Input**  
C = 5.0V ±5%  
D = 3.3V ±5%

**Output**  
A = HCMOS, LVHCMOS  
B = 10 TTL  
G = Sinewave

**Temperature Range**  
B - 508 =  $\pm 5 \times 10^{-8}$  over 0°C to +50°C  
B - 758 =  $\pm 7.5 \times 10^{-8}$  over 0°C to +50°C  
\*B - ST3 = Stratum 3 over 0°C to +50°C  
D - 758 =  $\pm 7.5 \times 10^{-8}$  over -20°C to +70°C  
D - 107 =  $\pm 1.0 \times 10^{-7}$  over -20°C to +70°C  
\*D - ST3 = Stratum 3 over -20°C to +70°C  
F - 107 =  $\pm 1.0 \times 10^{-7}$  over -40°C to +85°C  
\*F - ST3 = Stratum 3 over -40°C to +85°C  
F - 507 =  $\pm 5.0 \times 10^{-7}$  over -40°C to +85°C

**Frequency**  
2 MHz to 80 MHz

**Electrical Frequency Adjust**  
A:  $10 \times 10^{-6}$  typical range (with Aging A or B) or  $2 \times 10^{-6}$  typical range (with Aging C)  
F: Fixed frequency. See initial accuracy.

**Aging**  
A =  $1 \times 10^{-8}$ /day,  $2 \times 10^{-6}$ /year  
B =  $3 \times 10^{-9}$ /day,  $1 \times 10^{-6}$ /year  
C =  $1 \times 10^{-9}$ /day,  $3 \times 10^{-7}$ /year  
N = PTR Stratum 3