



# SL12 THRU SL14


LOW VF SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER  
VOLTAGE - 20 to 40 Volts CURRENT - 1.0 Ampere

## FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier
- majority carrier conduction
- Low power loss, High efficiency
- High current capability, low  $V_F$
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260 °C/10 seconds at terminals

## MECHANICAL DATA

- Case: JEDEC DO-214AC molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode
- Standard packaging: 12mm tape (EIA-481)
- Weight: 0.002 ounce, 0.064 gram

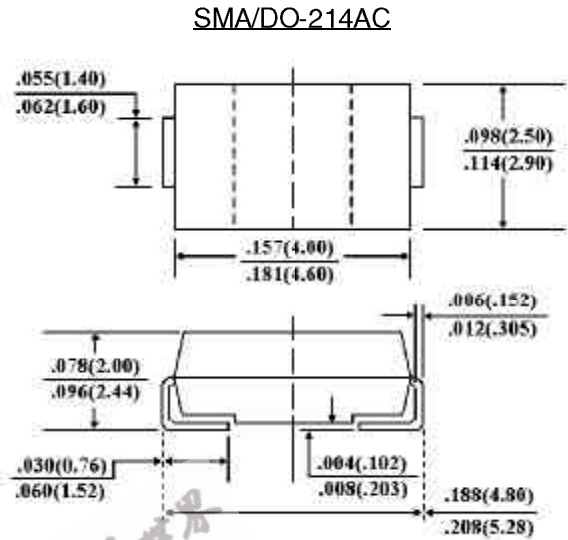

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SL12	SL13	SL14	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	Volts
Maximum RMS Voltage	$V_{RMS}$	14	21	28	Volts
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	Volts
Maximum Average Forward Rectified Current at $T_L$ (See Figure 1)	$I_{(AV)}$	1.0			Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	30.0			Amps
Maximum Instantaneous Forward Voltage at 1.0A (Note 1)	$V_F$	0.38	0.38	0.40	Volts
Maximum DC Reverse Current $T_A=25$ °C(Note 1) At Rated DC Blocking Voltage $T_A=100$ °C	$I_R$	0.5 20.0			mA
Maximum Thermal Resistance (Note 2)	$R_{\theta KJL}$ $R_{\theta KJA}$	28 88			°C/W
Operating Junction Temperature Range	$T_J$	-50 to +125			°C
Storage Temperature Range	$T_{STG}$	-50 to +150			°C

## NOTES:

- Pulse Test with PW=300 µsec, 1% Duty Cycle.
- Mounted on P.C.Board with 5.0mm<sup>2</sup> (.013mm thick) copper pad areas.

# RATING AND CHARACTERISTIC CURVES

SL12 THRU SL14

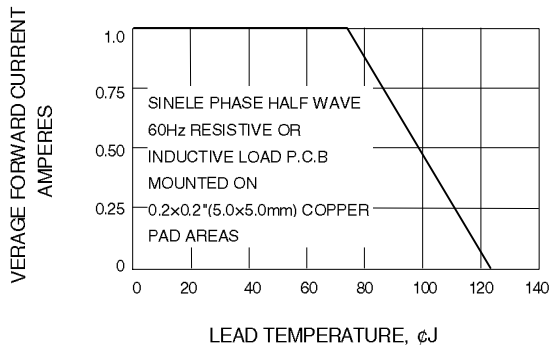


Fig. 1- FORWARD CURRENT DERATING CURVE

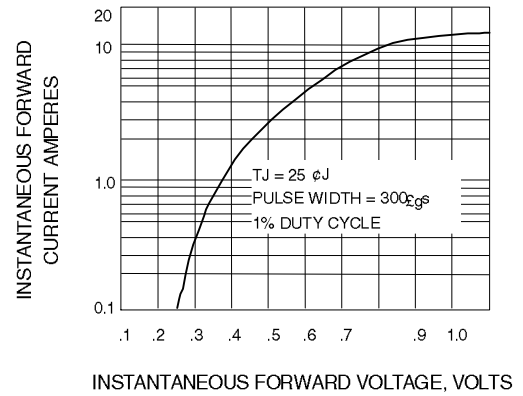


Fig. 2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

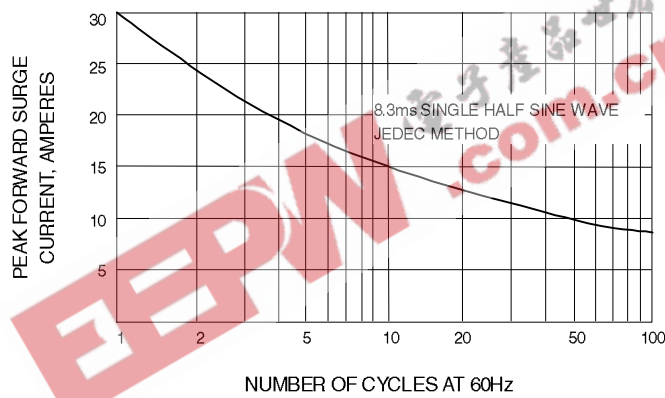


Fig. 3- MAXIMUM NON-REPETITIVE SURGE CURRENT

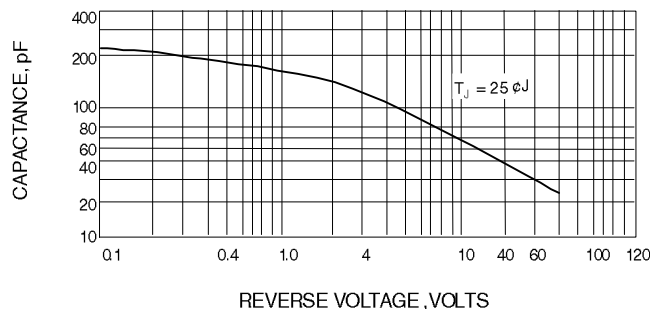


Fig. 4- TYPICAL JUNCTION CAPACITANCE