
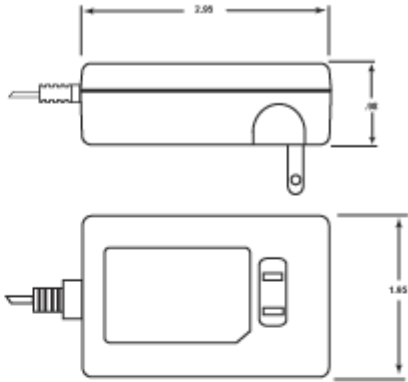


## WP12

### 12 Watt Single Output Regulated Power Supplies






**Features:**  
 N.A. AC input  
 Fully enclosed plastic case  
 Fully regulated output  
 High Efficiency  
 Warranty: 5 years

**Environmental**  
 Operating temperature.....0° C to 40° C  
 Storage temperature.....-55° C to 85° C  
 Weight: 0.5 lbs

**EMI**  
 Meets FCC class B

**Safety**  
 UL 1950  
 cUL Listed to CSA 22.2 No. 950

Polarity: COM  +V

**Electrical specifications**

**Input**  
 Voltage.....90-132VAC  
 Current.....0.75A  
 Frequency.....47-63 Hz  
 Input connector.....2 Pin NEMA 5/15 plug

**Output**  
 Line regulation.....TYP 1%  
 Load regulation.....5% Max  
 Set point.....5% of rated output  
 Hold up time.....12 ms min. at full load 115 V

Over voltage protection.....Built-in  
 Over current protection.....Built-in  
 Short circuit protection.....Pulsing Mode, auto recovery  
 Ripple/noise(Vp-p).....1%  
 Output connector.....barrel type(5.5 x 2.5 x 9.5mm)

**Output Electrical Specifications**

Model No.	Voltage	Power	Current
WP1205-760	5	12	2.4A
WP1212-760	12	12	1A
WP1215-760	15	12	0.8A
WP1218-760	18	12	0.67A
WP1224-760	24	12	0.5A

[Quality Power Supplies](#) | 
 [Agency Certifications](#) | 
 [Output Connectors](#) | 
 [Custom Requests](#) | 
 [About Us](#) | 
 [Qu Management Team](#) | 
 [Job Opportunites](#) | 
 [Elpac News](#) | 
 [Sales Representatives](#) | 
 [Distributors](#) | 
 [Catalog Reque](#)  
[Power Supplies](#) | 
 [External Power Supplies](#) | 
 [Open Frame Power Supplies](#) | 
 [Medical Power Supplies](#) | 
 [Custor](#)

Copyright © 2003, Elpac Power Supp